



Φ
C.V.L.

IP44 COLLECTION

Élégance des formes, aux accents minimalistes et aux finitions soignées. Retrouvez l'esprit CVL dans une collection d'appliques esthétiques et fonctionnelles, spécifiquement conçues pour la salle de bain.



Elegant shapes, minimalist accents and immaculate finishes. Find the CVL spirit in a collection of aesthetic and functional wall lights, specifically designed for bathrooms.




IP BACKSTAGE




Finitions Finishes	Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper	
	Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper	
Matériaux Material	Laiton massif Solid Brass	Verre triplex opale soufflé bouche Opal triplex mouth-blown glass			
Source Lamping	IP Backstage 4				
	LED intégrée	480 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	480 lm	3 000°K	Remote power supply 24 V incl.	Standard version not dim.
	IP Backstage 6				
	LED intégrée	720 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	720 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.
	IP Backstage 8				
	LED intégrée	960 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	960 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.
	IP Backstage Corner 4				
	LED intégrée	480 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	480 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.
IP Backstage Corner 6					
LED intégrée	720 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard	
Integrated LED	720 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.	
IP Backstage Corner 8					
LED intégrée	960 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard	
Integrated LED	960 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.	
Norme Standard	IP44	Classe II			
	IP44	Class II			
Designer	Émilie Cathelineau				


IP Backstage Linear L8

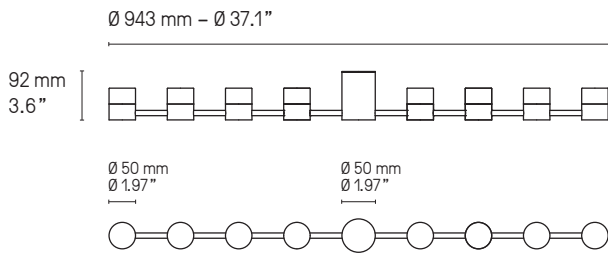


IP Backstage Corner C8

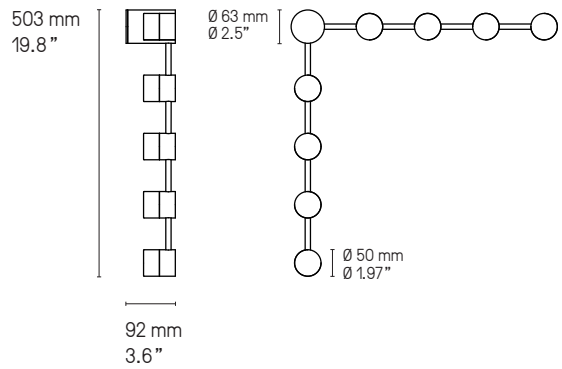


IP Backstage Linear L6

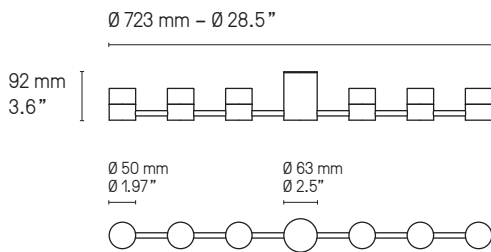


IP Backstage Corner C6

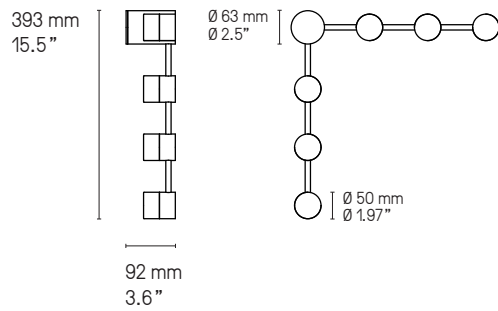

IP Backstage Linear L4

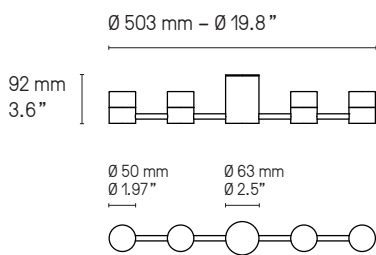

IP Backstage Corner C4

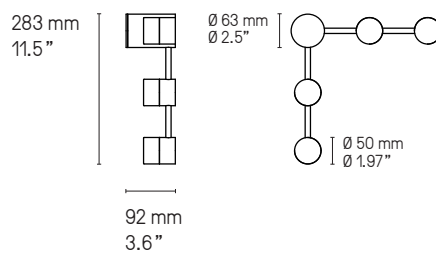

US Version fitted plate to cover outlet power box







IP Backstage Corner C8 SG



IP Backstage Linear L6 PN



IP Backstage Linear L4 SB



IP Backstage Linear L6 SG



IP Backstage Corner C8 PB




IP CALÉ(E)




Finitions Finishes	① + ②	Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper	
		Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper	
Matériaux Material		Laiton massif Solid Brass	Diffuseur polycarbonate satiné Satin Polycarbonate diffuser			
Source Lamping		LED intégrée Integrated LED	700 lm 700 lm	3000°K 3000°K	Alimentation 24V intégrée Int. power supply 24V included	Non variable en standard Standard version not dimable
Norme Standard		IP44 IP44	Classe II Class II			
Designer		POOL				


VH

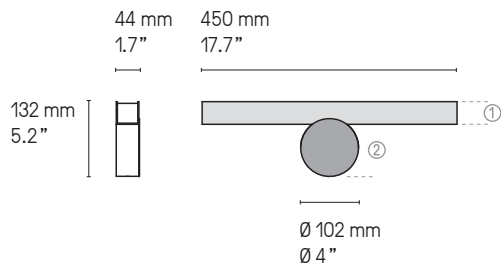

VV

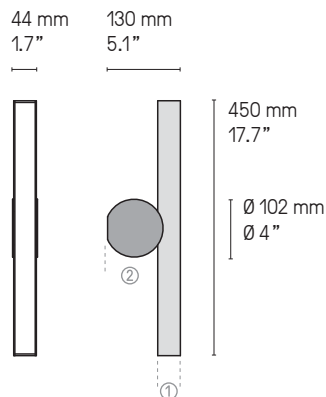

VF

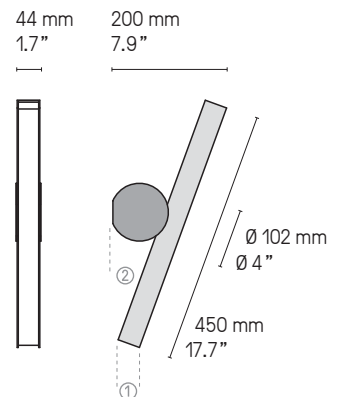

Les appliques Calé(e)s ne sont pas réglables. Ce sont 3 modèles différents.
Calé(e) wall lights are not mobile. These are 3 different fixed models.



IP CORNET



Finitions Finishes

Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper
Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper

Matériaux Material

Laiton massif Solid Brass	Verre triplex opale soufflé bouche Opal triplex mouth-blown glass
------------------------------	--

Source Lamping

G9 LED 5W max. non fournie G9 LED 5W max. not included	Variable Dimmable
---	----------------------


Norme Standard

IP44	Classe II
IP44	Class II

Designer

Émilie Cathelineau

* Les luminaires variables nécessitent l'utilisation d'ampoules compatibles avec la variation
All dimmable light fixture require the use of compatible bulbs

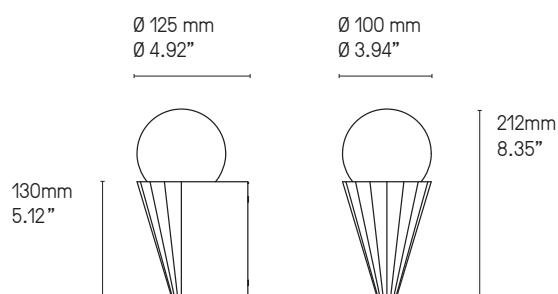

IP Cornet SC



IP Cornet SB













IP Cornet SG



IP GAMMA



Finitions Finishes	 Laiton satiné SB Satin brass	 Graphite satiné SG Satin graphite	 Nickel satiné SN Satin nickel	 Cuivre satiné SC Satin copper
	 Laiton poli PB Polished brass	 Graphite poli PG Polished graphite	 Nickel poli PN Polished nickel	 Cuivre poli PC Polished copper
Matériaux Material	Laiton massif Solid Brass	Diffuseur polycarbonate blanc White Polycarbonate diffuser		
Source Lamping	LED 600 lm 3000°K	Alimentation 24V intégrée Int. power supply 24V included	IP44 Non variable en standard IP44 Standard version not dimmable	
Norme Standard	IP44 IP44	Classe II Class II		
Designer	Sylvain Willenz			



IP Gamma SB

IP Gamma SG

IP Gamma SN

IP Gamma SC



IP LINK




Finitions Finishes	Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper
	Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper

Matériaux Material	Laiton massif Solid Brass	Diffuseur polycarbonate satiné Satin Polycarbonate diffuser	Ruban Led sans points visibles Led strip without visible dots
-------------------------------	------------------------------	--	--




Source Lamping	IP Link 410 (410 mm - 16.1")				
	LED intégrée	150 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	150 lm	3 000°K	Remote power supply 24 V incl.	Standard version not dim.
	IP Link 580 (580 mm - 22.8")				
	LED intégrée	300 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	300 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.
	IP Link double 610 (610 mm - 24.1")				
	LED intégrée	300 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	300 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.
	IP Link double 960 (960 mm - 37.8")				
	LED intégrée	600 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	600 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.
	IP Link double 1300 (1300 mm - 51.2")				
	LED intégrée	800 lm	3 000°K	Alimentation 24 V intégrée	Non variable en standard
	Integrated LED	800 lm	3 000°K	Int. power supply 24 V included	Standard version not dim.

Norme Standard	IP44	Classe II
	IP44	Class II

Designer	Émilie Cathelineau
-----------------	--------------------

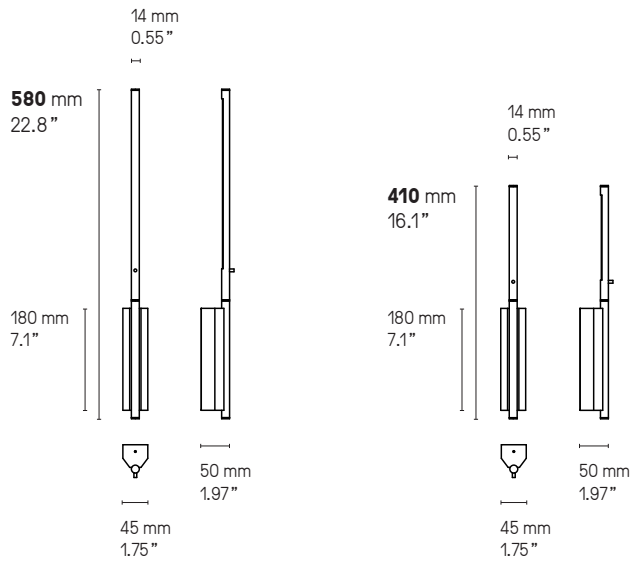

Longueurs sur mesure possibles.
Custom dimensions available upon request.

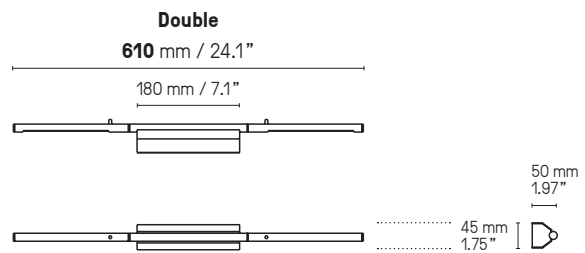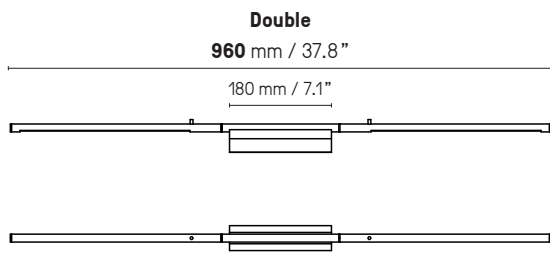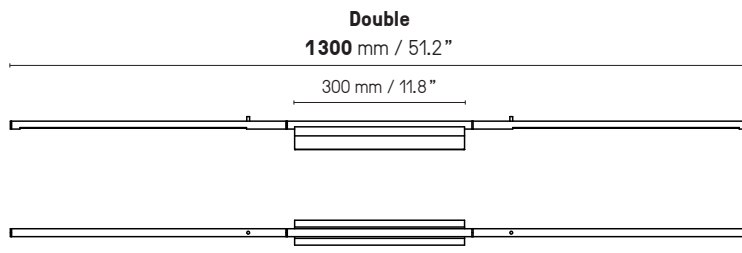



IP Link Double 960 PG



IPLink 410 SB



IP METROP



Finitions Finishes

① + ②

Laiton satiné SB Satin brass	Graphite satiné SG Satin graphite	Nickel satiné SN Satin nickel	Cuivre satiné SC Satin copper
Laiton poli PB Polished brass	Graphite poli PG Polished graphite	Nickel poli PN Polished nickel	Cuivre poli PC Polished copper

Matériaux Material

Laiton massif Solid Brass	Diffuseur polycarbonate satiné Satin Polycarbonate diffuser	Ruban Led sans points visibles Led strip without visible dots
------------------------------	--	--

Source Lamping


IP Metrop 325					
LED intégrée	300 lm	3000°K	Alimentation 24V intégrée	IP44	Non variable en standard
Integrated LED	300 lm	3000°K	Remote power supply 24 V incl.	IP44	Standard version not dim.
IP Metrop 525					
LED intégrée	500 lm	3000°K	Alimentation 24V intégrée	IP44	Non variable en standard
Integrated LED	500 lm	3000°K	Int. power supply 24V included	IP44	Standard version not dim.
IP Metrop 780					
LED intégrée	750 lm	3000°K	Alimentation 24V intégrée	IP44	Non variable en standard
Integrated LED	750 lm	3000°K	Int. power supply 24V included	IP44	Standard version not dim.

Norme Standard

IP44	Classe II
IP44	Class II

Designer


Émilie Cathelineau

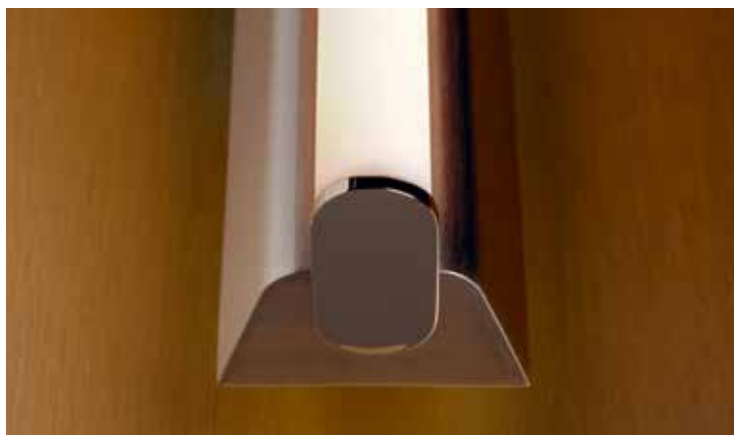


IP Metrop SG/PG

IP Metrop


325 mm
12.8"

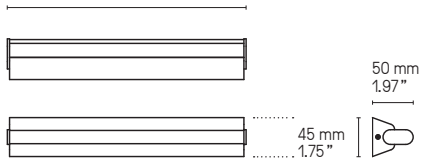

525 mm
20.7"

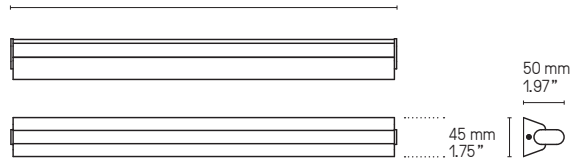

780 mm
30.7"

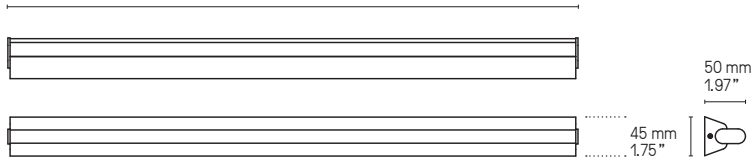


Longueurs sur mesure possibles.
Custom dimensions available upon request.



IP Metrop 325 PB



IP Metrop 325 SG



IP Metrop 325 SN/SG




IP Metrop 325 PN



IP Metrop 325 PC

US Version fitted plate to cover outlet power box

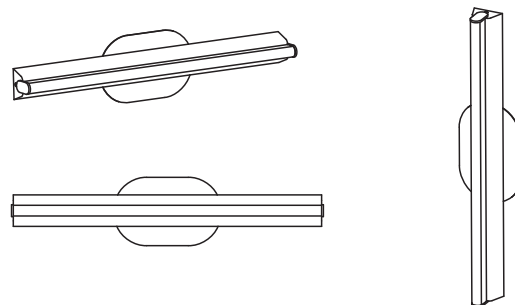













IP Metrop SB/SG



IP STORM



Finitions Finishes	 Laiton satiné SB Satin brass	 Graphite satiné SG Satin graphite	 Nickel satiné SN Satin nickel	 Cuivre satiné SC Satin copper
	 Laiton poli PB Polished brass	 Graphite poli PG Polished graphite	 Nickel poli PN Polished nickel	 Cuivre poli PC Polished copper
Matériaux Material	Laiton massif Solid Brass	Diffuseur polycarbonate blanc White Polycarbonate diffuser		
Source Lamping	LED 470 lm 3000°K	Alimentation 24V intégrée Int. power supply 24V included	IP44 Non variable en standard IP44 Standard version not dimmable	
Norme Standard	IP44	Classe II		
	IP44	Class II		
Designer	Émilie Cathelineau			



IP Storm SB


NUANCIER - FINISH OPTIONS



LAITON - BRASS

- | | |
|-------------------------------------|---|
| ① Laiton satiné
SB Satin brass | ② Graphite satiné
SG Satin graphite |
| ③ Nickel satiné
SN Satin nickel | ④ Cuivre satiné
SC Satin copper |
| ⑤ Laiton poli
PB Polished brass | ⑥ Graphite poli
PG Polished graphite |
| ⑦ Nickel poli
PN Polished nickel | ⑧ Cuivre poli
PC Polished copper |


ABAT-JOURS - LAMPSHADES



Drop Paper® 100




Drop Paper® 101




Drop Paper® 103



Chinette blanche
White chinette



Chinette noire
Black chinette



Duke
Duke

CÂBLES - CABLES



Tissu noir
Black textile



Tissu or
Gold textile

VERRERIE - GLASS



Opale
Opal



Opale et écaïlle
Opal and patterned



Claire et écaïlle
Clear and patterned



CVL LUMINAIRES

79 ROUTE DE LA CHEVALLERIE – 49770 LONGUENÉE-EN-ANJOU – FRANCE

TEL. +33 (0) 2 41 32 67 54

EMAIL : CONTACT@CVL-LUMINAIRES.FR

WWW.CVL-LUMINAIRES.FR

Brand identity & art direction: [POOL](#) Layout & production supervision: [deuxpointdeux](#)
Photos: [Yannick Labrousse](#) 3D: [AR.visual](#) Texts & translation: [CVL](#)

Download our latest catalogue [here](#)