


davide groppi

US - HANDBOOK 2021

WIRELESS	5	WALL	105	SYSTEM	171
35MM	17	DOT P - cETLus certification	119	DOT ENDLESS	217
LIGHT MY FIRE	21	EDISON'S NIGHTMARE	145	DOT ENDLESS IOT	219
PoPuP	13	FILM	153	DOT SISTEMA - cETLus certification	229
TeToTeT	7	FOIL	135	ENDLESS	207
TeToTeT Flûte	11	FOIL LED - cETLus certification	135	FLASH 6 - cETLus certification	179
		FOLDER	137	FLASH 12 - cETLus certification	181
		MERIDIANA	223	INFINITO 6 - cETLus certification	175
TABLE	23	MIRA - cETLus certification	107	INFINITO 12 - cETLus certification	177
CALVINO	29	MIRA MAGNETIC	111	MERIDIANA - cETLus certification	223
MOON T - cETLus certification	27	MIRA MAGNETIC P	115	OHM ABSOLUTE	191
MORSETTO	31	MIRA SWITCH - cETLus certification	109	OHM ROUNDTRIP	197
PIGRECO	25	MORSETTO P	123	SISTEMA - EUTRAC cULus certification	227
		OZEN - cETLus certification	141	SPOT ENDLESS	213
		OZEN VETRO - cETLus certification	143	SPOT ENDLESS IOT	215
FLOOR	33	PAGINA	147		
HASHI	51	PIÙ - cETLus certification	139		
MASAI - cETLus certification	47	RAIL	149	RECESSED	231
MOON F - cETLus certification	59	SOL 1	131	BUCO 58 - cETLus certification	251
MOVIE	55	SOL 1 LED - cETLus certification	131	MINI - cETLus certification	245
ORIGINE 290	35	SOL 2	133	MINI BIT - cETLus certification	247
ORIGINE 390	35	SOL 2 LED - cETLus certification	133	MIRA R - cETLus certification	249
ORIGINE 490	35	SPOT	121	NULLA - cETLus certification	233
PABLO	53	TOAST - cETLus certification	127	NULLA 25 - cETLus certification	239
Q	57	TOAST LED - cETLus certification	125	NULLA 25 T24 - Title 24 Compliant and cETLus certification	241
SAMPEI 230	41			QUAD - cETLus certification	253
SAMPEI 260	41				
SAMPEI 290	43				
SAMPEI 440	43	CEILING	155	OUTDOOR	255
SHOJI	61	DOT PL	161	BUBKA - cETLus certification	265
		HAKO PL LED	169	BUBKA BOLLARD - cETLus certification	267
		MINI PL - cETLus certification	165	GRILLO - cETLus certification	263
SUSPENSION	63	NULLA PL	159	IMU	257
CARTESIO	91	PUNTO PL	167	LENTA	269
CARTESIO 90	91	SANMARTINO	157	ORIGINE OUTDOOR	259
CATHODE	85	TRICK TRACK	163	OUT 35 - cETLus certification	273
ChainDelier 1	93			OUT 44 - cETLus certification	281
ChainDelier 2	95			OUT 58 - cETLus certification	277
FOSBURY	71			OUT 100 - cETLus certification	279
LED IS MORE	65			SAMPEI 440 OUTDOOR	261
MISS 1 - cETLus certification	81			SHOJI OUTDOOR	271
MISS 2 - cETLus certification	83				
MOON 60 - cETLus certification	73				
MOON 60 DE - cETLus certification	75				
MOON 80 - cETLus certification	73				
MOON 120 - cETLus certification	77				
MOON 200 - cETLus certification	77				
NEURO - cETLus certification	67				
OVO	89				
OVONELPIATTO	87			INFORMATION	285
SHANGHAI	99			COMMERCIAL TERMS	287
SIMBIOSI	79			ALPHABETICAL INDEX	289


WIRELESS

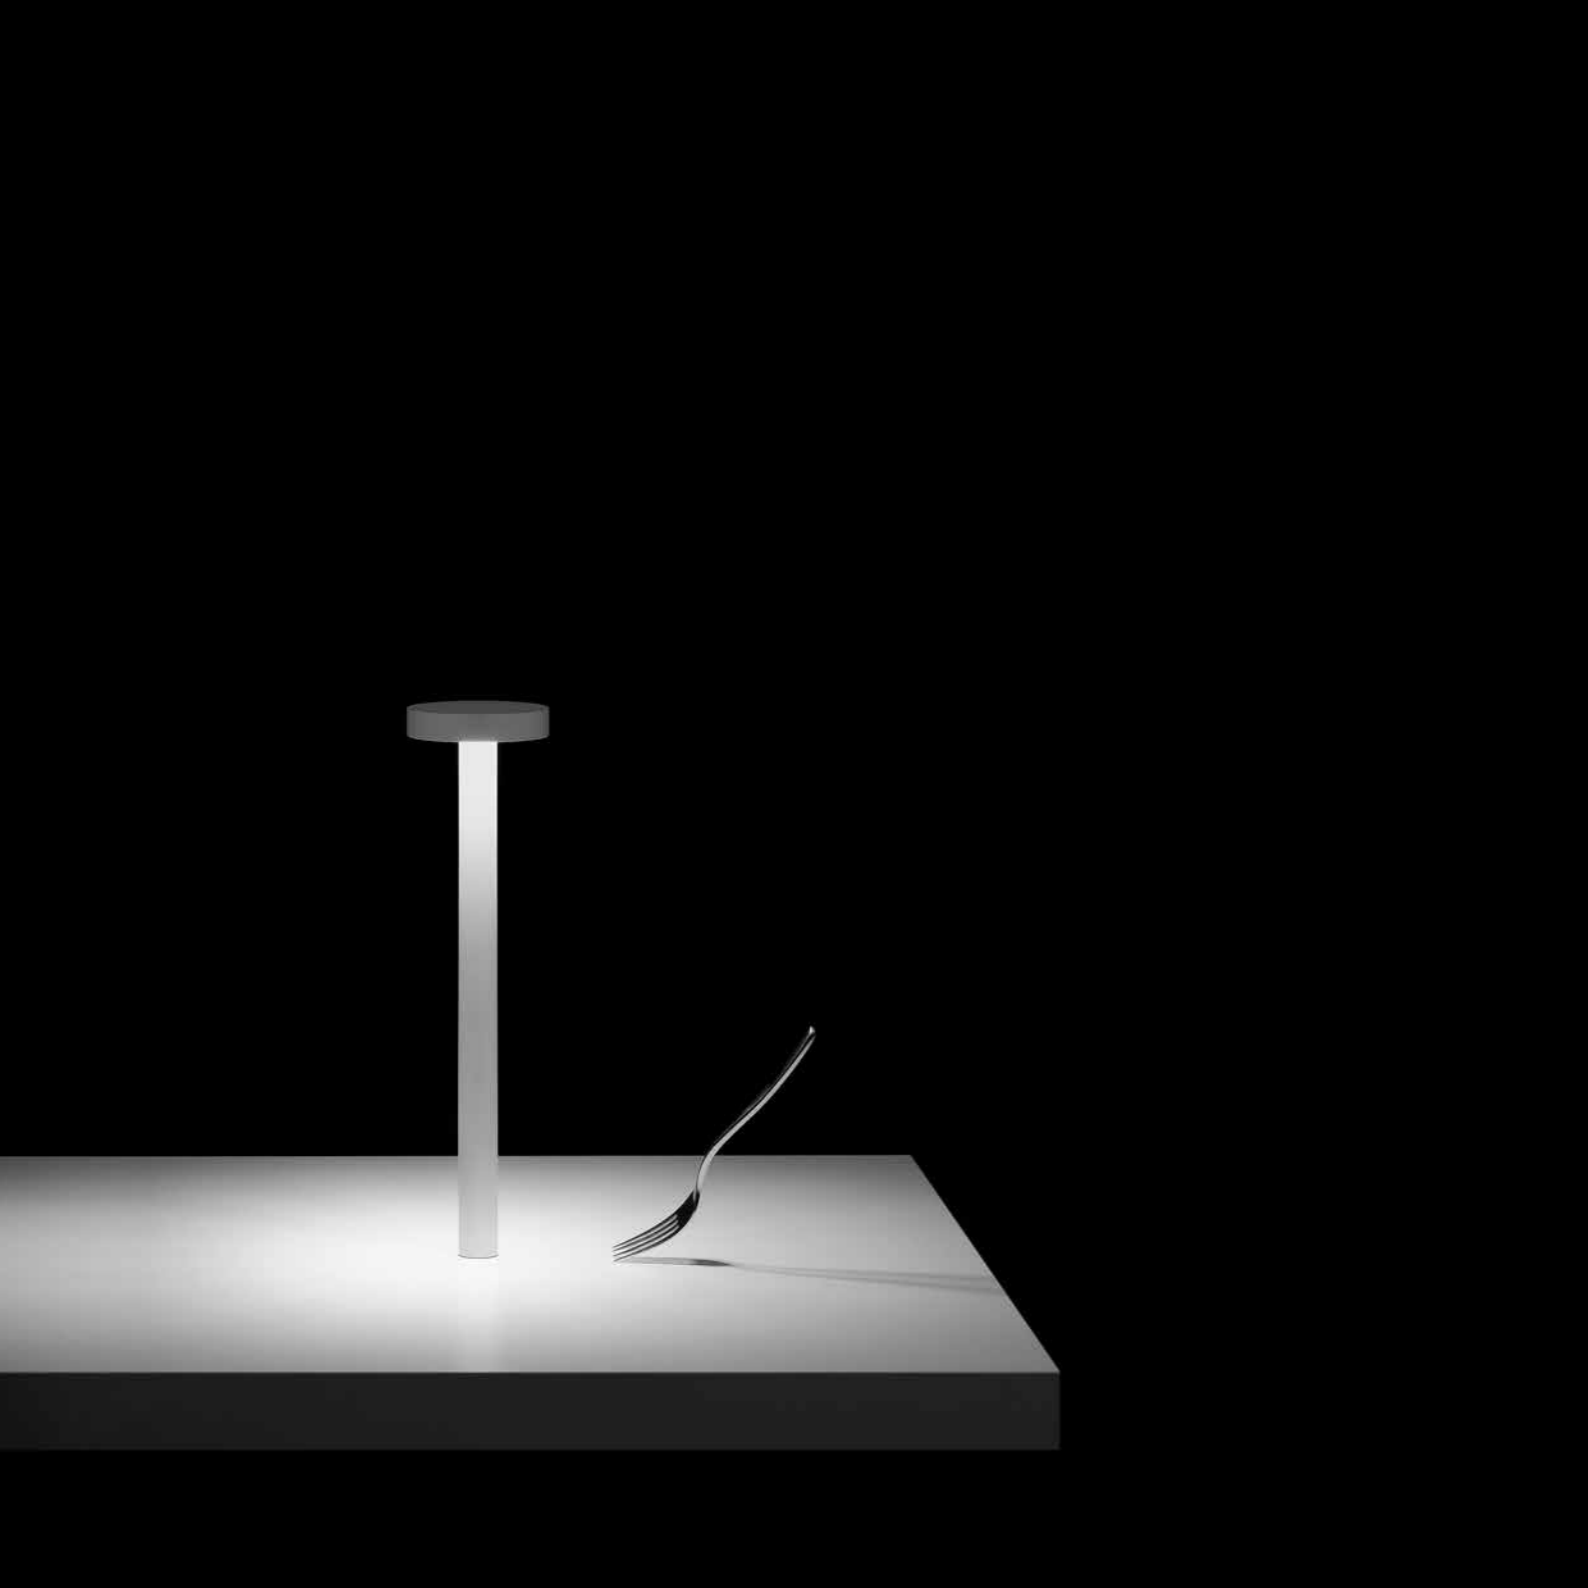

Compasso d'Oro ADI
Mention of Honour
2016

DESIGN DAVIDE GROPPI - 2013
TABLE LAMP - ABS - METHACRYLATE - METAL

Tetatet

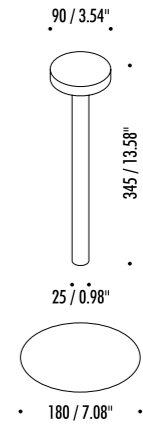


1A0310303	MATT WHITE - 3000K	2 W LED - 178 lm - CRI > 80 RECHARGEABLE BATTERY 4,8 V NiMH 4300 mAh MAGNETIC FIXING - INCLUDES CHARGER INPUT 100-240 V - 50/60 Hz ON/OFF TOUCH - BATTERY LIFE TWELVE HOURS MINIMUM 3 PIECES PER FINISH
1A0310303-27	MATT WHITE - 2700K	
1A0310403	MATT BLACK - 3000K	
1A0310403-27	MATT BLACK - 2700K	
1A0311803	MATT GOLD - 3000K	
1A0311803-27	MATT GOLD - 2700K	

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

1A0430303	MATT WHITE	RECHARGEABLE BATTERY 4,8 V NiMH 4300 mAh
1A0430403	MATT BLACK	
1A0431803	MATT GOLD	


50650610	STANDARD	CHARGER INPUT 100-240 V - 50/60 Hz - OUTPUT 800 mA DC - 4,8-12 V - 36 W - IP20
----------	----------	---



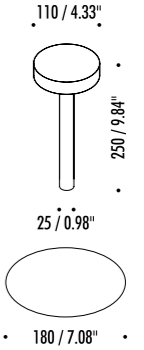

18970303	MATT WHITE - 3000K	2 W LED - 180 lm - CRI > 80
18970303-27	MATT WHITE - 2700K	RECHARGEABLE LITHIUM BATTERY 5 V DC - Li-Poly 3900 mAh - MICRO USB
		TRANSPARENT STEM - MAGNETIC FIXING
		INCLUDES CHARGER INPUT 100-240 V - 50/60 Hz
		BATTERY LIFE NINE HOURS
		MINIMUM 3 PIECES

OPTIONAL ACCESSORIES		
50650660	STANDARD	CHARGER
		INPUT 100-240 V - 50/60 Hz - OUTPUT 5 V DC - 5 W - IP20

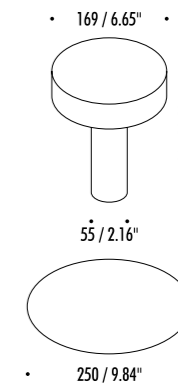



18450303	MATT WHITE	2 W LED - 3000K - 183 lm - CRI > 80 5 W AUDIO - 50-20000 Hz RECHARGEABLE BATTERY 12 V NiMH 3700 mAh MAGNETIC FIXING - INCLUDES CHARGER INPUT 100-240 V - 50/60 Hz BATTERY LIFE: TWELVE HOURS FOR LIGHT ONLY AND THIRTY HOURS FOR AUDIO ONLY AT MEDIUM VOLUME
----------	------------	--

OPTIONAL ACCESSORIES


18900303	MATT WHITE	RECHARGEABLE BATTERY 12 V NiMH 3700 mAh
----------	------------	--


50650610	STANDARD	CHARGER INPUT 100-240 V - 50/60 Hz - OUTPUT 800 mA DC - 4,8-12 V - 36 W - IP20
----------	----------	---



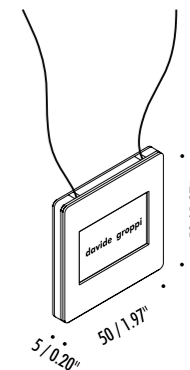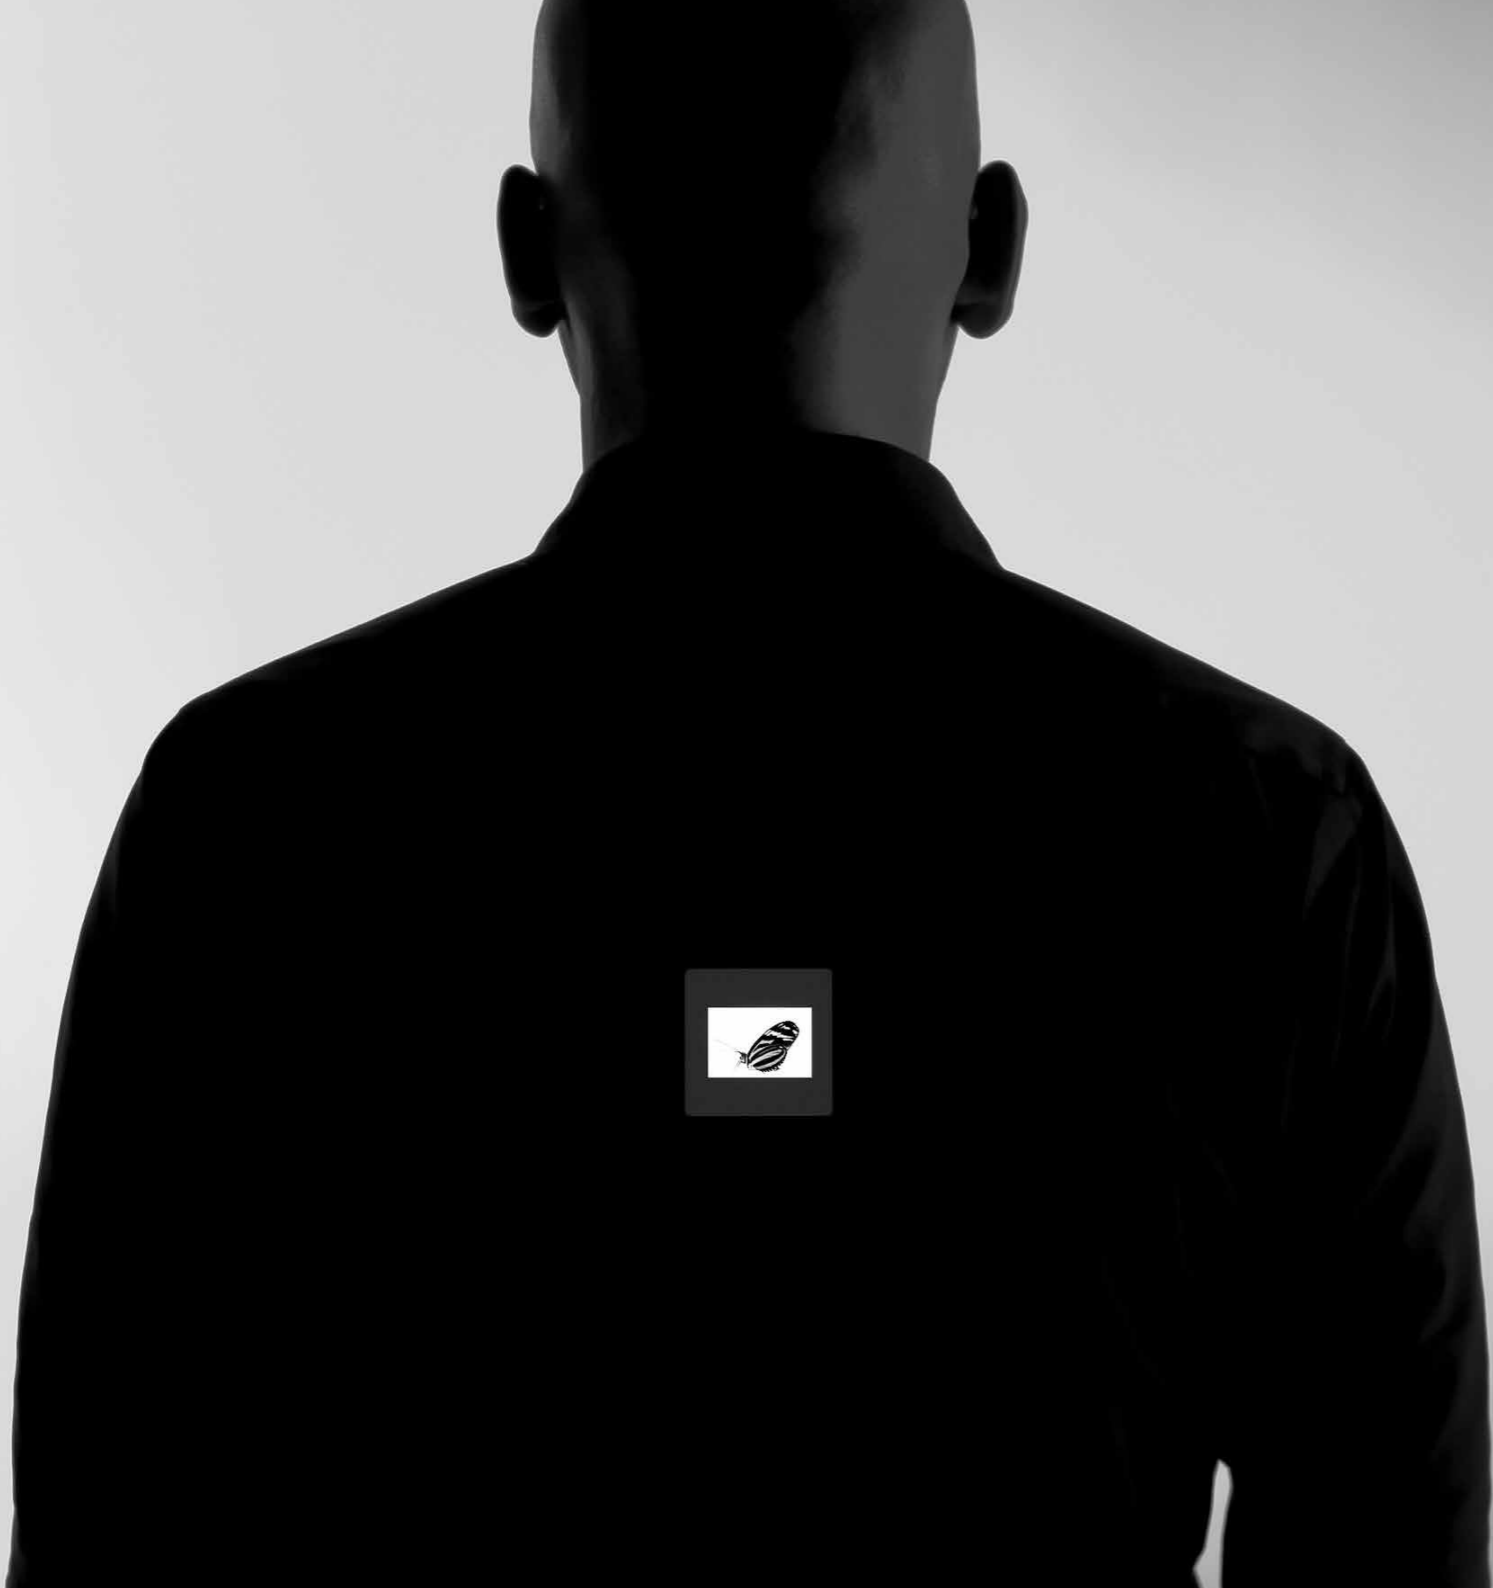

15090003	STANDARD	0,3 W LED BATTERIES 2 x CR2032 INCLUDED SLOWLY FLASHING LIGHT CUSTOMIZABLE IMAGE - IMAGE NOT INCLUDED MINIMUM 3 PIECES

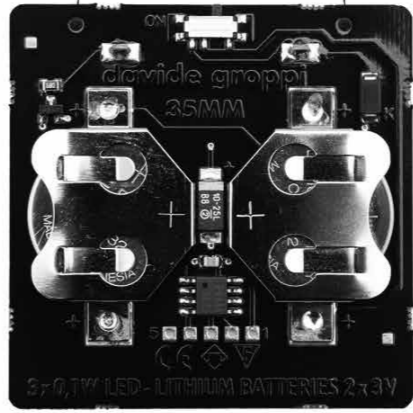


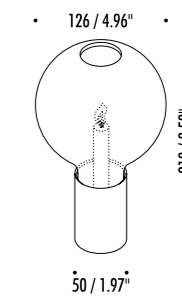


17520303	MATT WHITE	CANDLE INCLUDED - MINIMUM 3 PIECES

OPTIONAL ACCESSORIES


18200003	STANDARD	10 CANDLES

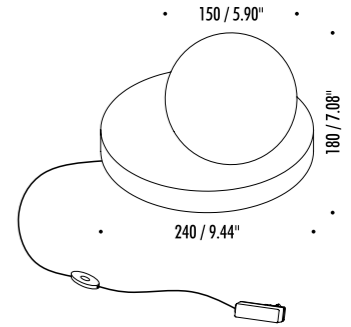


19300003	STANDARD	24 V DC - 6,5 W LED - 3000K - 450 lm - CRI > 90 BLACK CABLE - DIMMER INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz

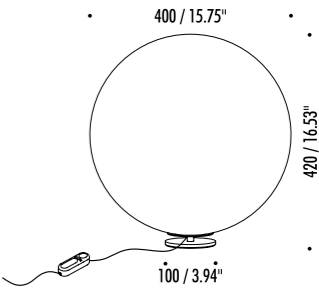

19800003	STANDARD	120 V - 60 Hz - MAX 18 W LED - E26 WHITE CABLE - DIMMER - BULB NOT INCLUDED

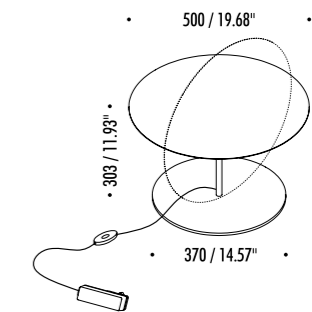

19480003	STANDARD - 3000K	24 V DC - 18 W LED - 1372 lm - CRI > 80
19480003-27	STANDARD - 2700K	BRASS STEM - MIRROR - BLACK CABLE - BLACK BASE
		ADJUSTABLE - DIMMER
		INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz


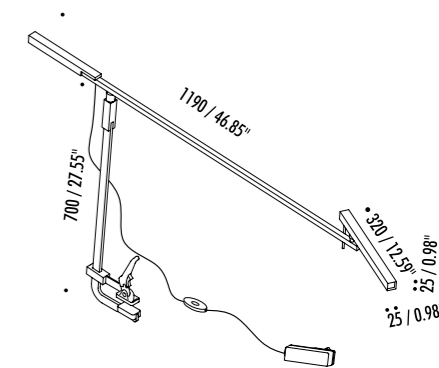


19070403	MATT BLACK	24 V DC - 13 W LED - 3000K - 823 lm - CRI > 90 BLACK CABLE - RED LEVER CLAMP ADJUSTABLE - DIMMER INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz

FLOOR



DRIVER

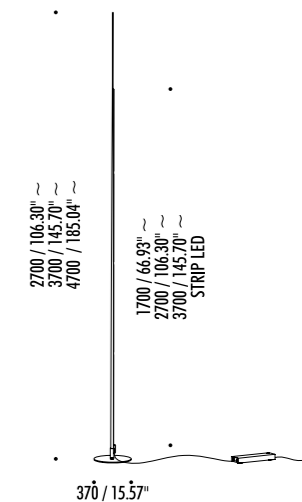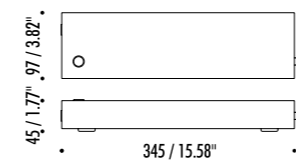

1A1030403	MATT BLACK - 3000K	ORIGINE 290 24 V DC - 20 W LED - 1000 lm - CRI > 90
1A1030403-27	MATT BLACK - 2700K	BLACK CABLE - DIMMER

1A1040403	MATT BLACK - 3000K	ORIGINE 390 24 V DC - 30 W LED - 1680 lm - CRI > 90
1A1040403-27	MATT BLACK - 2700K	BLACK CABLE - DIMMER

1A1050403	MATT BLACK - 3000K	ORIGINE 490 24 V DC - 40 W LED - 2380 lm - CRI > 90
1A1050403-27	MATT BLACK - 2700K	BLACK CABLE - DIMMER









Compasso d'Oro ADI
Award 2014

DESIGN ENZO CALABRESE - DAVIDE GROPPI - 2011
FLOOR LAMP - FIBERGLASS - METAL

SAMPEI

DRIVER

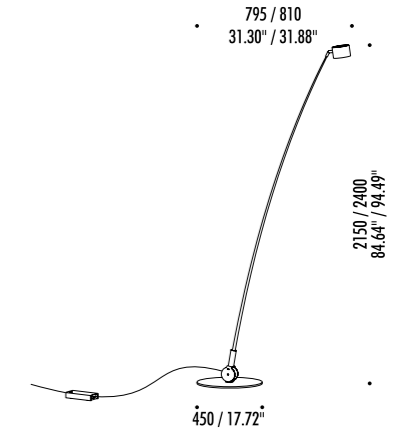

18310303	MATT WHITE - 3000K	SAMPEI 230 120 V - 60 Hz - 17 W LED 1456 lm (3000K) / 1370 lm (2700K) - CRI 90 WHITE CABLE - ADJUSTABLE - DIMMER
18310303-27	MATT WHITE - 2700K	
18310403	MATT BLACK - 3000K	SAMPEI 230 120 V - 60 Hz - 17 W LED 1456 lm (3000K) / 1370 lm (2700K) - CRI 90 BLACK CABLE - ADJUSTABLE - DIMMER
18310403-27	MATT BLACK - 2700K	
18320303	MATT WHITE - 3000K	SAMPEI 260 120 V - 60 Hz - 17 W LED 1456 lm (3000K) / 1370 lm (2700K) - CRI 90 WHITE CABLE - ADJUSTABLE - DIMMER
18320303-27	MATT WHITE - 2700K	
18320403	MATT BLACK - 3000K	SAMPEI 260 120 V - 60 Hz - 17 W LED 1456 lm (3000K) / 1370 lm (2700K) - CRI 90 BLACK CABLE - ADJUSTABLE - DIMMER
18320403-27	MATT BLACK - 2700K	





Compasso d'Oro ADI
Award 2014

DESIGN ENZO CALABRESE - DAVIDE GROPPI - 2011
FLOOR LAMP - FIBERGLASS - METAL


SAMPEI

DRIVER

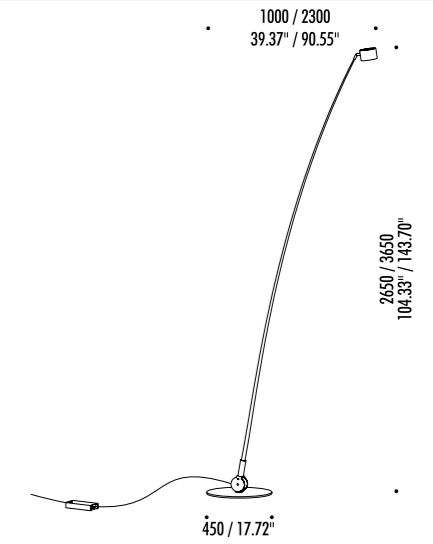


18330303	MATT WHITE - 3000K	SAMPEI 290 120 V - 60 Hz - 17 W LED 1456 lm (3000K) / 1370 lm (2700K) - CRI 90 WHITE CABLE - ADJUSTABLE - DIMMER
18330303-27	MATT WHITE - 2700K	
18330403	MATT BLACK - 3000K	SAMPEI 290 120 V - 60 Hz - 17 W LED 1456 lm (3000K) / 1370 lm (2700K) - CRI 90 BLACK CABLE - ADJUSTABLE - DIMMER
18330403-27	MATT BLACK - 2700K	

18340303	MATT WHITE - 3000K	SAMPEI 440 120 V - 60 Hz - 17 W LED 1584 lm (3000K) / 1491 lm (2700K) - CRI 90 WHITE CABLE - ADJUSTABLE - DIMMER
18340303-27	MATT WHITE - 2700K	
18340403	MATT BLACK - 3000K	SAMPEI 440 120 V - 60 Hz - 17 W LED 1584 lm (3000K) / 1491 lm (2700K) - CRI 90 BLACK CABLE - ADJUSTABLE - DIMMER
18340403-27	MATT BLACK - 2700K	


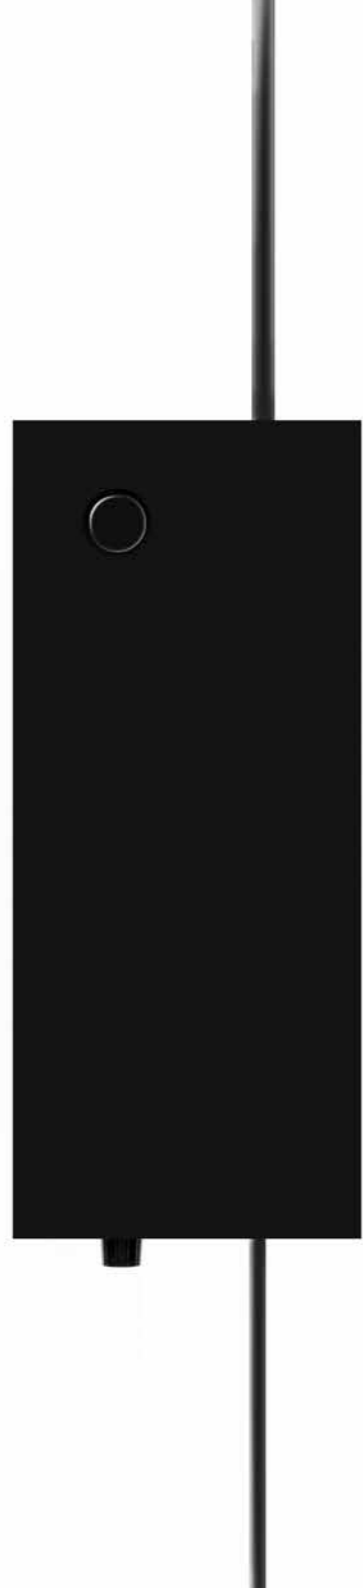




CEILING ROSE




DRIVER

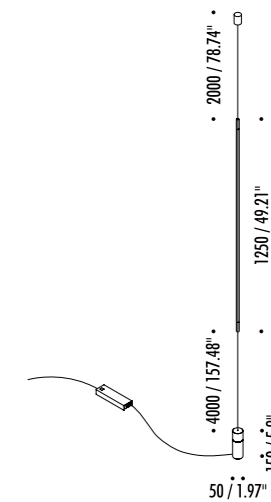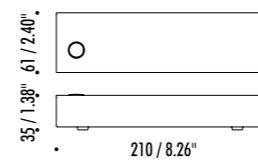


18060303	MATT WHITE - 3000K	120 V - 60 Hz - 16 W LED - 619 lm - CRI > 90 POWER SUPPLY WITH PLUG - STEEL CABLE - WHITE CEILING ROSE DIMMER
18060303-27	MATT WHITE - 2700K	
18060403	MATT BLACK - 3000K	
18060403-27	MATT BLACK - 2700K	
18060803	BRUSHED BRASS - 3000K	
18060803-27	BRUSHED BRASS - 2700K	


OPTIONAL ACCESSORIES

1A0510003	STANDARD	SLOPED CEILING FIXING KIT SEE PAGE 101
1A1680003	STANDARD	SUSPENSION KIT STEEL CABLE 10 m


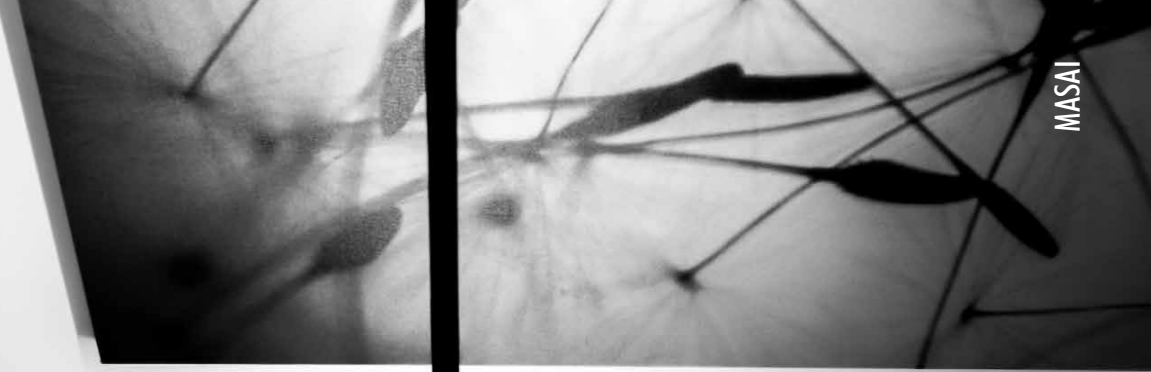


MASAI

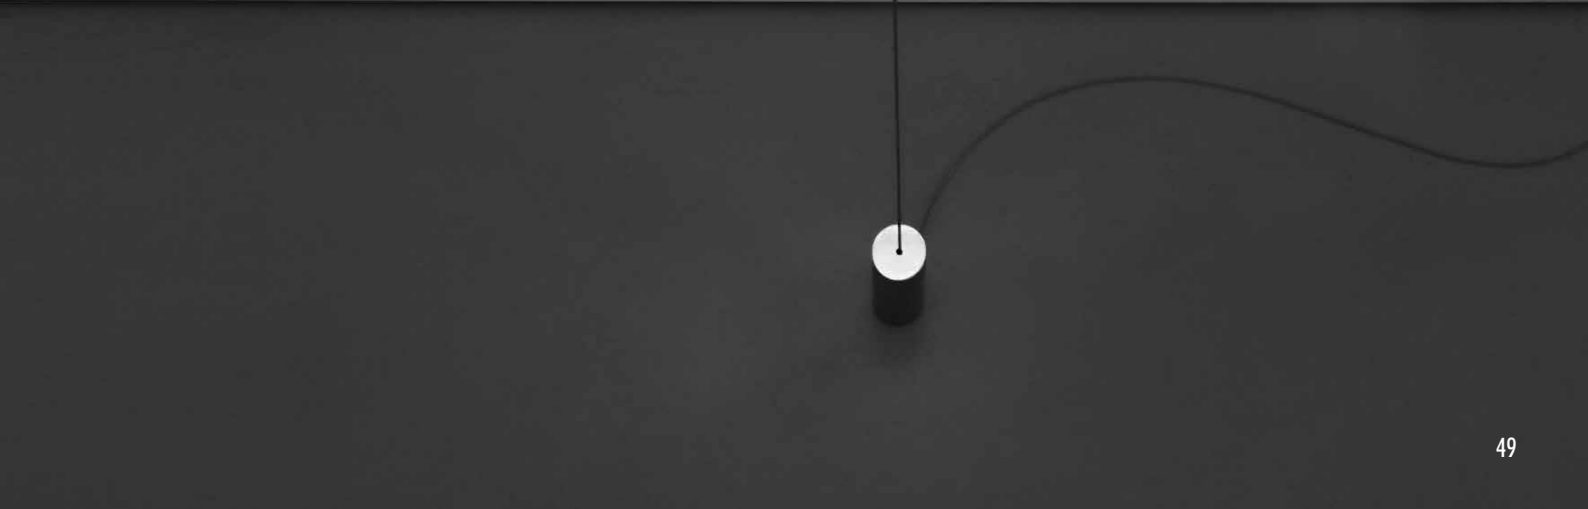

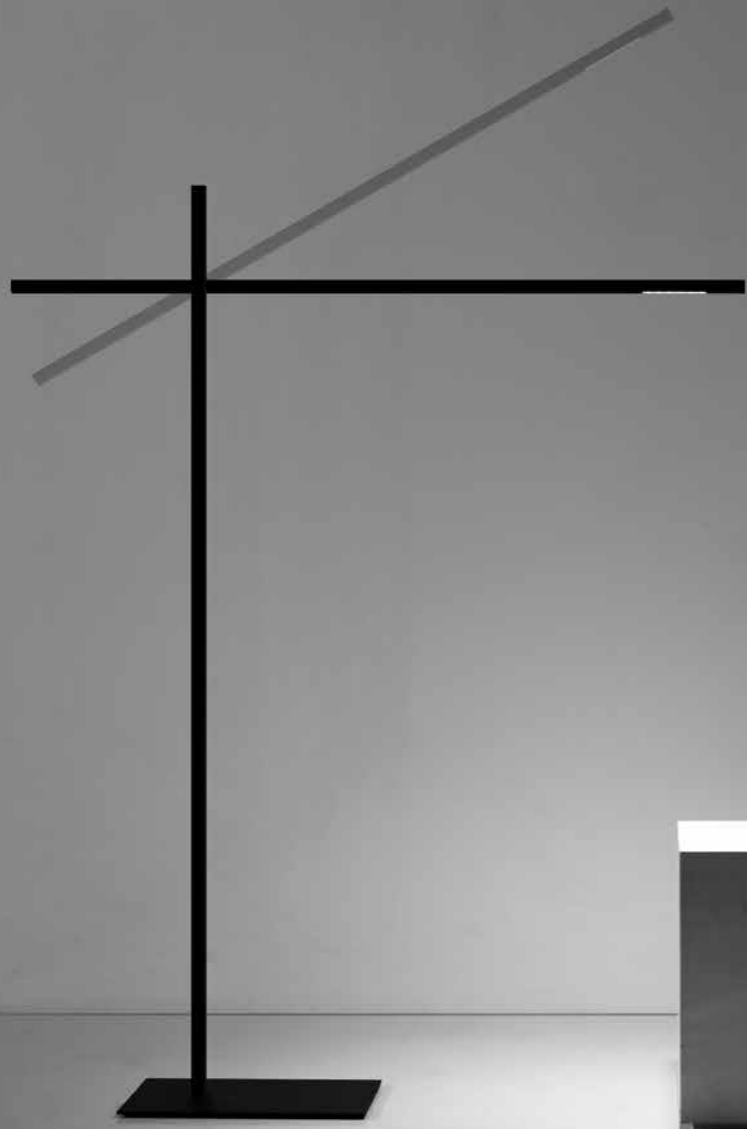




DRIVER

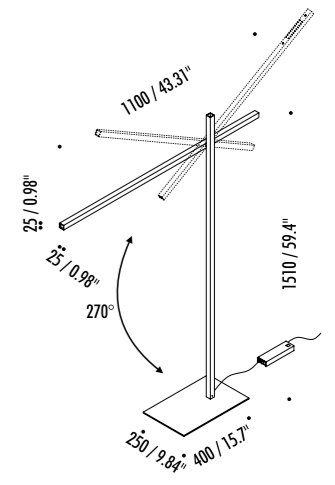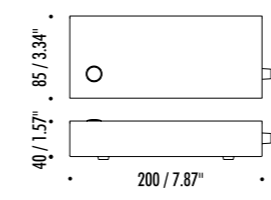



19030403	MATT BLACK - 3000K	120 V - 60 Hz - 15 W LED - 823 lm - CRI > 90 BLACK CABLE - ADJUSTABLE - DIMMER
19030403-27	MATT BLACK - 2700K	
19030803	BRUSHED BRASS - 3000K	
19030803-27	BRUSHED BRASS - 2700K	




DRIVER

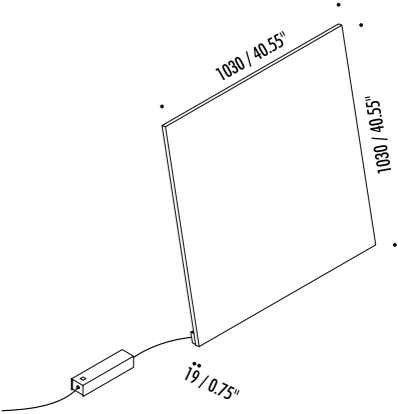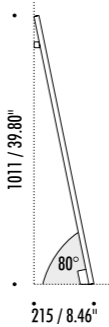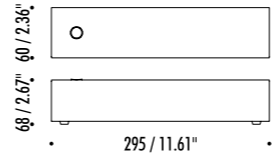


18180003	STANDARD	120 V - 60 Hz - 30 W LED - RGB WIRELESS CONTROL POWER SUPPLY WITH PLUG - TRANSPARENT CABLE

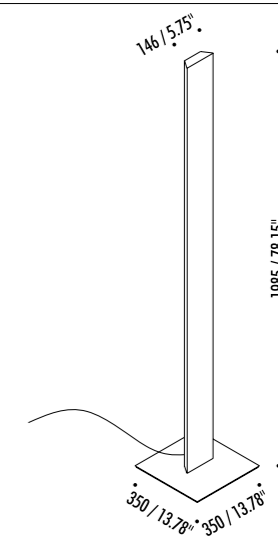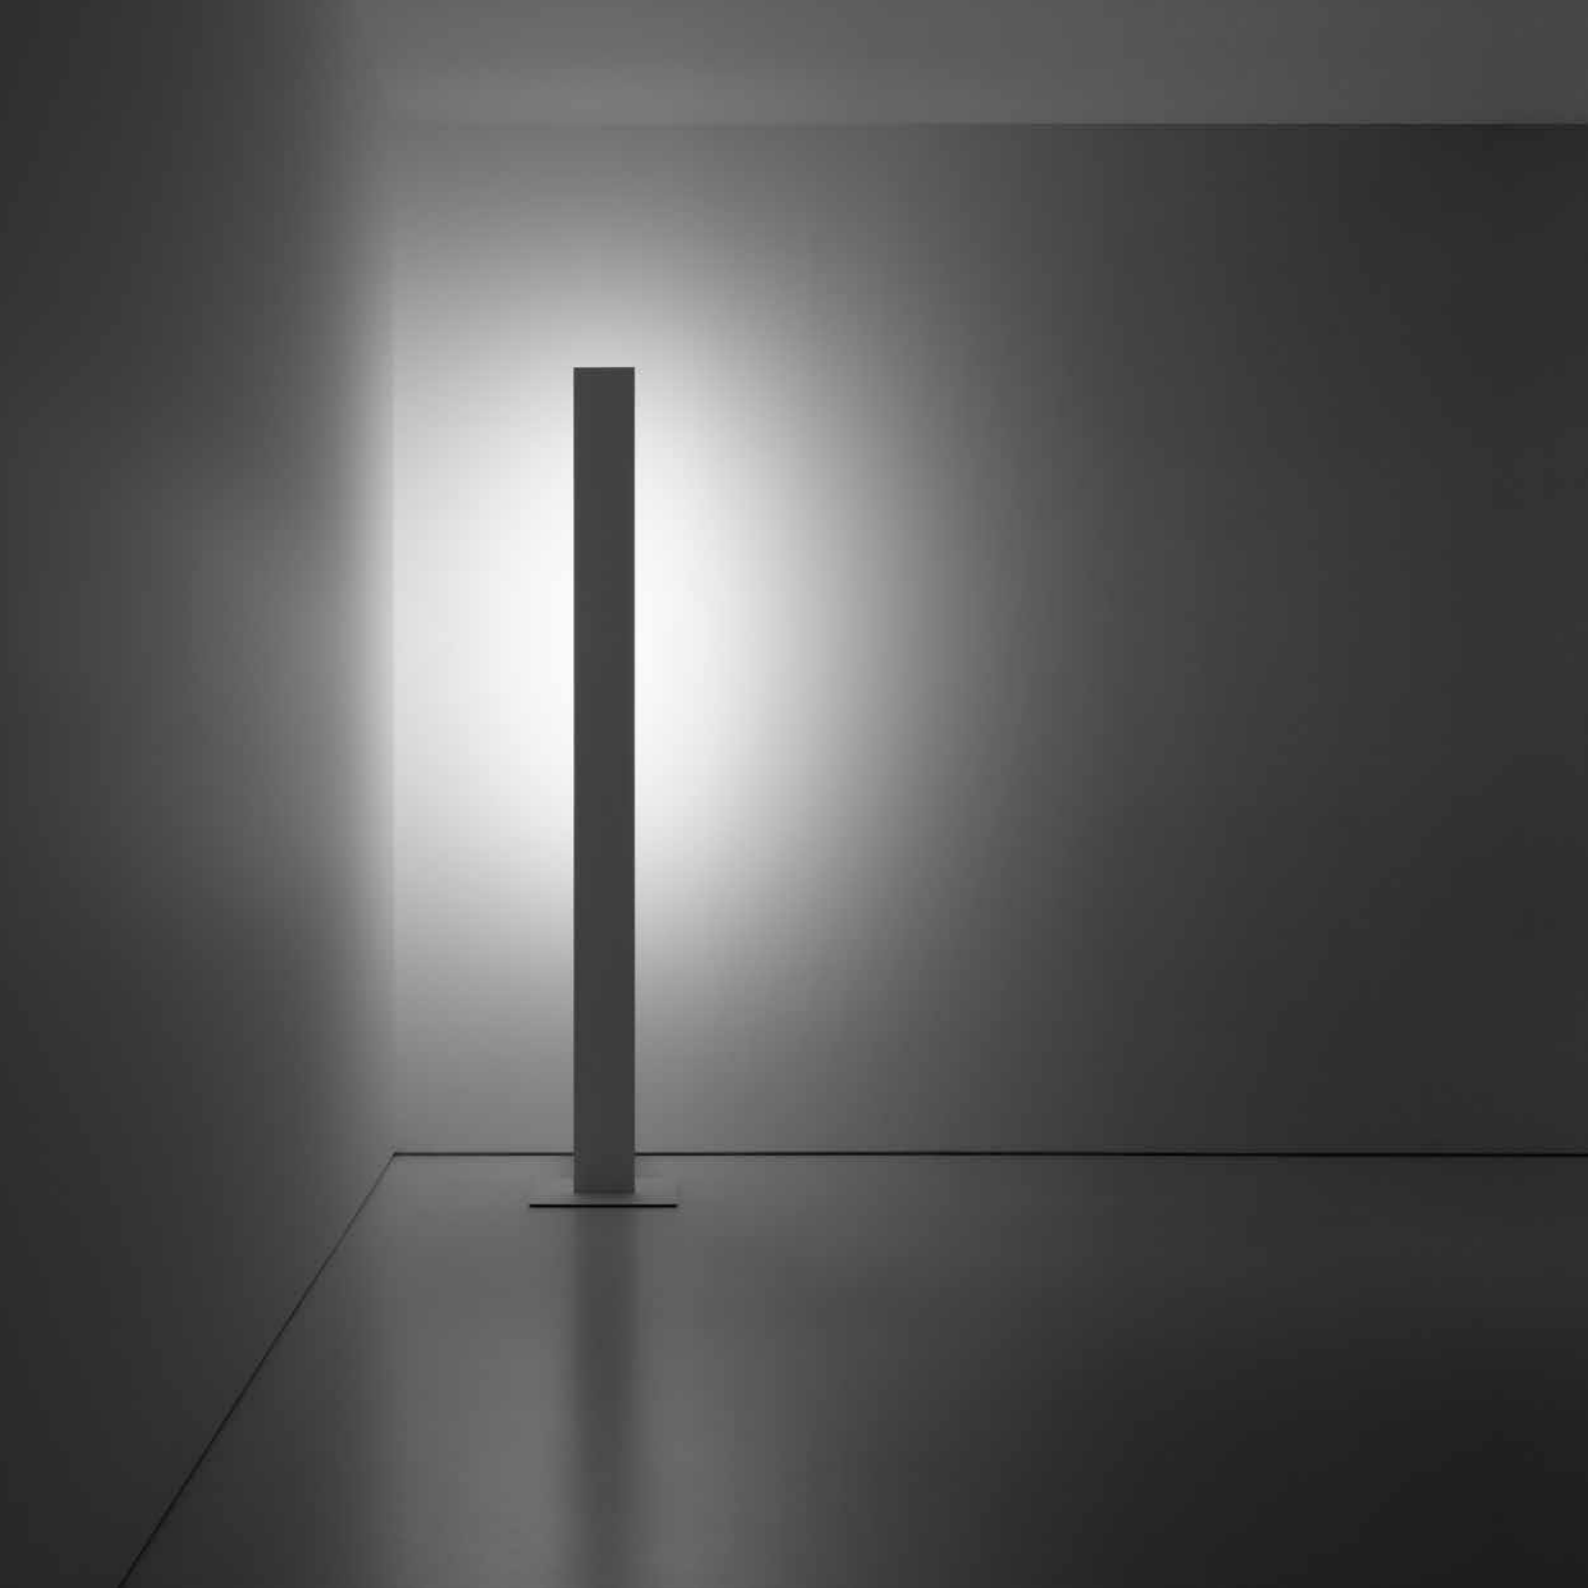


17720303	MATT WHITE	120 V - 60 Hz - 80 W LED - 2700K - 2832 lm - CRI > 90 RGBW WIRELESS CONTROL BLACK CABLE
17721303	BLACK BRUSHED STAINLESS STEEL	

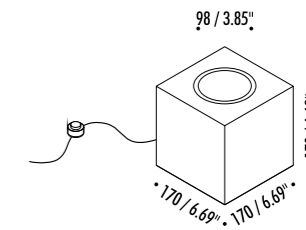

18920003	STANDARD	120 V - 60 Hz - MAX 10 W LED - GU10 BLACK CABLE - BULB NOT INCLUDED

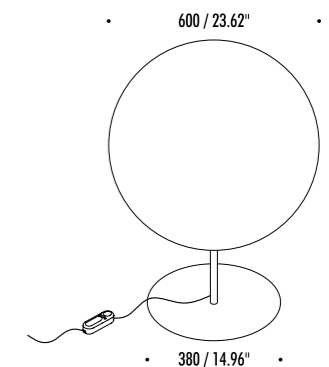


14820003	STANDARD	120 V - 60 Hz - MAX 40 W - E26 WHITE CABLE - WHITE BASE - DIMMER - LED BULB NOT INCLUDED


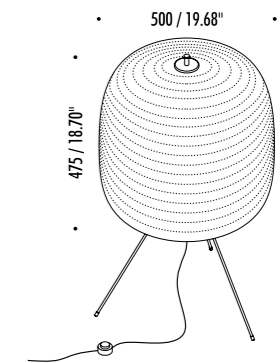


18850003	STANDARD	120 V - 60 Hz - MAX 18 W LED - E26 BLACK CABLE - BULB NOT INCLUDED

SUSPENSION

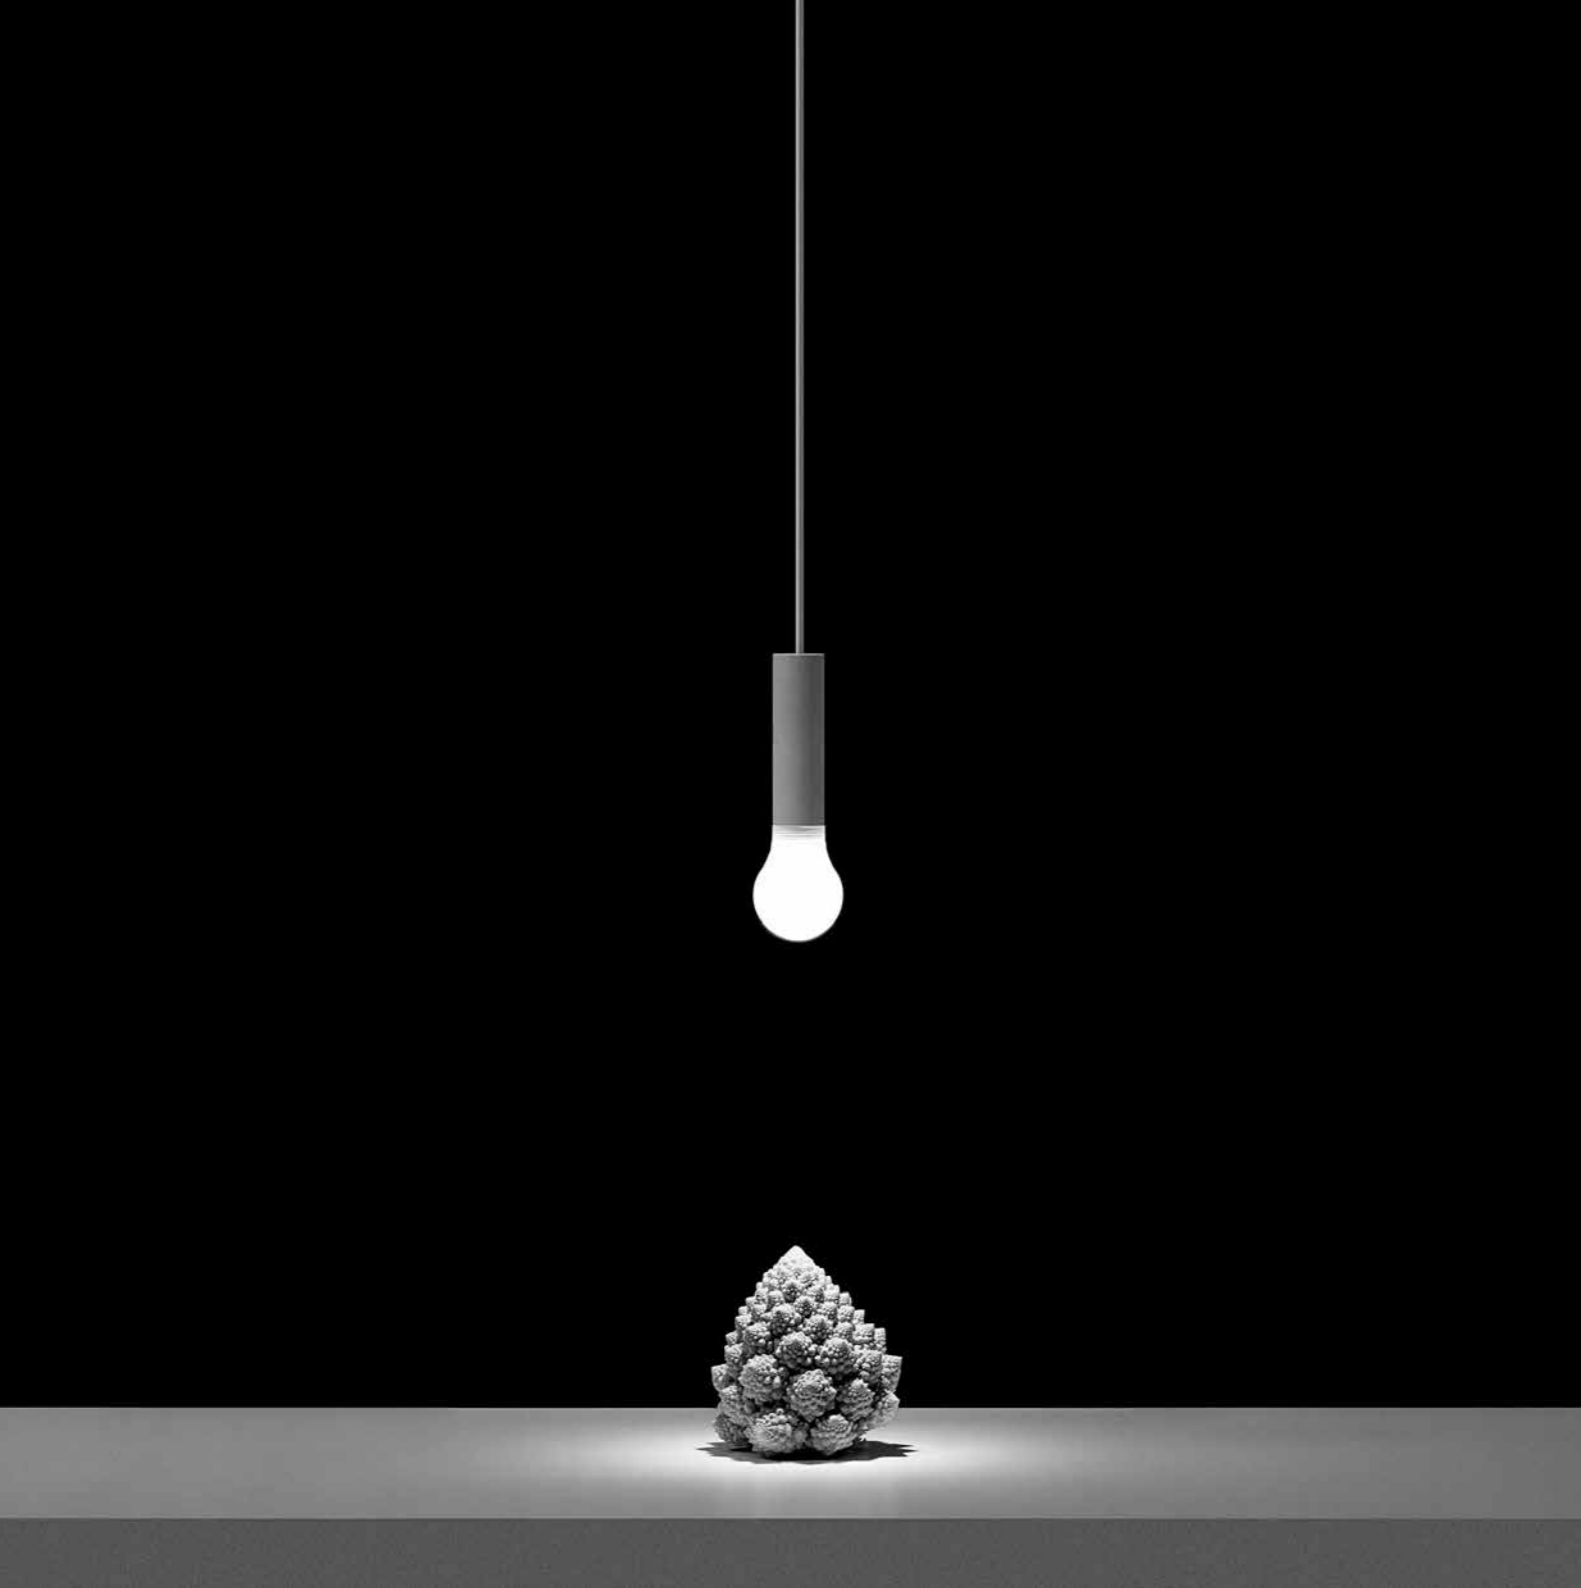



CEILING ROSE

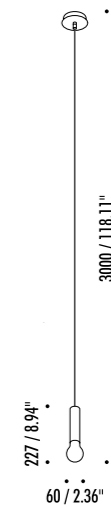

17610303	MATT WHITE	120 V - 60 Hz - 5,5 W LED - 3000K - 354 lm - CRI > 90 WHITE CABLE - WHITE CEILING ROSE - NOT DIMMABLE



CLAMP

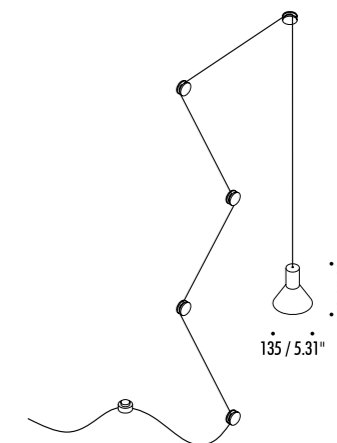


17130303	MATT WHITE	120 V - 60 Hz - MAX 10 W LED - GU10 POWER SUPPLY WITH PLUG - WHITE CABLE 10 m INCLUDES SWITCH THAT MUST BE WIRED FIVE CLAMPS INCLUDED - BULB NOT INCLUDED
17130403	MATT BLACK	120 V - 60 Hz - MAX 10 W LED - GU10 POWER SUPPLY WITH PLUG - BLACK CABLE 10 m INCLUDES SWITCH THAT MUST BE WIRED FIVE CLAMPS INCLUDED - BULB NOT INCLUDED

OPTIONAL ACCESSORIES


17470303	MATT WHITE	WALL AND CEILING ROSE
17470403	MATT BLACK	
17270303	MATT WHITE	CLAMP
17270403	MATT BLACK	



POWER SUPPLY WITH PLUG INSTALLATION

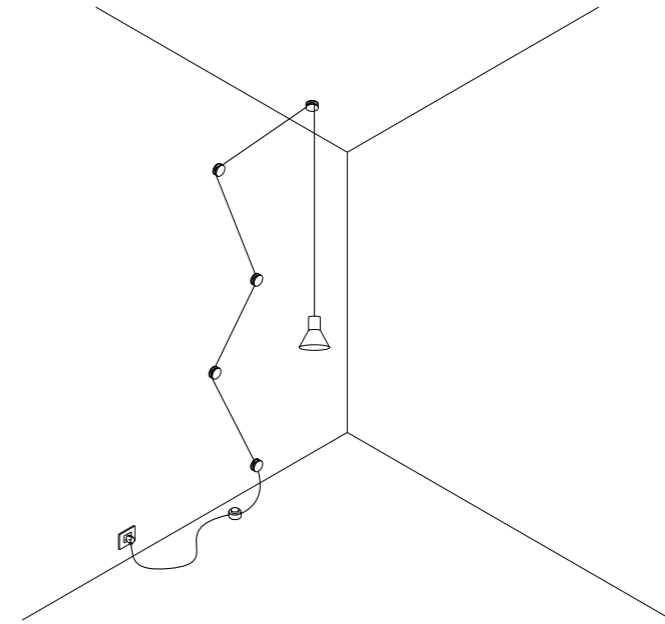


WALL AND CEILING ROSE INSTALLATION


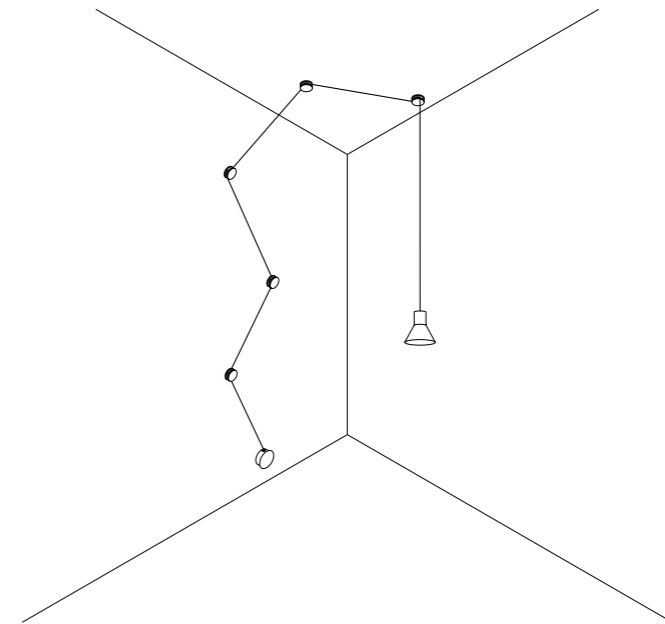




CEILING ROSE




BASE

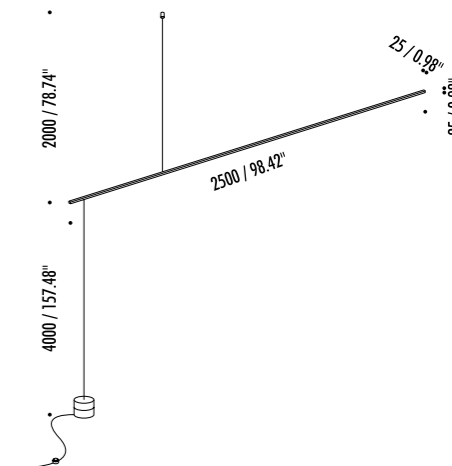


17540403	MATT BLACK - 3000K	120 V - 60 Hz - 15 W LED - 560 lm - CRI > 90 POWER SUPPLY WITH PLUG - TRANSPARENT CABLE DUAL EMISSION - NOT DIMMABLE OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101
17540403-27	MATT BLACK - 2700K	



CEILING ROSE




40 / 1.57" . 135 / 5.31"

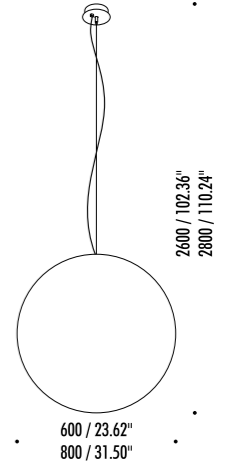


2600 / 102.36" . 2800 / 110.24"

600 / 23.62" . 800 / 31.50"


15150003	STANDARD	MOON 60 120 V - 60 Hz - MAX 25 W LED - E26 WHITE CABLE - WHITE CEILING ROSE - BULB NOT INCLUDED OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101
13720003	STANDARD	MOON 80 120 V - 60 Hz - MAX 25 W LED - E26 WHITE CABLE - WHITE CEILING ROSE - BULB NOT INCLUDED OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101

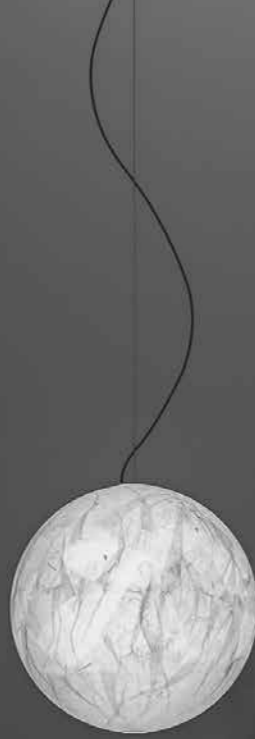

CEILING ROSE



40 / 1.57 . 135 / 5.31"

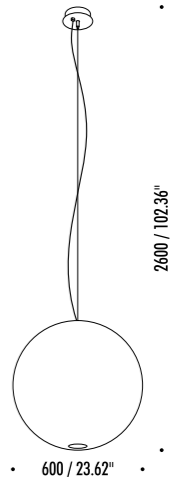



2600 / 102.36"

600 / 23.62"

16570003	STANDARD	120 V - 60 Hz - MAX 25 W LED - E26 + MAX 10 W LED - GU10 TRANSPARENT CABLE - WHITE CEILING ROSE DUAL EMISSION - BULBS NOT INCLUDED OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101





CEILING ROSE

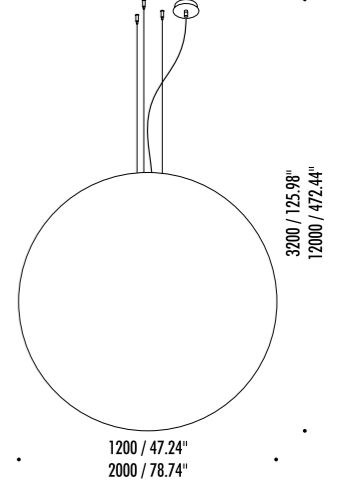

19860003	STANDARD	MOON 120 120 V - 60 Hz - MAX 2 x 25 W LED - E26 WHITE CABLE - WHITE CEILING ROSE - BULBS NOT INCLUDED OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101
18780003	STANDARD	MOON 200 120 V - 60 Hz - MAX 4 x 25 W LED - E26 WHITE CABLE - WHITE CEILING ROSE - BULBS NOT INCLUDED




CEILING ROSE

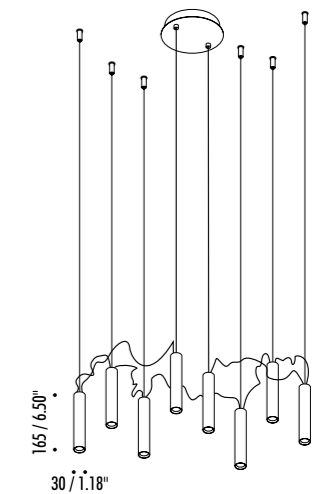

18040303	MATT WHITE - 3000K	120 V - 60 Hz - 18,5 W LED - 960 lm - CRI > 90
18040303-27	MATT WHITE - 2700K	WHITE CEILING ROSE - 1-10 V - PUSH DIMMABLE
		RED WIRES FOR LED MODULES CONNECTION
		OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101
18042603	MATT TOTAL BLACK - 3000K	120 V - 60 Hz - 18,5 W LED - 960 lm - CRI > 90
18042603-27	MATT TOTAL BLACK - 2700K	BLACK CEILING ROSE - PUSH - 1-10 V DIMMABLE
		ANTHRACITE GRAY WIRES FOR LED MODULES CONNECTION
		OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101

CEILING ROSE





16100303	MATT WHITE - 3000K	120 V - 60 Hz - 5,5 W LED - 312 lm - CRI>90 WHITE CABLE - WHITE CEILING ROSE - NOT DIMMABLE
16100303-27	MATT WHITE - 2700K	
16100403	MATT BLACK - 3000K	
16100403-27	MATT BLACK - 2700K	
16100803	BRUSHED BRASS - 3000K	120 V - 60 Hz - 5,5 W LED - 312 lm - CRI>90 BLACK CABLE - BLACK CEILING ROSE - NOT DIMMABLE
16100803-27	BRUSHED BRASS - 2700K	
16102603	MATT TOTAL BLACK - 3000K	
16102603-27	MATT TOTAL BLACK - 2700K	





CEILING ROSE

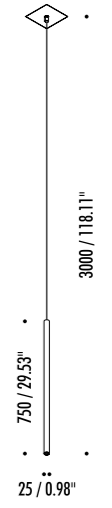


16110303	MATT WHITE - 3000K	MAX 350 mA DC - 4 W LED - 312 lm - CRI > 90 WHITE CABLE - WHITE CEILING ROSE
16110303-27	MATT WHITE - 2700K	INSTALLATION ON PLASTERBOARD WITH FLAT ROSE AND MAGNETIC FIXING COMPULSORY INSTALLATION KIT INCLUDED
16110403	MATT BLACK - 3000K	PLASTERBOARD CUT-OUT 85 x 97 mm - MINIMUM SPACE FOR MOUNTING 120 mm INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - NOT DIMMABLE
16110403-27	MATT BLACK - 2700K	
16110803	BRUSHED BRASS - 3000K	MAX 350 mA DC - 4 W LED - 312 lm - CRI > 90 BLACK CABLE - BLACK CEILING ROSE
16110803-27	BRUSHED BRASS - 2700K	INSTALLATION ON PLASTERBOARD WITH FLAT ROSE AND MAGNETIC FIXING COMPULSORY INSTALLATION KIT INCLUDED
		PLASTERBOARD CUT-OUT 85 x 97 mm - MINIMUM SPACE FOR MOUNTING 120 mm INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - NOT DIMMABLE






CEILING ROSE



18150303	MATT WHITE - 3000K	120 V - 60 Hz - 5,5 W LED - 286 lm - CRI > 90
18150303-27	MATT WHITE - 2700K	WHITE CABLE - WHITE CEILING ROSE - NOT DIMMABLE
18150803	BRUSHED BRASS - 3000K	120 V - 60 Hz - 5,5 W LED - 286 lm - CRI > 90
18150803-27	BRUSHED BRASS - 2700K	BLACK CABLE - BLACK CEILING ROSE - NOT DIMMABLE




CEILING ROSE



15680303	MATT WHITE	120 V - 60 Hz - MAX 20 W 12 V - GU4 WHITE CABLE - WHITE CEILING ROSE - LED BULB INCLUDED
		3,5 W LED - 2700K - 210 lm - CRI 80 - EFFICIENCY A+




CEILING ROSE





15670303	MATT WHITE	120 V - 60 Hz - MAX 20 W 12 V - GU4 WHITE CABLE - WHITE CEILING ROSE - LED BULB INCLUDED
		3,5 W LED - 2700K - 210 lm - CRI 80 - EFFICIENCY A+



CEILING ROSE






SHADE

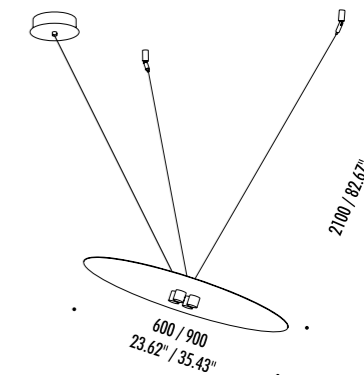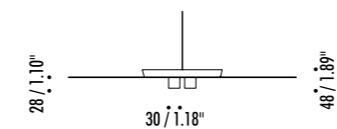

19560003	STANDARD Ø 600	CARTESIO 120 V - 60 Hz - 15,5 W LED (DOWN) - 3000K - 300 lm - CRI > 80 LED (UP) - 3000K - 930 lm - CRI > 90 STAINLESS STEEL MIRROR REFLECTOR - WHITE CEILING ROSE - WHITE CABLE DUAL EMISSION - 1-10 V - PUSH DIMMABLE
----------	----------------	---

1A0070003	STANDARD Ø 900	CARTESIO 90 120 V - 60 Hz - 15,5 W LED (DOWN) - 3000K - 300 lm - CRI > 80 LED (UP) - 3000K - 930 lm - CRI > 90 STAINLESS STEEL MIRROR REFLECTOR - WHITE CEILING ROSE - WHITE CABLE DUAL EMISSION - 1-10 V - PUSH DIMMABLE
-----------	----------------	--

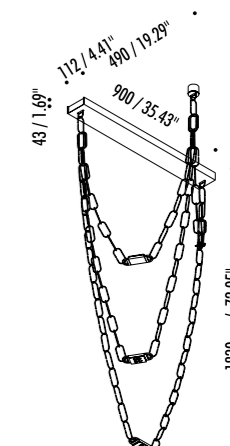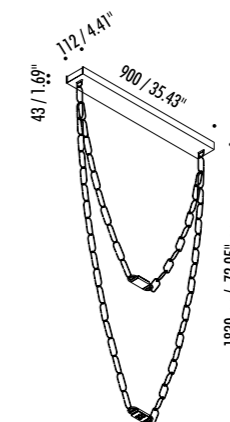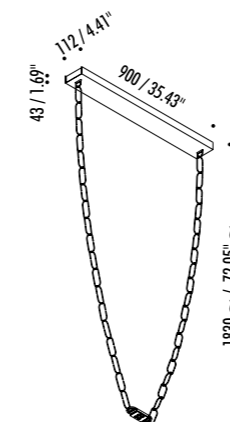


19880003	STANDARD - 3000K	ChainDelier 1-1 120 V - 60 Hz - 1 x 5 W LED - 406 lm / 2700K - 370 lm - CRI > 90
19880003-27	STANDARD - 2700K	40 GOLD FINISH LINKS - BIG GOLD FINISH CEILING ROSE
		0-10 V DIMMABLE
		OPTIONAL ACCESSORIES - SEE PAG 97

19900003	STANDARD - 3000K	ChainDelier 1-2 120 V - 60 Hz - 2 x 5 W LED - 2 x 406 lm / 2700K - 2 x 370 lm - CRI > 90
19900003-27	STANDARD - 2700K	60 GOLD FINISH LINKS - BIG GOLD FINISH CEILING ROSE
		0-10 V DIMMABLE
		OPTIONAL ACCESSORIES - SEE PAG 97

19920003	STANDARD - 3000K	ChainDelier 1-3 120 V - 60 Hz - 3 x 5 W LED - 3 x 406 lm / 2700K - 3 x 370 lm - CRI > 90
19920003-27	STANDARD - 2700K	100 GOLD FINISH LINKS - BIG GOLD FINISH CEILING ROSE - SMALL GOLD FINISH CEILING ROSE
		0-10 V DIMMABLE
		OPTIONAL ACCESSORIES - SEE PAG 97






SUGGESTED MEASURES


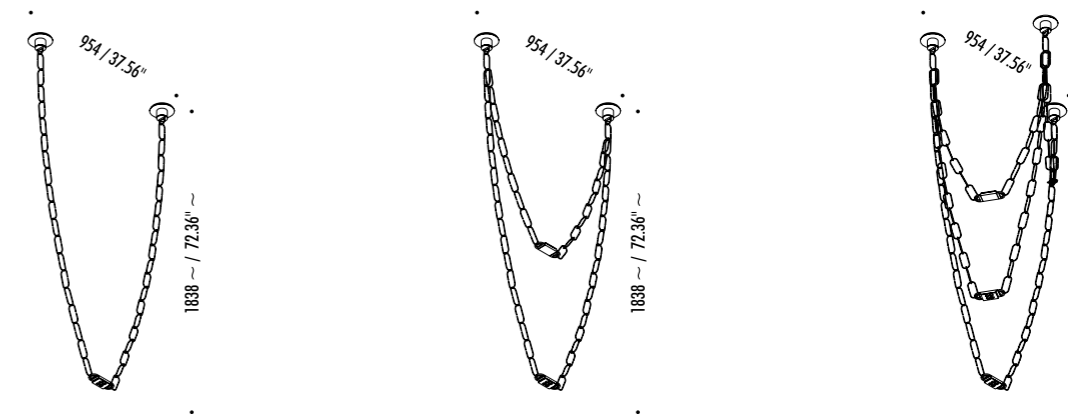


19870003	STANDARD - 3000K	ChainDelier 2-1 24 V DC - 1 x 5 W LED - 406 lm / 2700K - 370 lm - CRI > 90 40 GOLD FINISH LINKS - 2 GOLD FINISH CEILING ROSE - COMPULSORY INSTALLATION KIT INCLUDED INCLUDES LED DRIVER INPUT 120 V - 60 Hz - 0-10 V DIMMABLE OPTIONAL ACCESSORIES - SEE PAG 97
19870003-27	STANDARD - 2700K	
19890003	STANDARD - 3000K	ChainDelier 2-2 24 V DC - 2 x 5 W LED - 2 x 406 lm / 2700K - 2 x 370 lm - CRI > 90 60 GOLD FINISH LINKS - 2 GOLD FINISH CEILING ROSE - COMPULSORY INSTALLATION KIT INCLUDED INCLUDES LED DRIVER INPUT 120 V - 60 Hz - 0-10 V DIMMABLE OPTIONAL ACCESSORIES - SEE PAG 97
19890003-27	STANDARD - 2700K	
19910003	STANDARD - 3000K	ChainDelier 2-3 24 V DC - 3 x 5 W LED - 3 x 406 lm / 2700K - 3 x 370 lm - CRI > 90 100 GOLD FINISH LINKS - 3 GOLD FINISH CEILING ROSE - COMPULSORY INSTALLATION KIT INCLUDED INCLUDES LED DRIVER INPUT 120 V - 60 Hz - 0-10 V DIMMABLE OPTIONAL ACCESSORIES - SEE PAG 97
19910003-27	STANDARD - 2700K	

ChainDelier 1

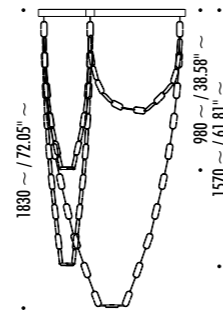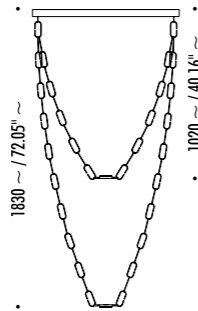

ChainDelier 2

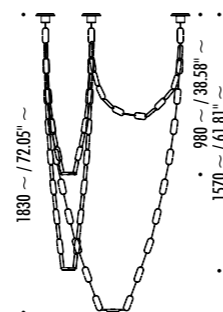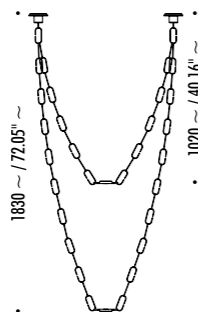



OPTIONAL ACCESSORIES

1A0380003	STANDARD - 3000K	24 V DC - 5 W LED - 406 lm / 2700K - 370 lm - CRI > 90 LED MODULE - MAX 5 MODULES FOR DRIVER	
1A0380003-27	STANDARD - 2700K		


1A0730003	STANDARD	10 GOLD FINISH LINKS	

1A0390003	STANDARD (+ POSITIVE)	GOLD FINISH CEILING ROSE	
1A0400003	STANDARD (- NEGATIVE)		





CEILING ROSE

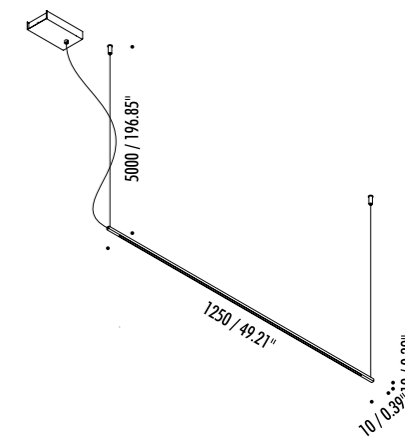


17120303	MATT WHITE - 3000K	120 V - 60 Hz - 15,5 W LED - 619 lm - CRI > 90 COAXIAL CABLE - WHITE CEILING ROSE 1-10 V - PUSH DIMMABLE OPTIONAL ACCESSORIES SUSPENSION KIT - SEE PAGE 101
17120303-27	MATT WHITE - 2700K	
17120803	BRUSHED BRASS - 3000K	
17120803-27	BRUSHED BRASS - 2700K	

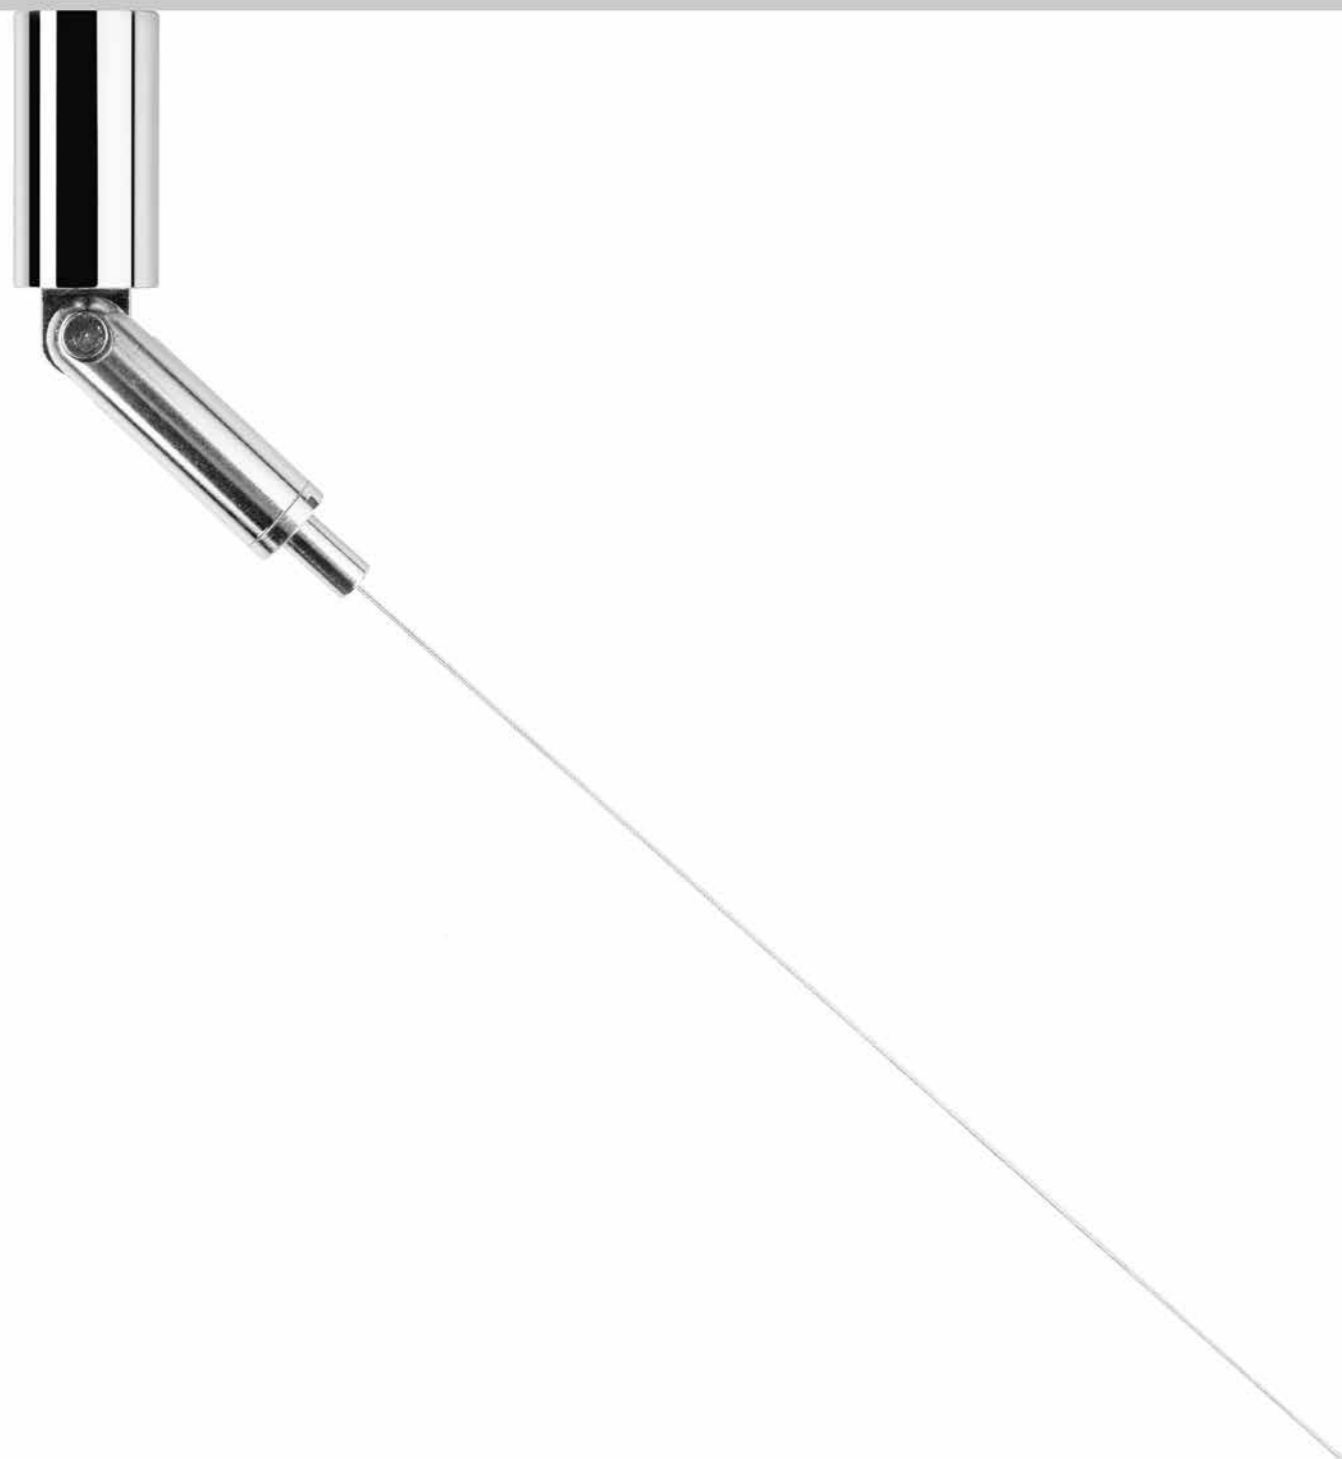


OPTIONAL ACCESSORIES

1A0510003	STANDARD	SLOPED CEILING FIXING KIT	
		COMPATIBLE LAMPS: QuiQuoQua - MASAI - FOSBURY - MOON 120	
1A0520003	STANDARD	SLOPED ROSE FIXING KIT	
		COMPATIBLE LAMPS: MOON 60 - MOON 60 DE - MOON 80	
1A0530003	STANDARD	SLOPED CEILING FIXING HOOK	
		COMPATIBLE LAMPS: MERIDIANA - SIMBIOSI - SHANGHAI	
17270303	MATT WHITE	CLAMP	
17270403	MATT BLACK		


1A0510003 - SLOPED CEILING FIXING KIT

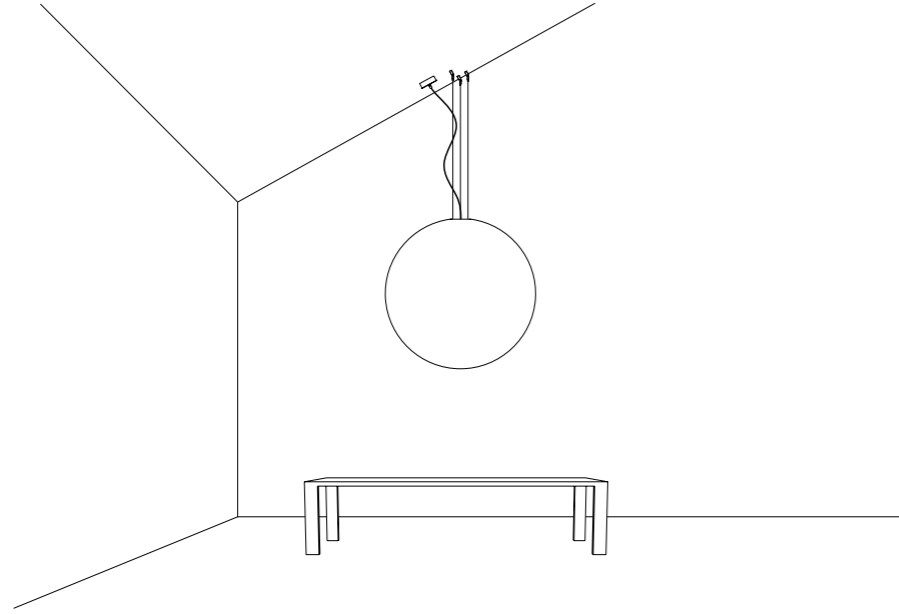



1A0530003 - SLOPED CEILING FIXING HOOK

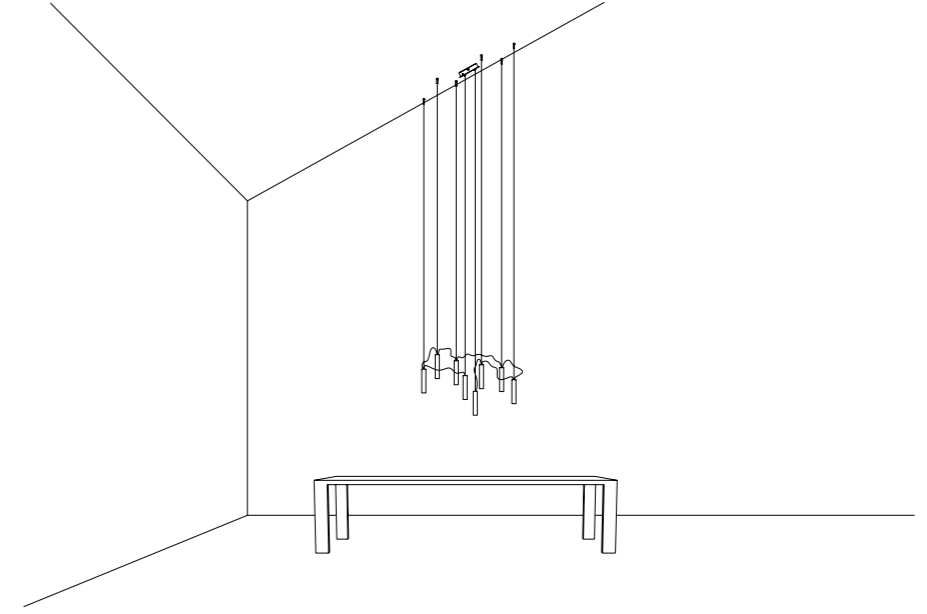

1A0520003 - SLOPED ROSE FIXING KIT


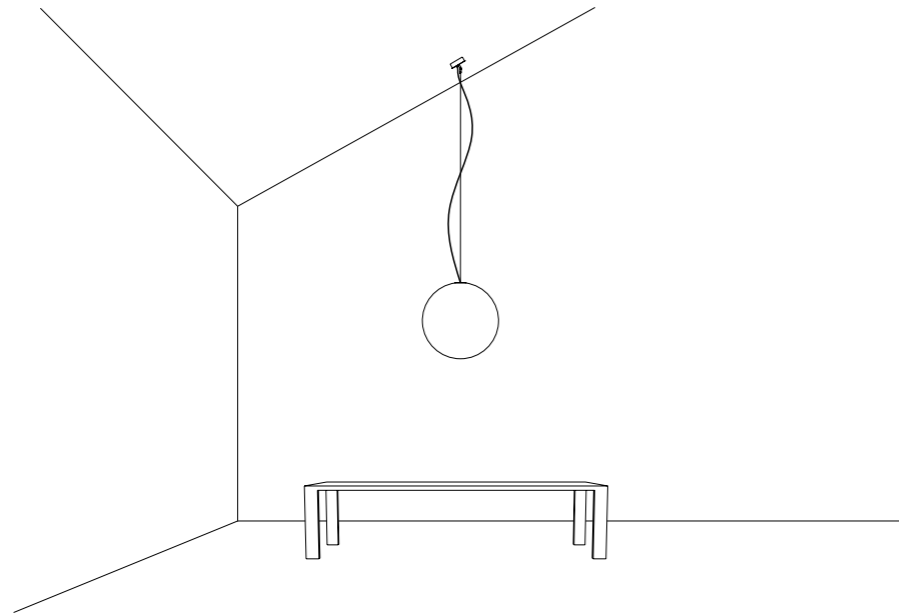


WALL

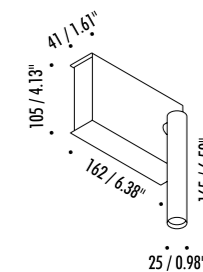



18810303	MATT WHITE - 3000K	120 V - 60 Hz - 7,5 W LED - 352 lm - CRI > 90 ADJUSTABLE - 1-10 V - PUSH DIMMABLE
18810303-27	MATT WHITE - 2700K	
18810403	MATT BLACK - 3000K	
18810403-27	MATT BLACK - 2700K	


18980303	MATT WHITE - 3000K	120 V - 60 Hz - 7,5 W LED - 352 lm - CRI > 90 ADJUSTABLE - DALI DIMMABLE
18980303-27	MATT WHITE - 2700K	
18980403	MATT BLACK - 3000K	
18980403-27	MATT BLACK - 2700K	

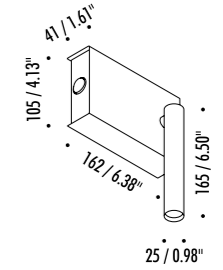



18240303	MATT WHITE - 3000K	120 V - 60 Hz - 7,5 W LED - 352 lm - CRI > 90 ADJUSTABLE - NOT DIMMABLE
18240303-27	MATT WHITE - 2700K	
18240403	MATT BLACK - 3000K	
18240403-27	MATT BLACK - 2700K	

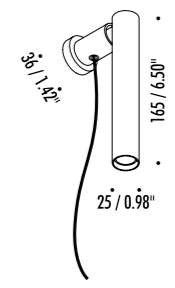



18160303	MATT WHITE - 3000K	MAX 500 mA DC - MAX 5,6 W LED - 352 lm - CRI > 90
18160303-27	MATT WHITE - 2700K	MAGNETIC FIXING - WHITE CABLE 3 m
		ADJUSTABLE
		INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - NOT DIMMABLE
18160403	MATT BLACK - 3000K	MAX 500 mA DC - MAX 5,6 W LED - 352 lm - CRI > 90
18160403-27	MATT BLACK - 2700K	MAGNETIC FIXING - BLACK CABLE 3 m
		ADJUSTABLE
		INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - NOT DIMMABLE

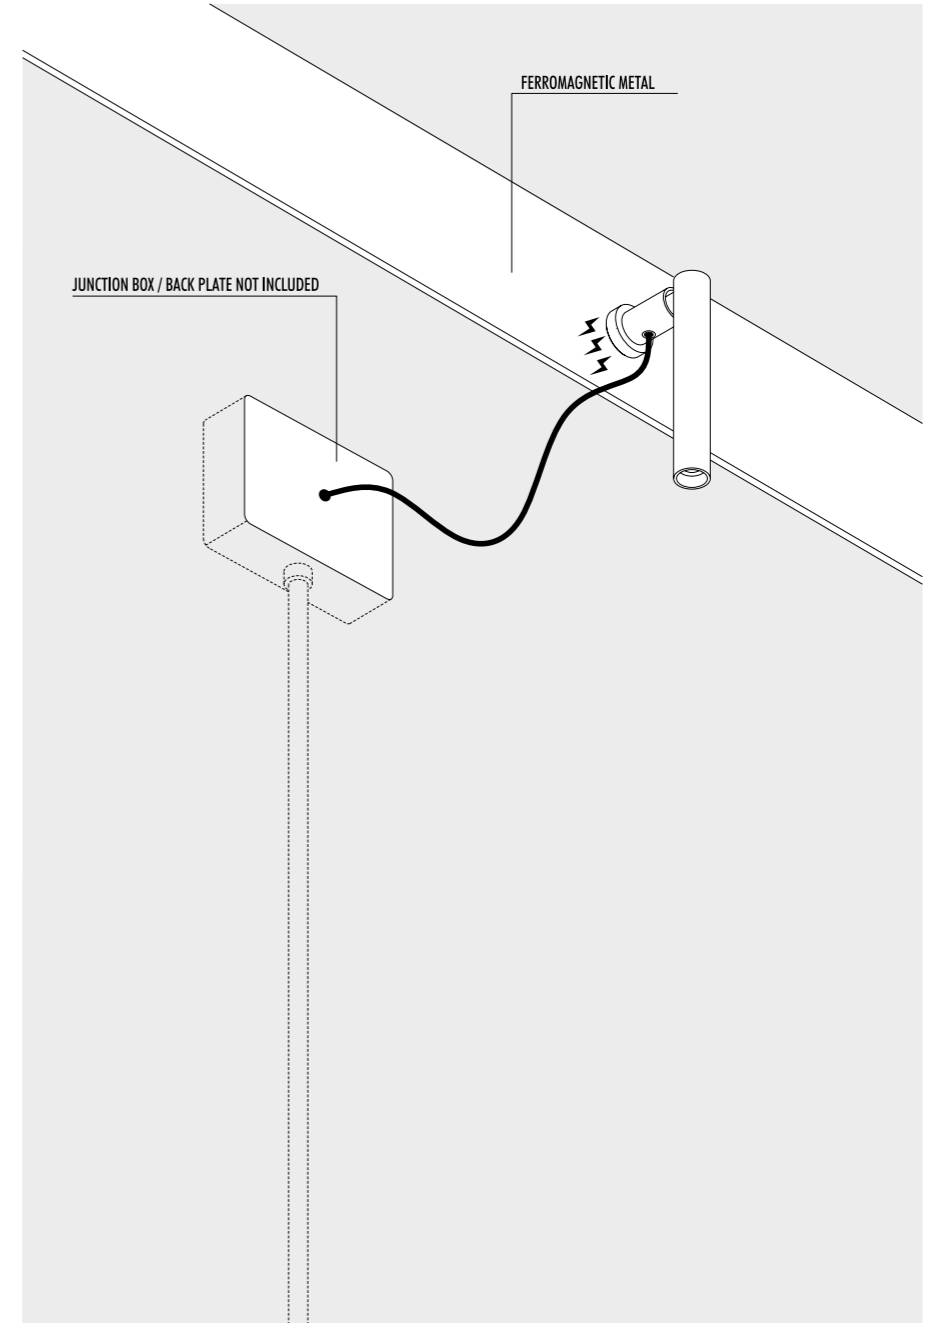

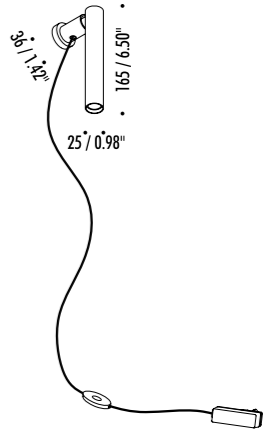



19550303	MATT WHITE - 3000K	24 V DC - 5,6 W LED - 352 lm - CRI > 90 POWER SUPPLY WITH PLUG
19550303-27	MATT WHITE - 2700K	MAGNETIC FIXING - WHITE CABLE 5 m ADJUSTABLE - DIMMER INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz
19550403	MATT BLACK - 3000K	24 V DC - 5,6 W LED - 352 lm - CRI > 90 POWER SUPPLY WITH PLUG
19550403-27	MATT BLACK - 2700K	MAGNETIC FIXING - BLACK CABLE 5 m ADJUSTABLE - DIMMER INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz





17840303	MATT WHITE	120 V - 60 Hz - MAX 10 W LED - GU10 ADJUSTABLE - WHITE WALL BACK PLATE BULB NOT INCLUDED
17840403	MATT BLACK	




1A05003	MATT WHITE	120 V - 60 Hz - MAX 15 W LED ADJUSTABLE - PUSH - 1-10 V DIMMABLE LED MODULE NOT INCLUDED

COMPULSORY ACCESSORIES

50041500	LED MODULE 15° SPOT	MAX 15 W LED - 15° - 3000K - 1456 lm - CRI 90 - DIMMABLE
50041510	LED MODULE 15° SPOT	MAX 15 W LED - 15° - 2700K - 1350 lm - CRI 90 - DIMMABLE
50041350	LED MODULE 24° SPOT	MAX 15 W LED - 24° - 3000K - 1584 lm - CRI 90 - DIMMABLE
50041450	LED MODULE 24° SPOT	MAX 15 W LED - 24° - 2700K - 1480 lm - CRI 90 - DIMMABLE

OPTIONAL ACCESSORIES

1A1210003	STANDARD	DARKLIGHT
-----------	----------	-----------

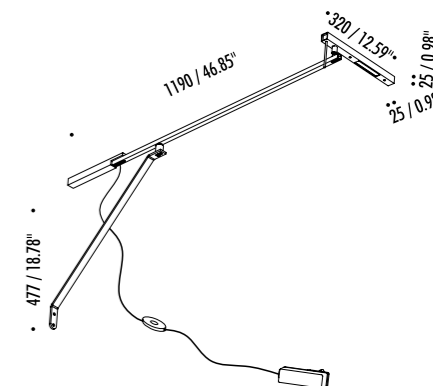


19760403	MATT BLACK	24 V DC - 13 W LED - 3000K - 823 lm - CRI > 90 BLACK CABLE ADJUSTABLE - DIMMER INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz



DESIGN DAVIDE GROPPI - ALBERTO ZATTIN - 2011
WALL LAMP - METAL - GLASS



TOAST LED




16500103-27	POLISHED CHROME - 2700K	120 V - 60 Hz - 12 W LED - 743 lm - CRI > 80 WHITE WALL BACK PLATE - NOT DIMMABLE
16500303-27	MATT WHITE - 2700K	
16500403-27	MATT BLACK - 2700K	
16500803-27	BRUSHED BRASS - 2700K	
16501403-27	BRUSHED CHROME - 2700K	




DESIGN DAVIDE GROPPI - ALBERTO ZATTIN - 2001
WALL LAMP - METAL - GLASS



TOAST



10460103	POLISHED CHROME	120 V - 60 Hz - MAX 100 W - R7s WHITE WALL BACK PLATE COMPULSORY BULB NOT INCLUDED
10460303	MATT WHITE	
10460403	MATT BLACK	
10460803	BRUSHED BRASS	
10461403	BRUSHED CHROME	







DESIGN OMAR CARRAGLIA - DAVIDE GROPPI - 2003
WALL LAMP - METAL


CERTIFICATED 1659XX03B PRODUCT 

SOL 1

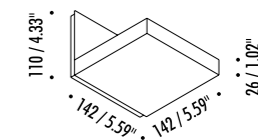



16590303	MATT WHITE - 3000K	
16590303-27	MATT WHITE - 2700K	
16590403	MATT BLACK - 3000K	
16590403-27	MATT BLACK - 2700K	

SOL 1 LED
120 V - 60 Hz - 18 W LED - 1305 lm - CRI > 80
WHITE WALL BACK PLATE - TRIAC DIMMABLE


13400303	MATT WHITE	
13400403	MATT BLACK	


SOL 1
120 V - 60 Hz - MAX 150 W - R7s
WHITE WALL BACK PLATE
COMPULSORY BULB NOT INCLUDED

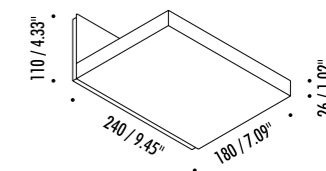


16600303	MATT WHITE - 3000K	SOL 2 LED 120 V - 60 Hz - 27 W LED - 1959 lm - CRI > 80 WHITE WALL BACK PLATE - TRIAC DIMMABLE 
16600303-27	MATT WHITE - 2700K	
16600403	MATT BLACK - 3000K	
16600403-27	MATT BLACK - 2700K	

14710303	MATT WHITE	SOL 2 120 V - 60 Hz - MAX 200 W - R7s WHITE WALL BACK PLATE COMPULSORY LED BULB NOT INCLUDED
14710403	MATT BLACK	

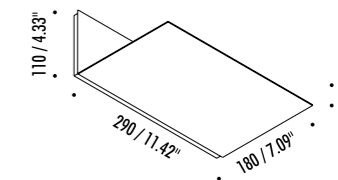

16610303	MATT WHITE - 3000K	FOIL LED 120 V - 60 Hz - 27 W LED - 1959 lm - CRI > 80 WHITE WALL BACK PLATE - TRIAC DIMMABLE 
16610303-27	MATT WHITE - 2700K	
16610403	MATT BLACK - 3000K	
16610403-27	MATT BLACK - 2700K	

15170303	MATT WHITE	FOIL 120 V - 60 Hz - MAX 200 W - R7s WHITE WALL BACK PLATE COMPULSORY LED BULB NOT INCLUDED
15170403	MATT BLACK	

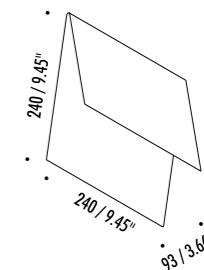


17160303	MATT WHITE - 3000K	120 V - 60 Hz - 20 W LED - 416 lm - CRI > 80 DALI - 1-10 V - PUSH DIMMABLE
17160303-27	MATT WHITE - 2700K	



DESIGN DAVIDE GROPPI - 2007
WALL LAMP - METAL

PIÙ

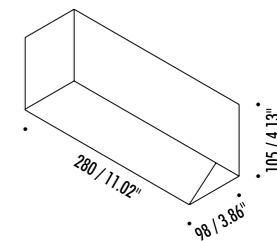


14520303	MATT WHITE	120 V - 60 Hz - MAX 120 W - R7s COMPULSORY LED BULB NOT INCLUDED




DESIGN DAVIDE GROPPI - 1999
WALL LAMP - METAL



OZEN

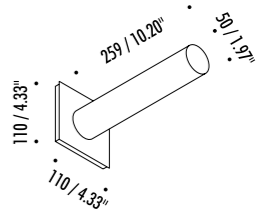



10360103	POLISHED CHROME	120 V - 60 Hz - MAX 60 W - G9 WHITE WALL BACK PLATE - BULB NOT INCLUDED
10360303	MATT WHITE	

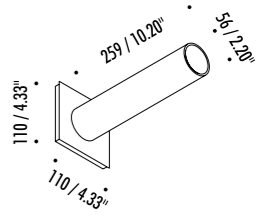


10410003	STANDARD	120 V - 60 Hz - MAX 48 W - G9 WHITE WALL BACK PLATE - BULB NOT INCLUDED





DRIVER

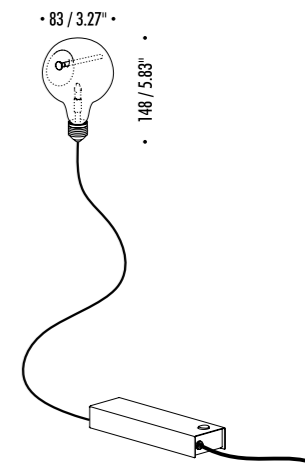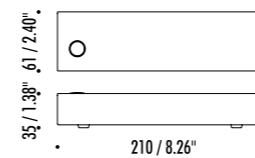


15130003	STANDARD	100-240 V - 50/60 Hz - MAX 10 W 12 V - G4 POWER SUPPLY WITH PLUG COAXIAL CABLE - DIMMER - HALOGEN BULB INCLUDED
		 10 W HALOGEN - 2800K - 130 lm - CRI 100 - DIMMABLE - EFFICIENCY C





LED PEN

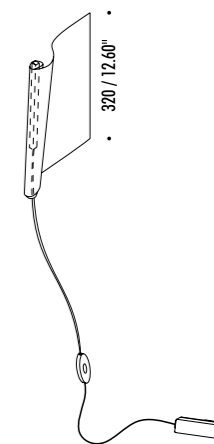



19790003	STANDARD	24 V DC - 3,6 W LED - 3000K - 280 lm - CRI > 90 LED PEN AND PAPER SHEET WITH MICRO SUCTION CUPS REPOSITIONABLE AT WILL INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz BLACK CABLE - DIMMER - INCLUDED 5 FILM WITH MICRO SUCTION CUPS

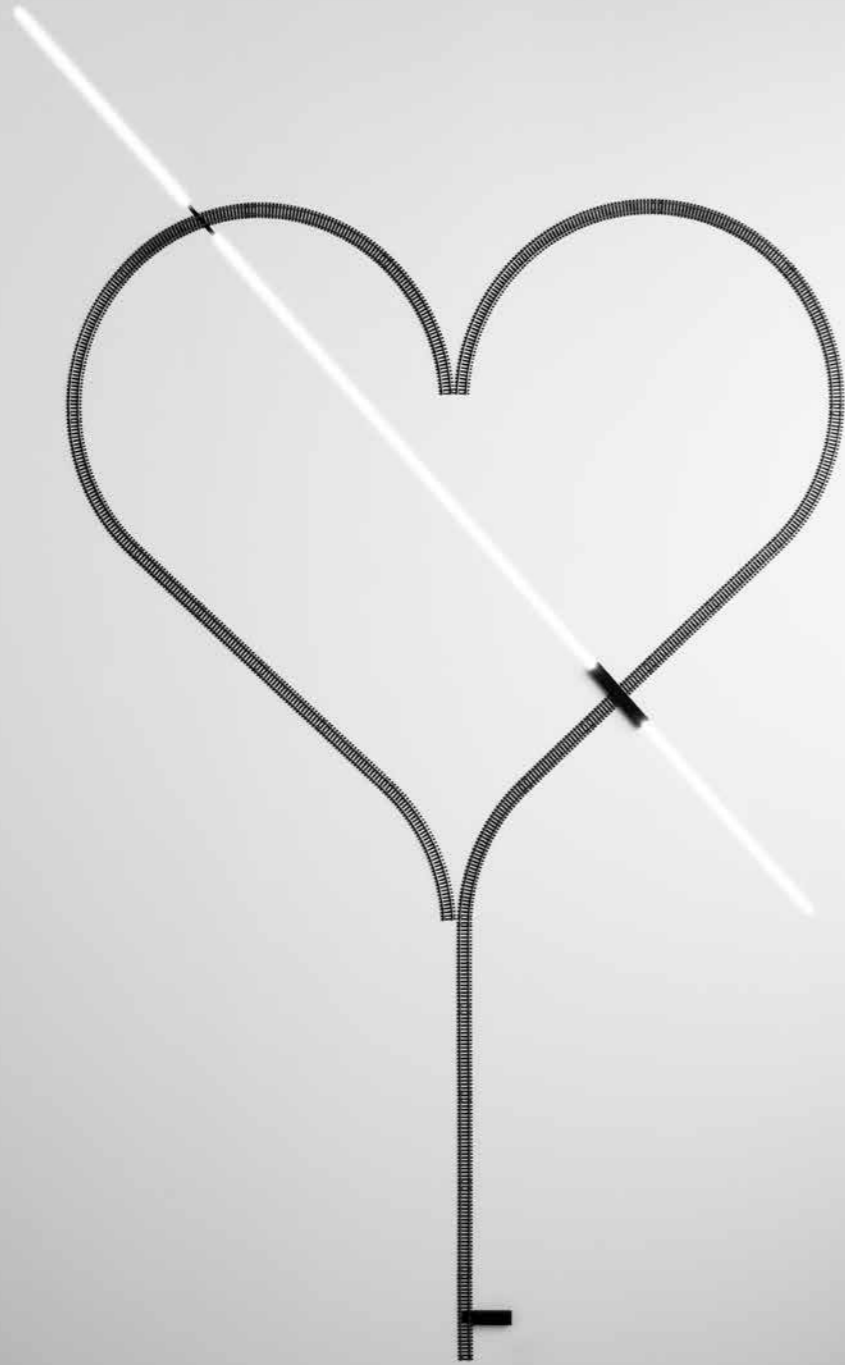


DRIVER

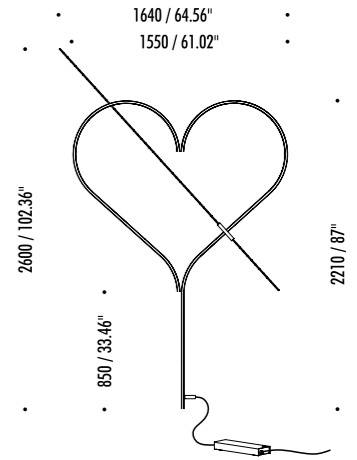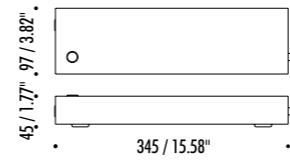

19810003	STANDARD	24 V DC - 22 W LED - 3000K - 2000 lm - CRI > 90 HEART CONFIGURATION INCLUDES POWER SUPPLY KIT WITH PLUG INPUT 100-240 V - 50/60 Hz DIMMER

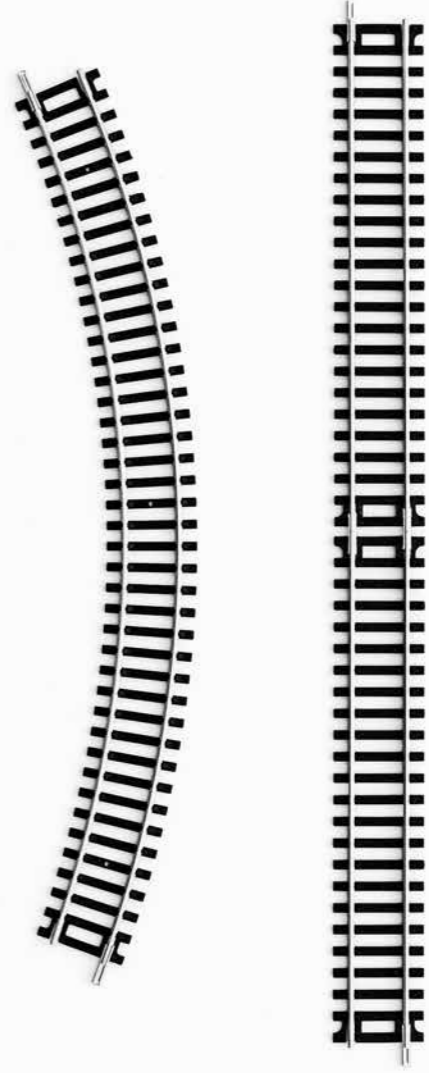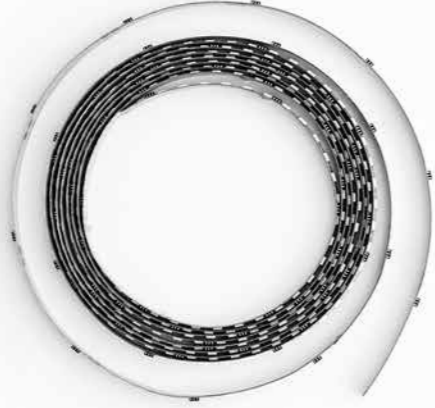

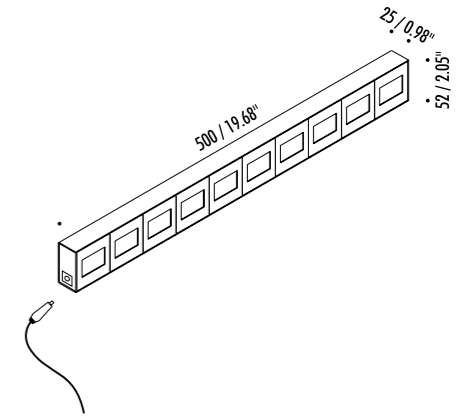


15330003	STANDARD	5 V DC - 3 W LED LUMINOUS WALL MODULE WITH SLOWLY FLASHING LIGHT CUSTOMIZABLE IMAGES - IMAGES NOT INCLUDED MODULES CONNECTOR INCLUDED POWER SUPPLY NOT INCLUDED
----------	----------	--



COMPULSORY ACCESSORIES

5065014	STANDARD	POWER SUPPLY WITH PLUG INPUT 120 V - 60 Hz - OUTPUT 5 V DC - 15 W MAX. 5 MODULES
---------	----------	--


CEILING

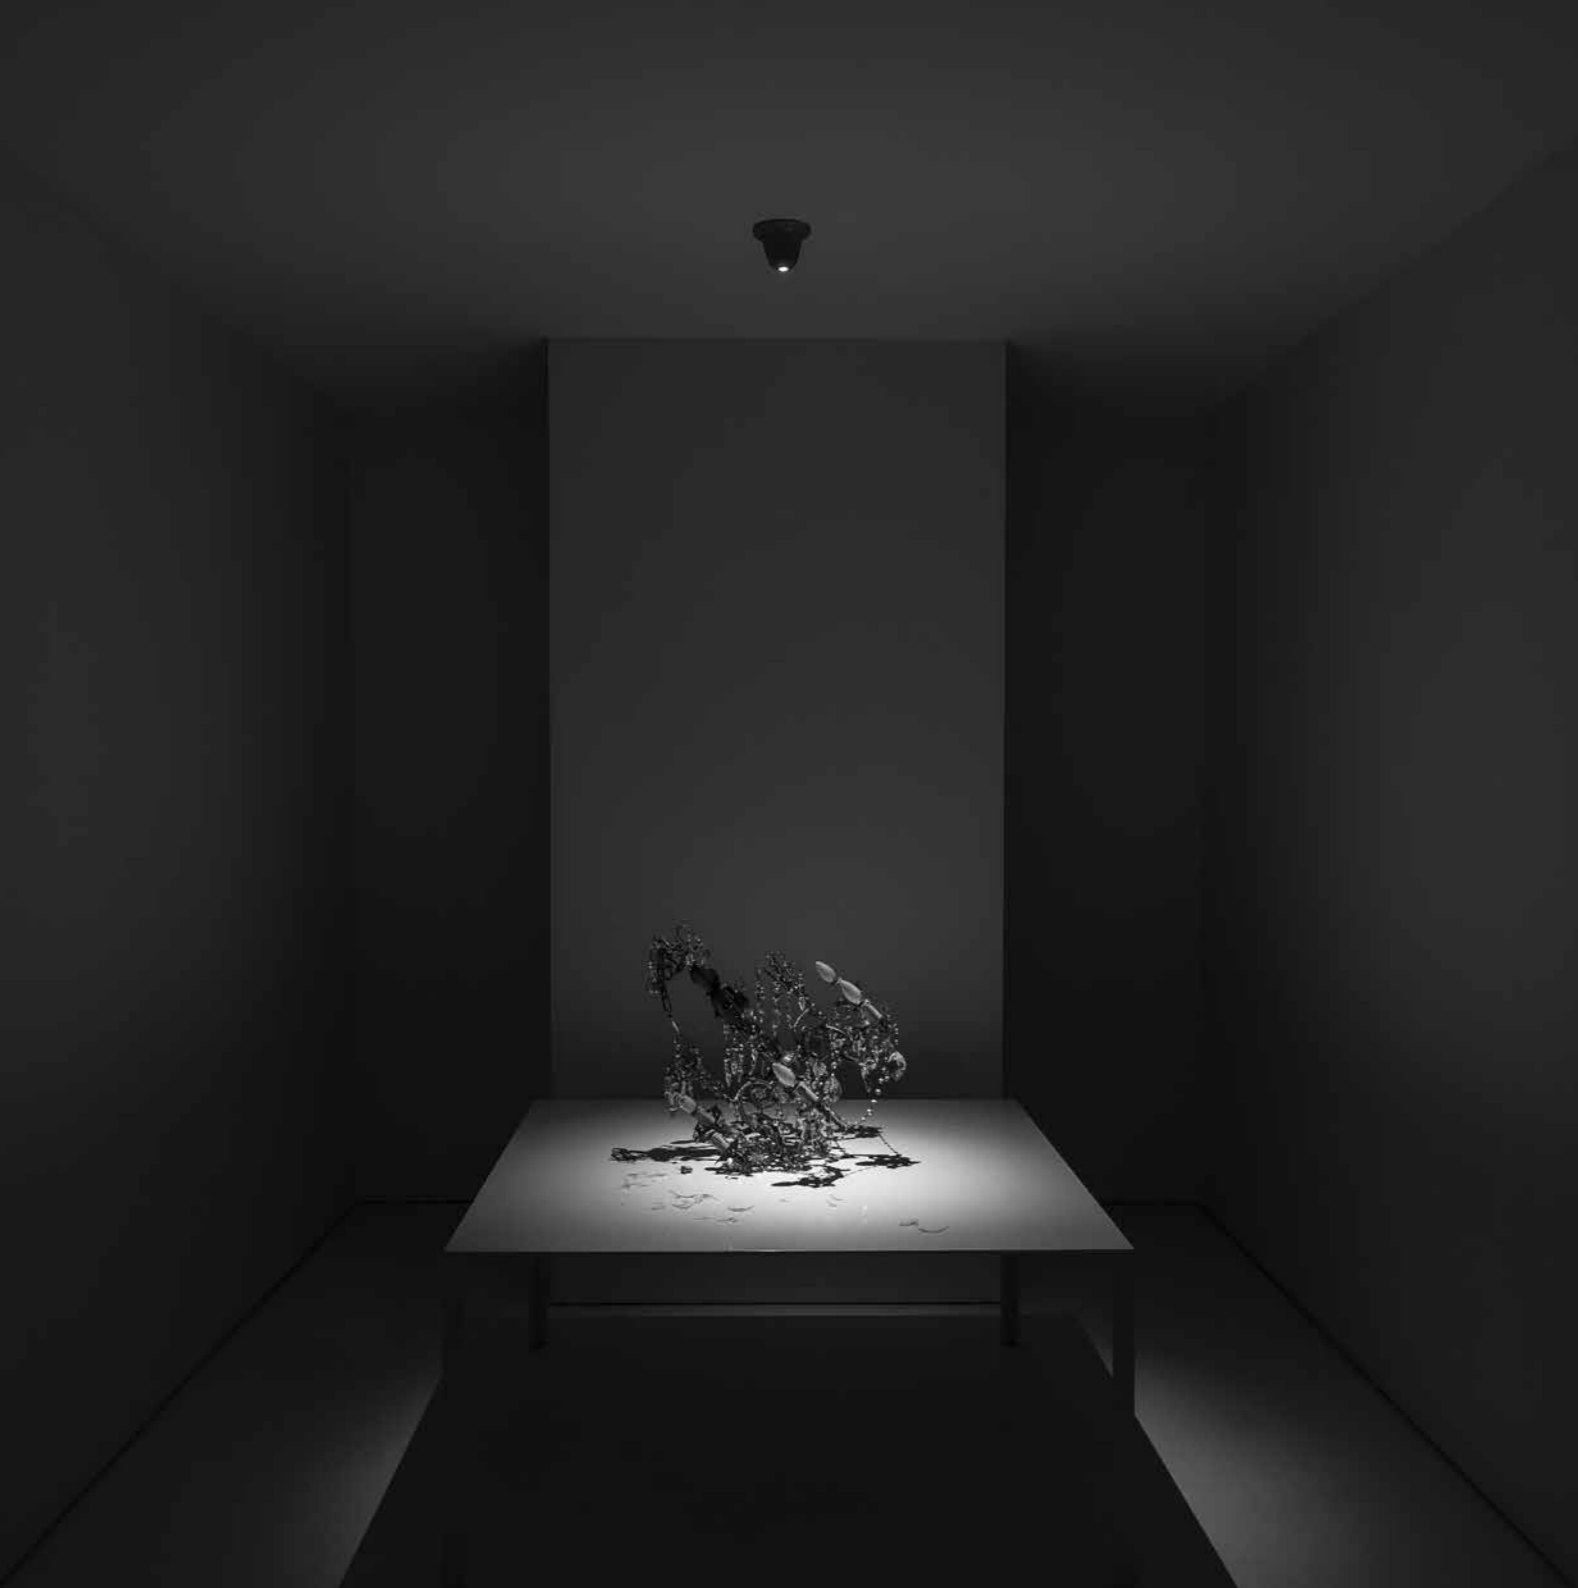




17590303	MATT WHITE	120 V - 60 Hz - 8,5 W LED - 3000K - 375 lm - CRI > 90 NOT DIMMABLE
17591503	NATURAL BRASS	

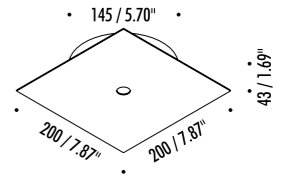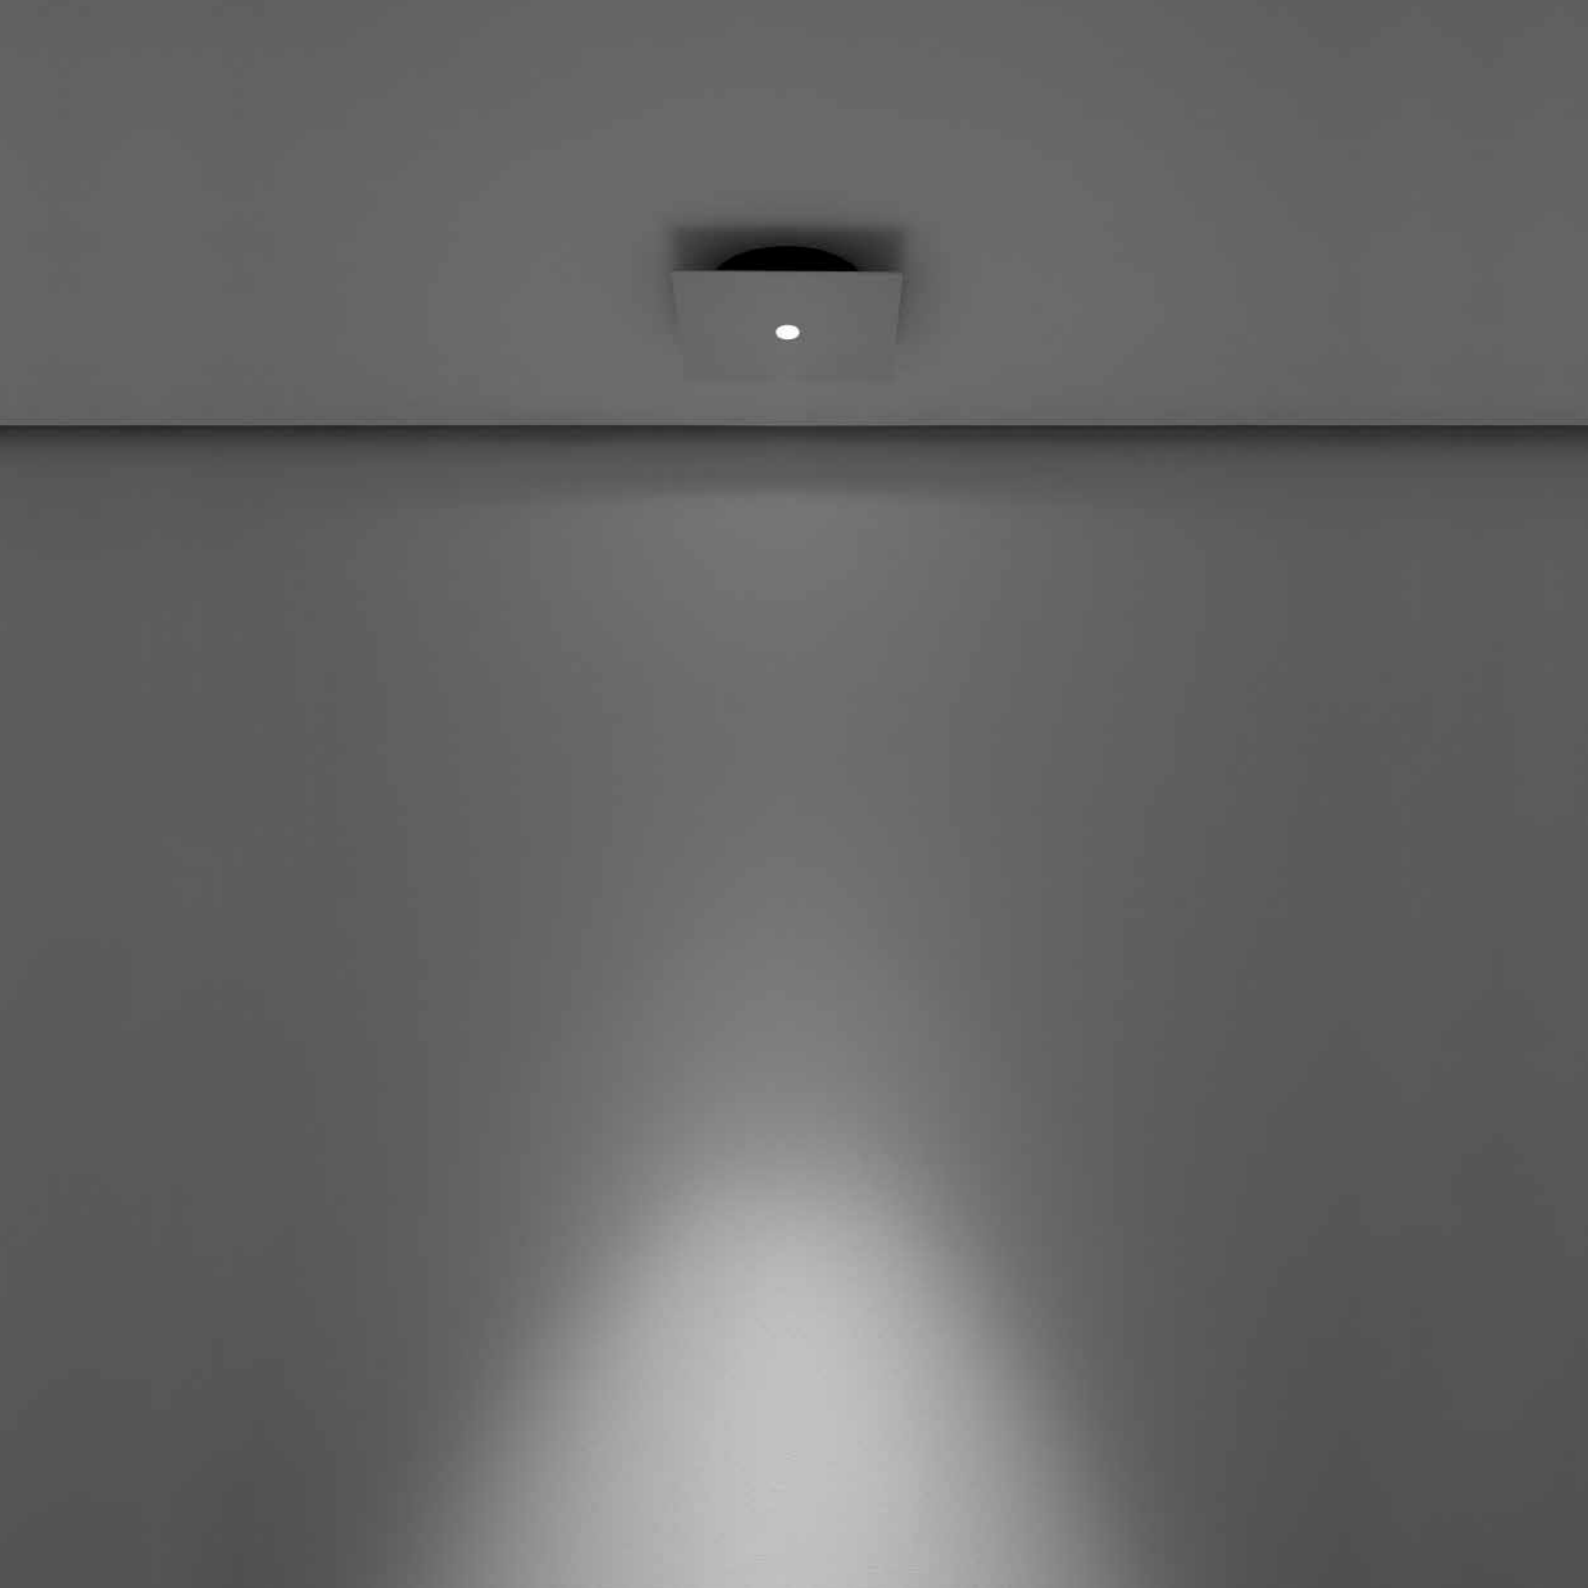

19230303	MATT WHITE - 3000K	120 V - 60 Hz - 8,5 W LED - 375 lm - CRI > 90 NOT DIMMABLE
19230303-27	MATT WHITE - 2700K	




18540303	MATT WHITE	120 V - 60 Hz - MAX 10 W LED - GU10 BULB NOT INCLUDED

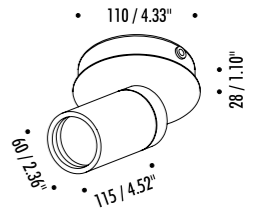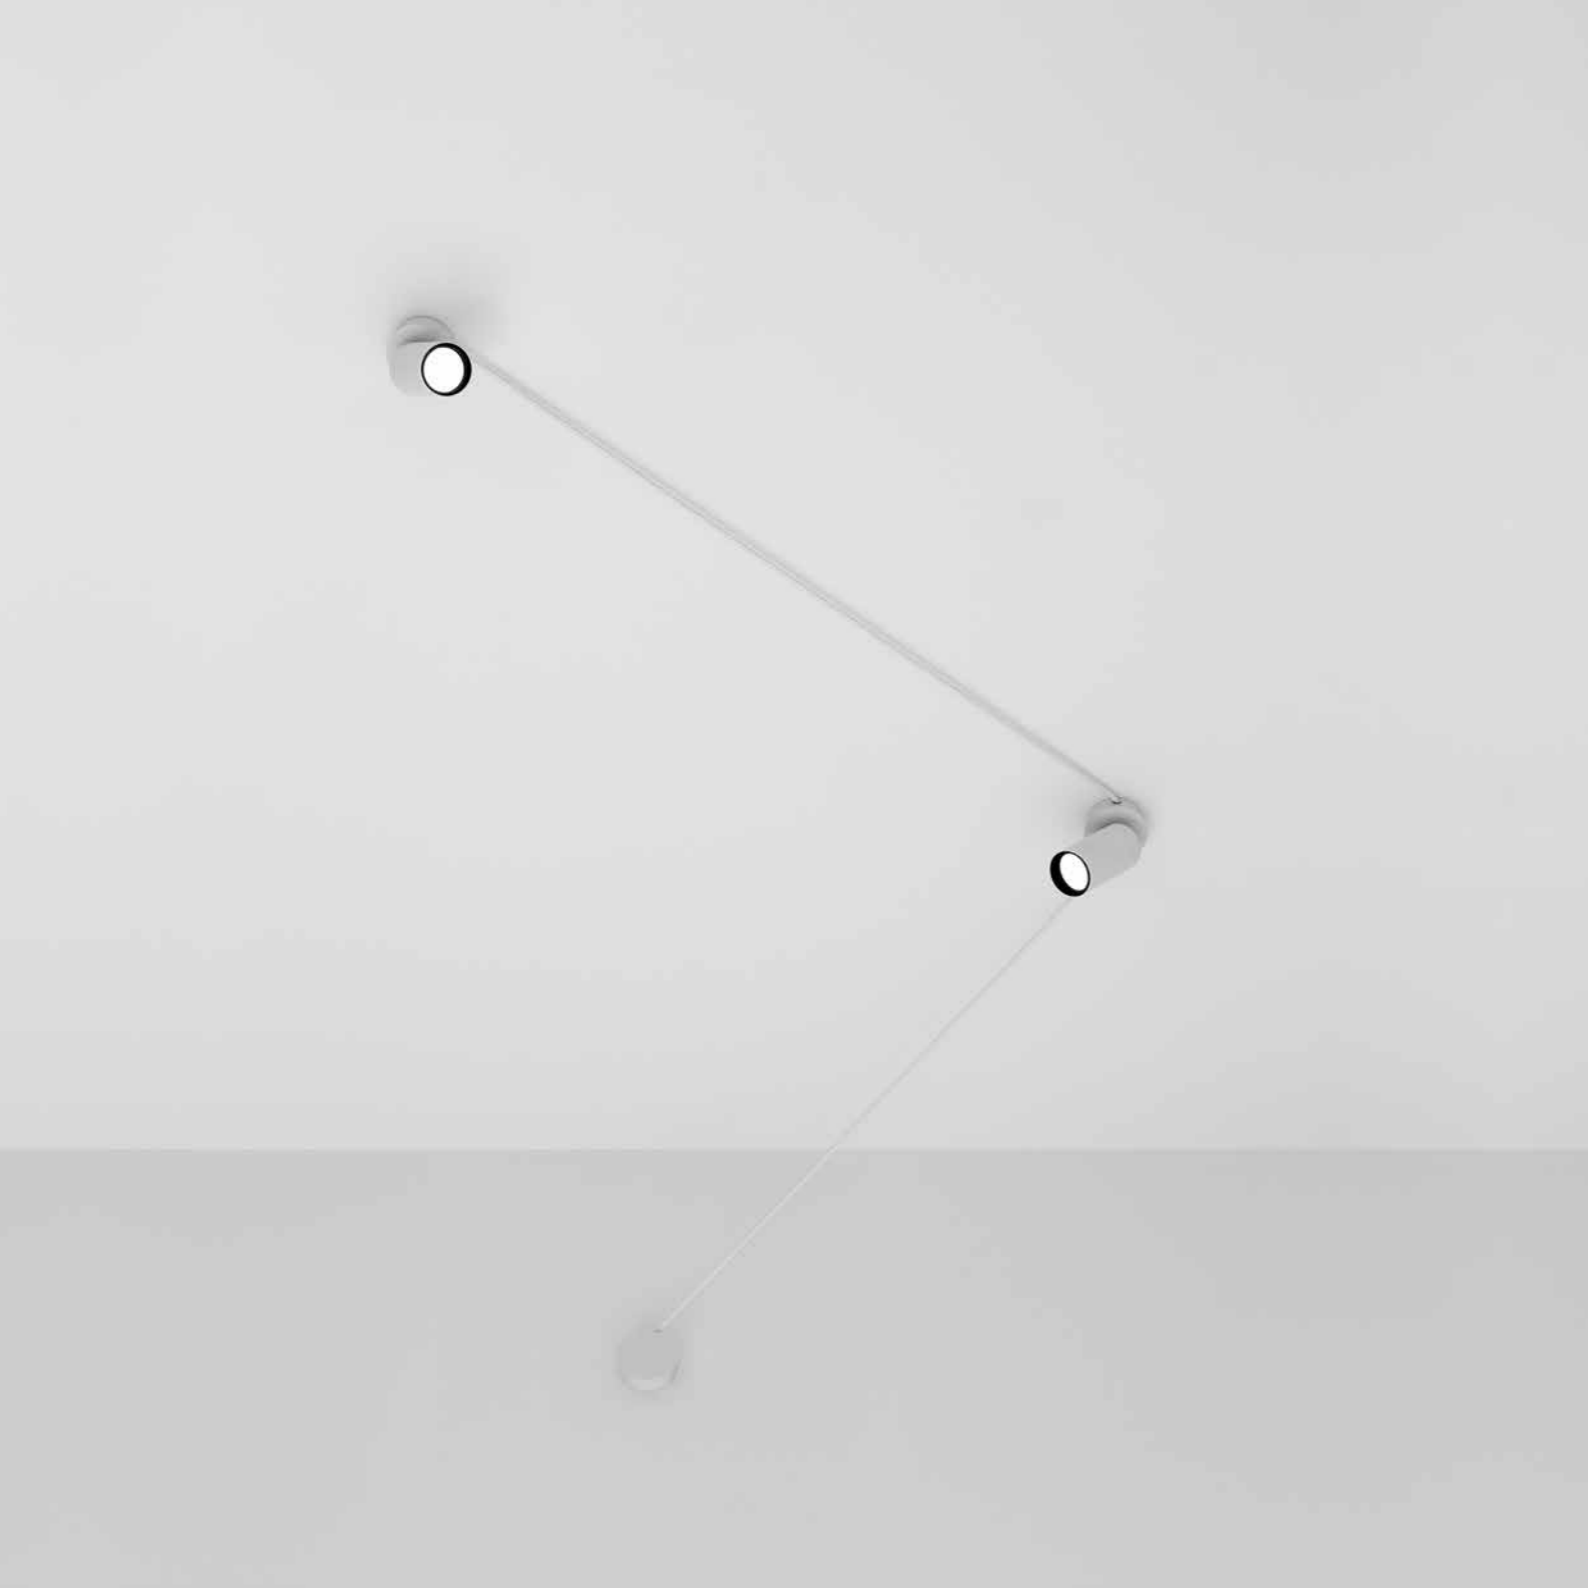


18530303	MATT WHITE	120 V - 60 Hz - MAX 10 W LED - GU10 ADJUSTABLE - BULB NOT INCLUDED WHITE CABLE 2 m MAXIMUM 20 CONNECTABLE LUMINAIRES
18530403	MATT BLACK	120 V - 60 Hz - MAX 10 W LED - GU10 ADJUSTABLE - BULB NOT INCLUDED BLACK CABLE 2 m MAXIMUM 20 CONNECTABLE LUMINAIRES

OPTIONAL ACCESSORIES

17470303	MATT WHITE	WALL AND CEILING ROSE
17470403	MATT BLACK	



18550303	MATT WHITE	120 V - 60 Hz - MAX 10 W LED - GU10 ADJUSTABLE - BULB NOT INCLUDED
18553403	MATT WHITE - BLACK BICOLOUR	



1A1110303	MATT WHITE	120 V - 60 Hz - MAX 15 W LED ADJUSTABLE - PUSH - 1-10 V DIMMABLE COMPULSORY LED MODULE NOT INCLUDED OPTIONAL LED MODULE ACCESSORIES
1A1113403	MATT WHITE - BLACK BICOLOUR	

COMPULSORY ACCESSORIES

50041500	LED MODULE 15° SPOT	MAX 15 W LED - 15° - 3000K - 1456 lm - CRI 90 - DIMMABLE
50041510	LED MODULE 15° SPOT	MAX 15 W LED - 15° - 2700K - 1350 lm - CRI 90 - DIMMABLE
50041350	LED MODULE 24° SPOT	MAX 15 W LED - 24° - 3000K - 1584 lm - CRI 90 - DIMMABLE
50041450	LED MODULE 24° SPOT	MAX 15 W LED - 24° - 2700K - 1480 lm - CRI 90 - DIMMABLE


OPTIONAL ACCESSORIES

1A1210003	STANDARD	DARKLIGHT
-----------	----------	-----------



DESIGN ALBERTO ZATTIN - 2000
 CEILING LAMP - METAL - GLASS

HAKO PL LED




16620303	MATT WHITE - 3000K	120 V - 60 Hz - 13,5 W LED - 869 lm - CRI > 80 TRIAC DIMMABLE
16620303-27	MATT WHITE - 2700K	



/ Absolute freedom, absolute spatiality, absolute creativity.


The possibility to take light anywhere, freely.
Technology helps to break down the boundaries.
Intangible, almost invisible materials, hidden, camouflages conductors,
thin cobwebs of filaments that carry and draw the light.

Light running on digital tracks, ultra-light and almost invisible wires,
modular tapes that can be laid limitlessly on
stairs, windows, glass panels.
Circuit that close, accent lighting, ultra-light diodes.
All this is **Sistemi**, a structure integrating four different,
modular and compatible designs.

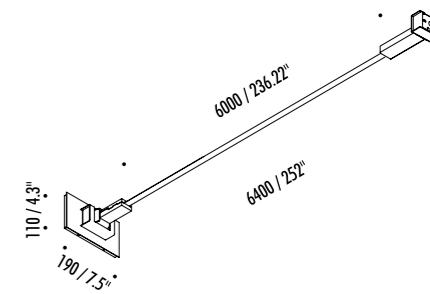



1A0580403	MATT BLACK - 3000K	INFINITO 6 - REMOTE KIT 24 V DC - 45 W LED - 4086 lm - CRI > 90 LED MODULE 6 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 50/60 Hz - DALI - PUSH - 0/1-10 V - TRIAC / IGBT DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0580403-27	MATT BLACK - 2700K	

1A0590403	MATT BLACK - 3000K	INFINITO 6 - PLUG KIT 24 V DC - 45 W LED - 4086 lm - CRI > 90 LED MODULE 6 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0590403-27	MATT BLACK - 2700K	

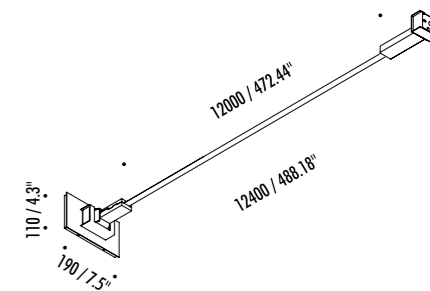



1A0600403	MATT BLACK - 3000K	INFINITO 12 - REMOTE KIT 24 V DC - 90 W LED - 8172 lm - CRI > 90 LED MODULE 12 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH LENGTHS AVAILABLE ON REQUEST 18 m - 24 m WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DALI - PUSH - 0/1-10 V - TRIAC / IGBT - DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0600403-27	MATT BLACK - 2700K	

1A0610403	MATT BLACK - 3000K	INFINITO 12 - PLUG KIT 24 V DC - 90 W LED - 8172 lm - CRI > 90 LED MODULE 12 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH LENGTHS AVAILABLE ON REQUEST 18 m - 24 m WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0610403-27	MATT BLACK - 2700K	

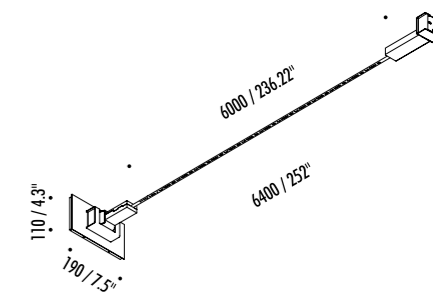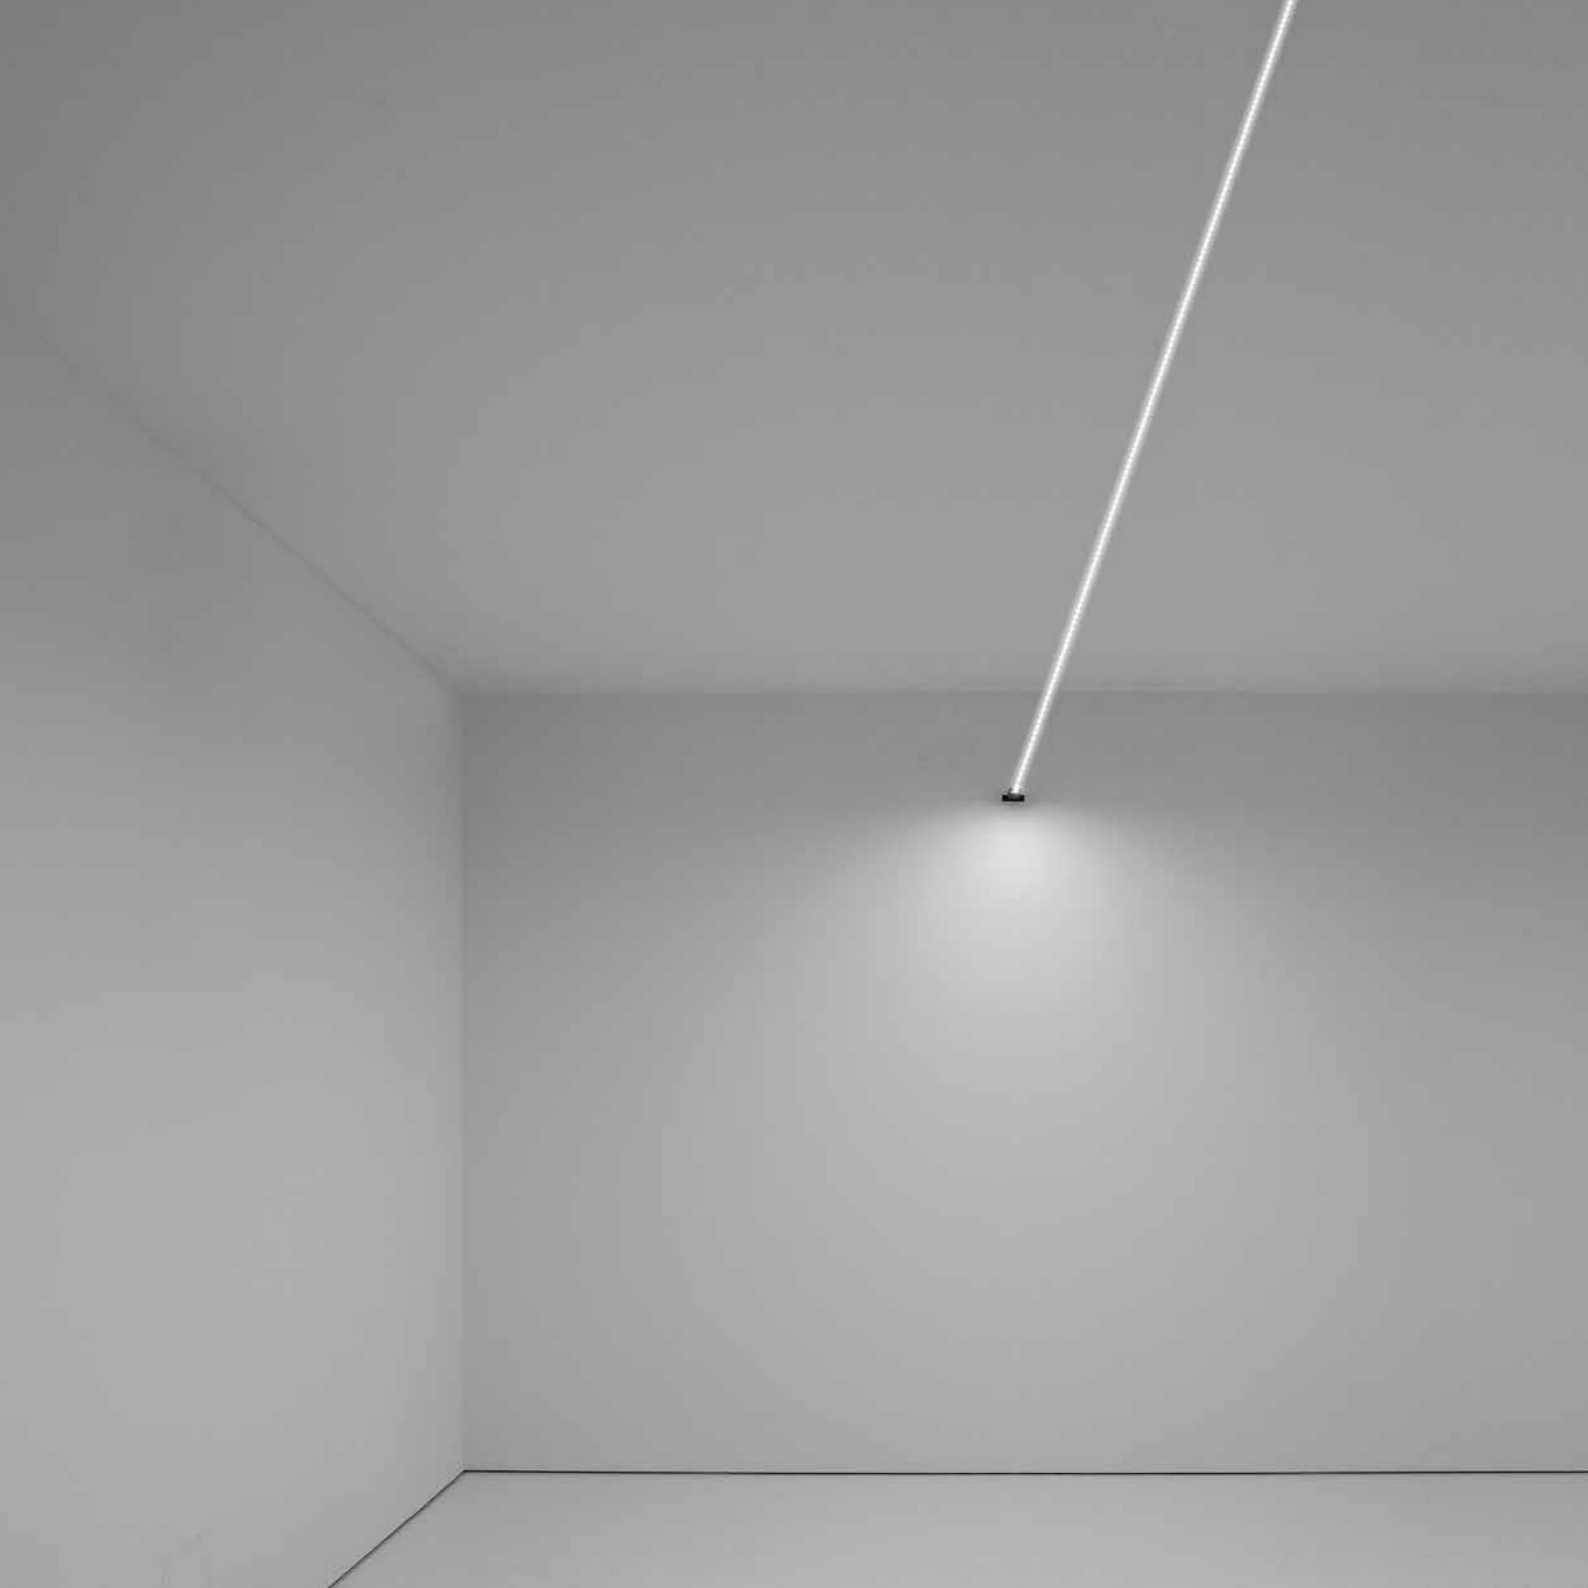

1A0620403	MATT BLACK - 3000K	FLASH 6 - REMOTE KIT 24 V DC - 45 W LED - 4086 lm - CRI > 90 LED MODULE 6 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 50/60 Hz - DALI - PUSH - 0/1-10 V - TRIAC / IGBT DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0620403-27	MATT BLACK - 2700K	

1A0630403	MATT BLACK - 3000K	FLASH 6 - PLUG KIT 24 V DC - 45 W LED - 4086 lm - CRI > 90 LED MODULE 6 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0630403-27	MATT BLACK - 2700K	

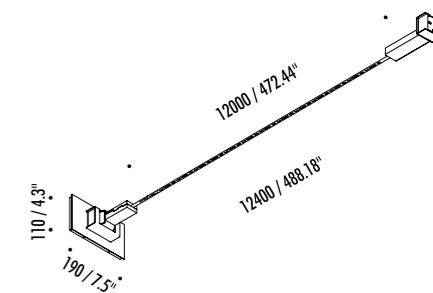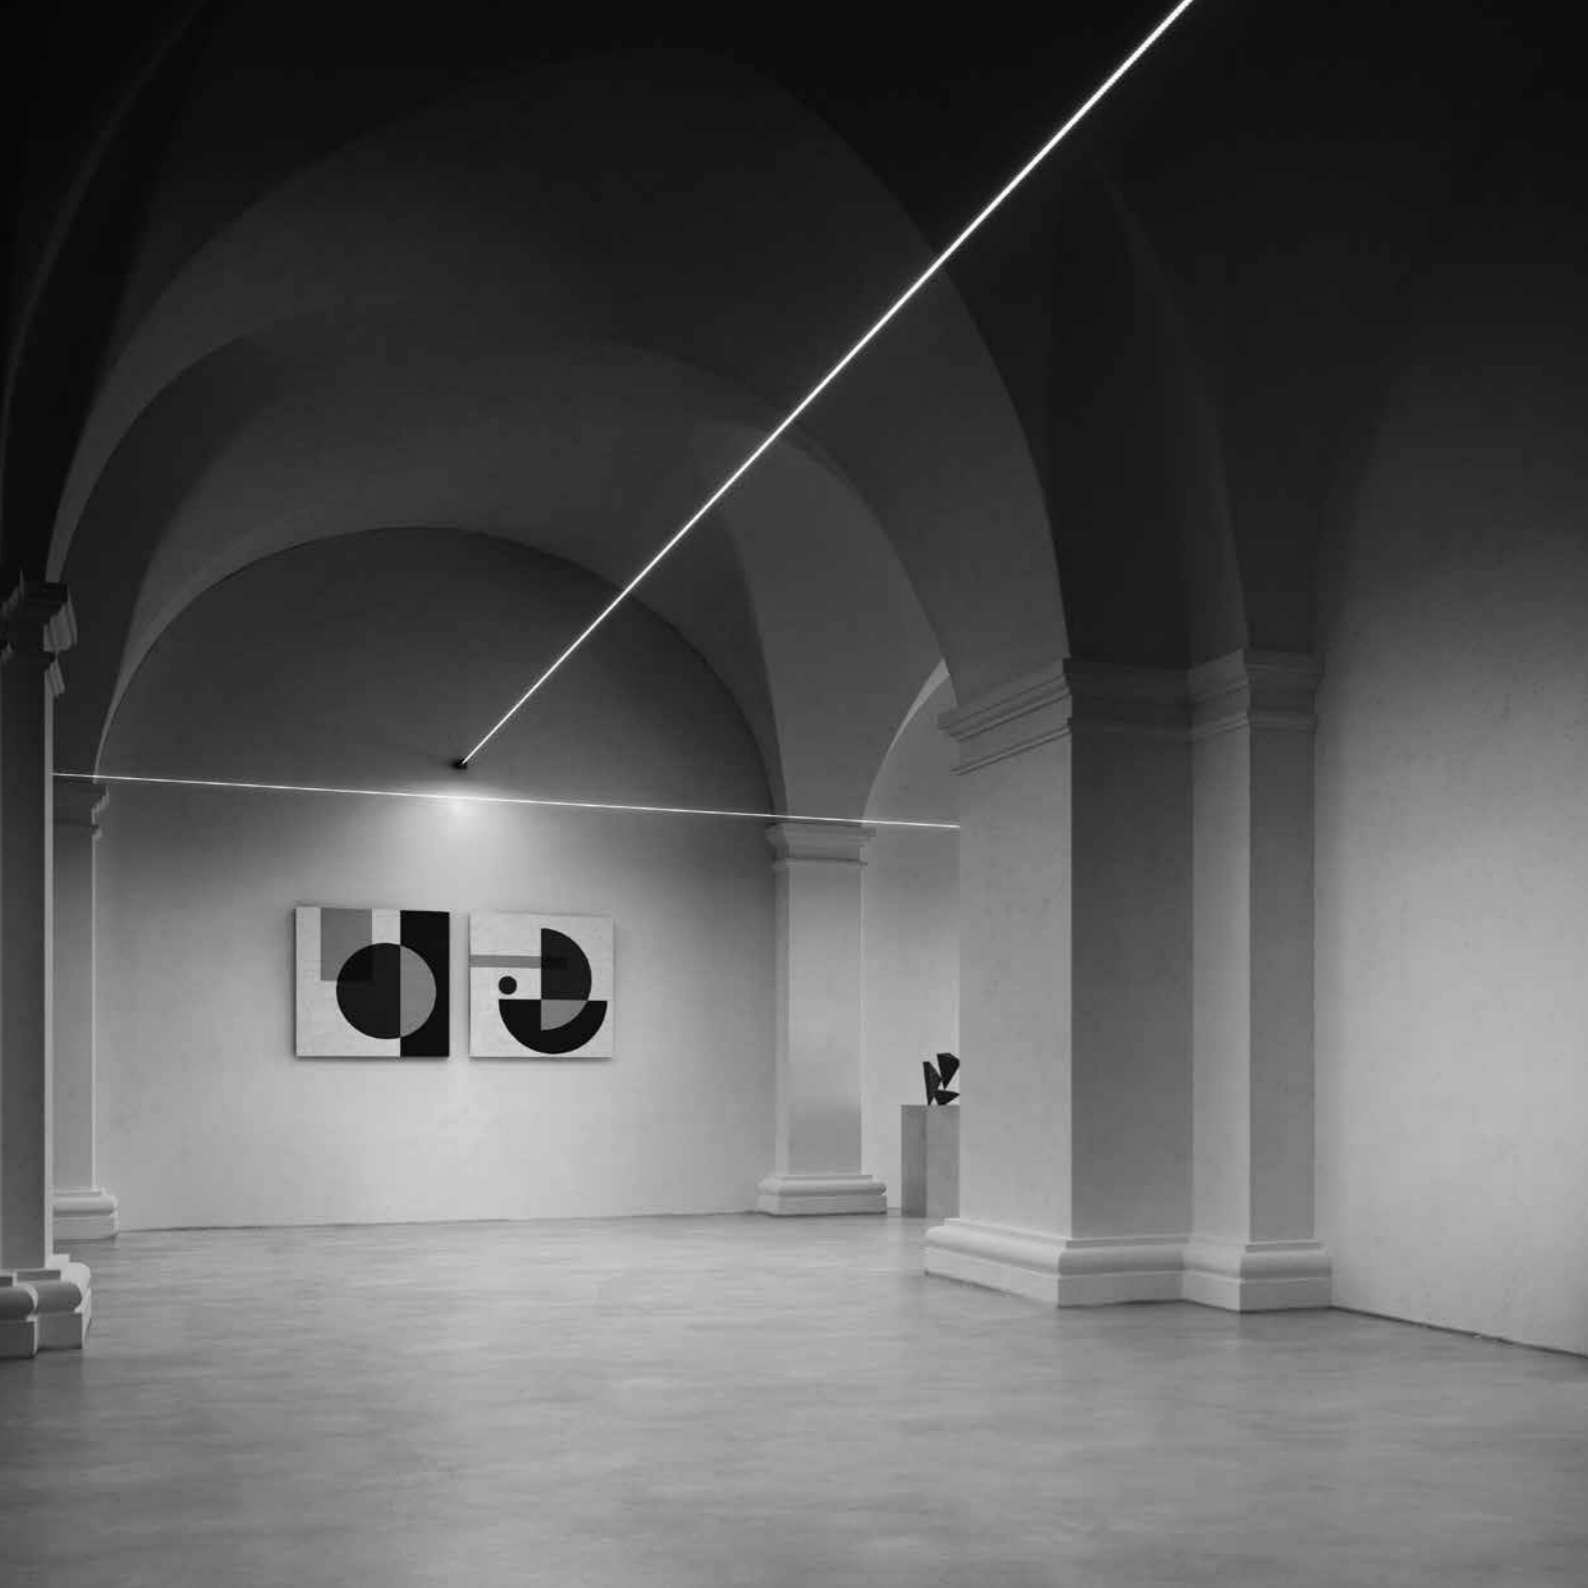


1A0640403	MATT BLACK - 3000K	FLASH 12 - REMOTE KIT 24 V DC - 90 W LED - 8172 lm - CRI > 90 LED MODULE 12 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH LENGTHS AVAILABLE ON REQUEST 18 m - 24 m WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DALI - PUSH - 0/1-10 V - TRIAC / IGBT - DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0640403-27	MATT BLACK - 2700K	




1A0650403	MATT BLACK - 3000K	FLASH 12 - PLUG KIT 24 V DC - 90 W LED - 8172 lm - CRI > 90 LED MODULE 12 m LONG - CAN BE CUT INTO ANY DESIRED LENGTH LENGTHS AVAILABLE ON REQUEST 18 m - 24 m WHITE WALL BACK PLATE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 183 INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 185
1A0650403-27	MATT BLACK - 2700K	



REMOTE POWER SUPPLY KIT

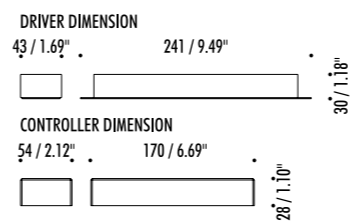





POWER SUPPLY KIT WITH PLUG

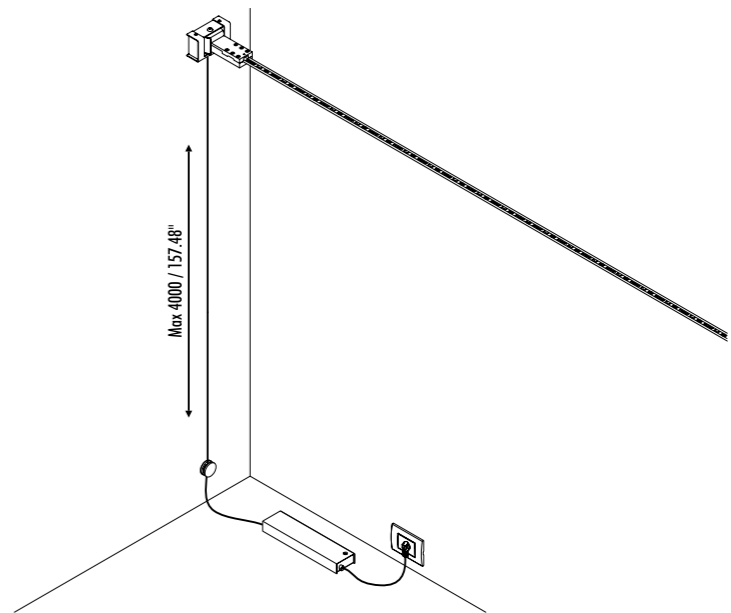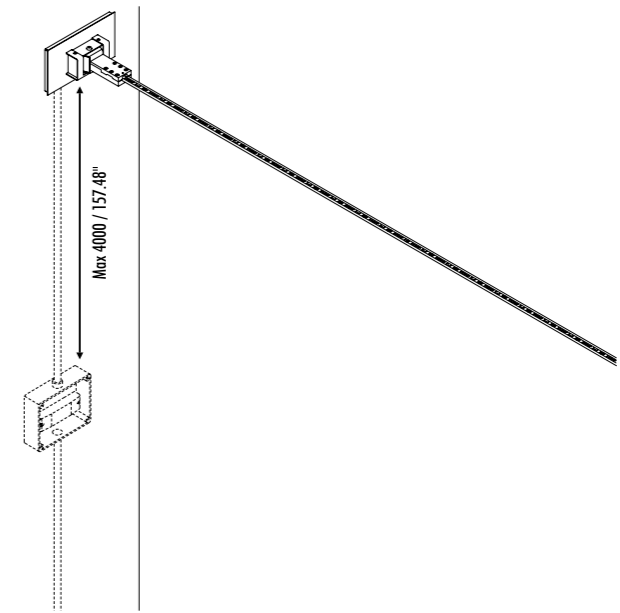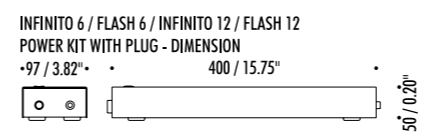




OPTIONAL ACCESSORIES



1A0080403	MATT BLACK	CEILING CONNECTION KIT	
17470403	MATT BLACK	WALL AND CEILING ROSE	
1A0120403	MATT BLACK	KIT WALL CONNECTION VERTICAL SLOPED 45°	
1A0340403	MATT BLACK	KIT WALL CONNECTION SLOPED RIGHT 75°	
1A0350403	MATT BLACK	KIT WALL CONNECTION SLOPED LEFT 75°	
1A0290403	MATT BLACK	SWALLOWS FOR INFINITO ONLY	
1A0800403	MATT BLACK	SWALLOWS FOR FLASH ONLY	

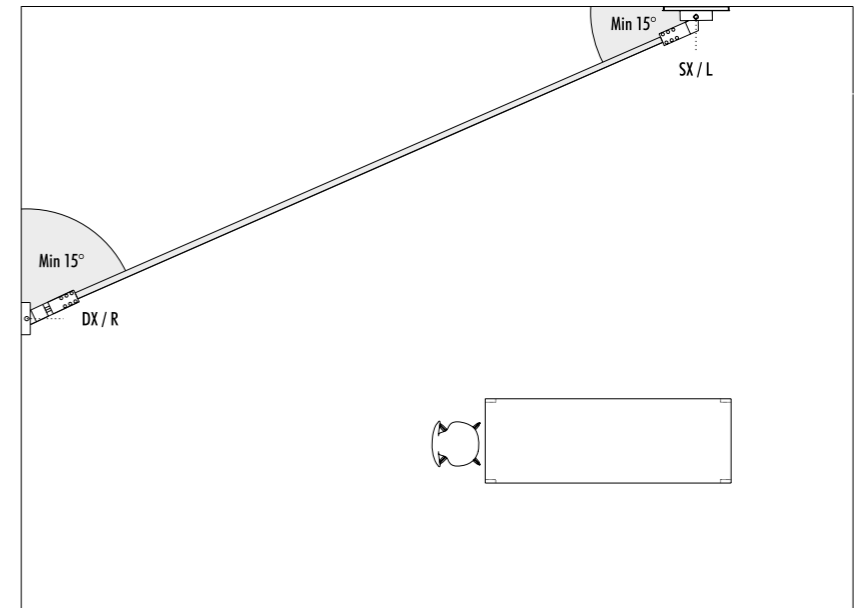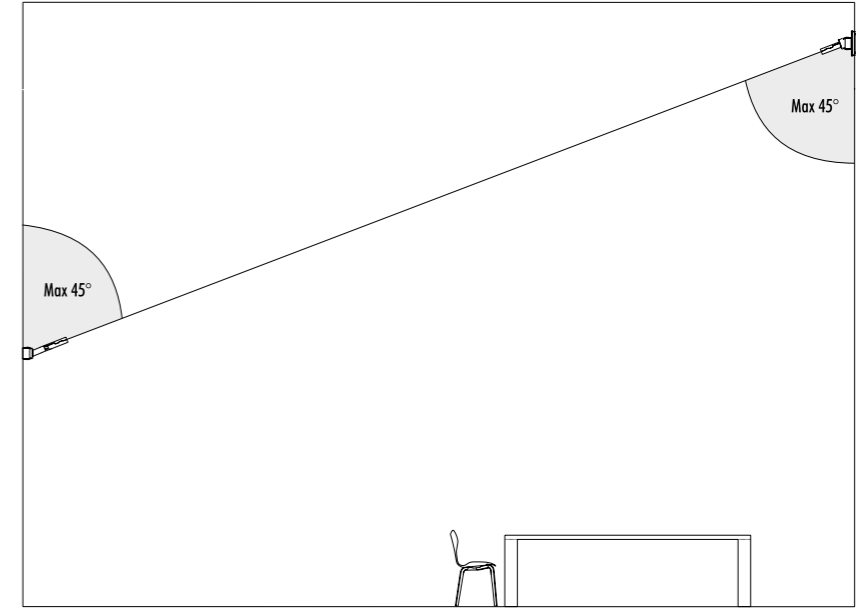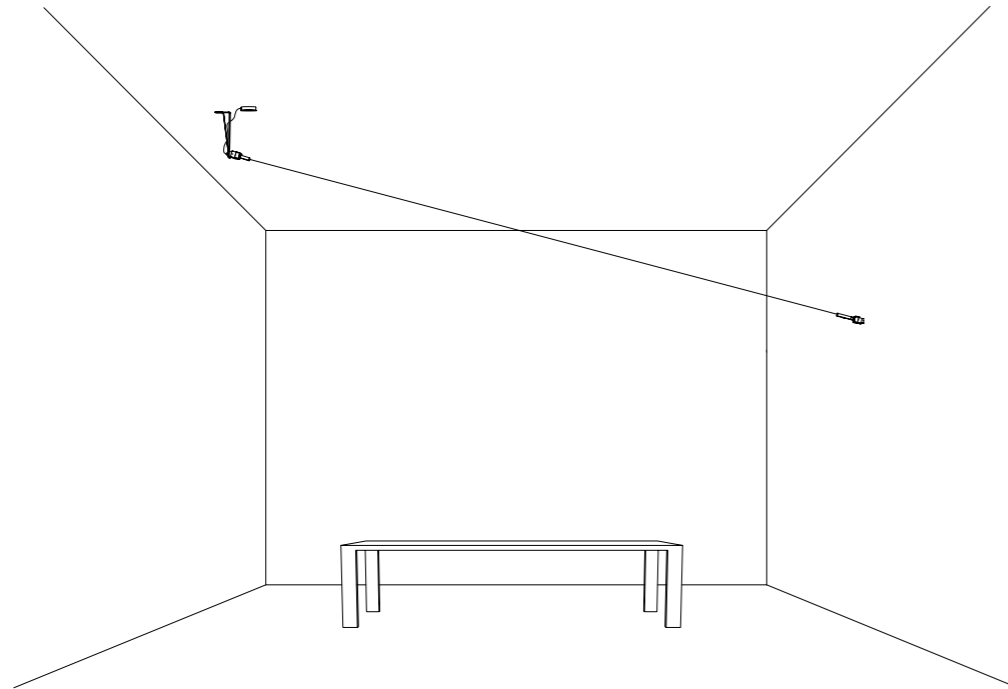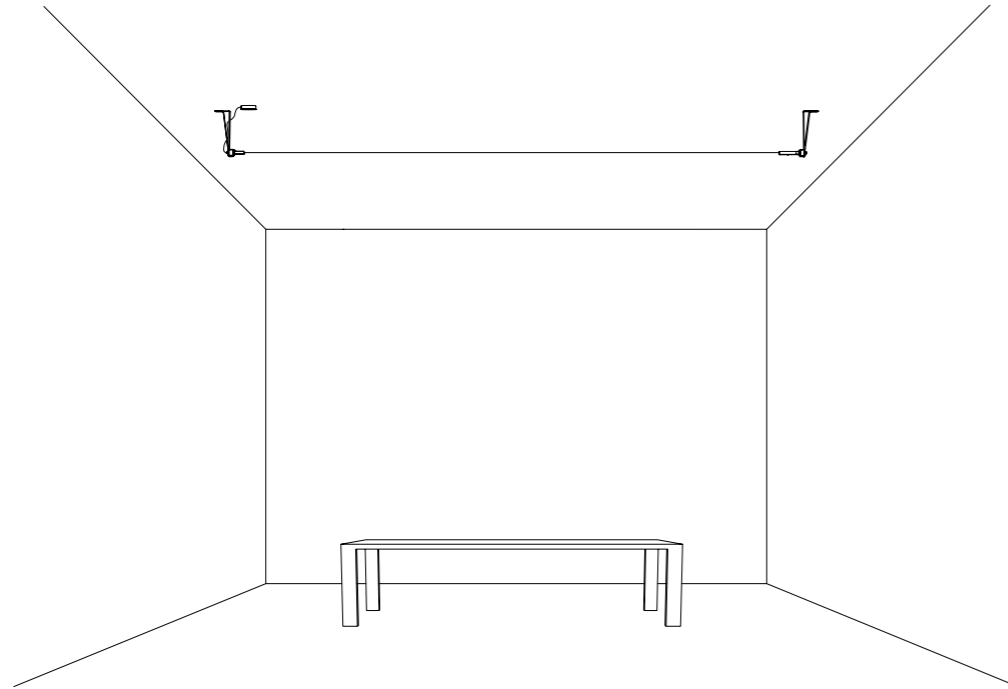



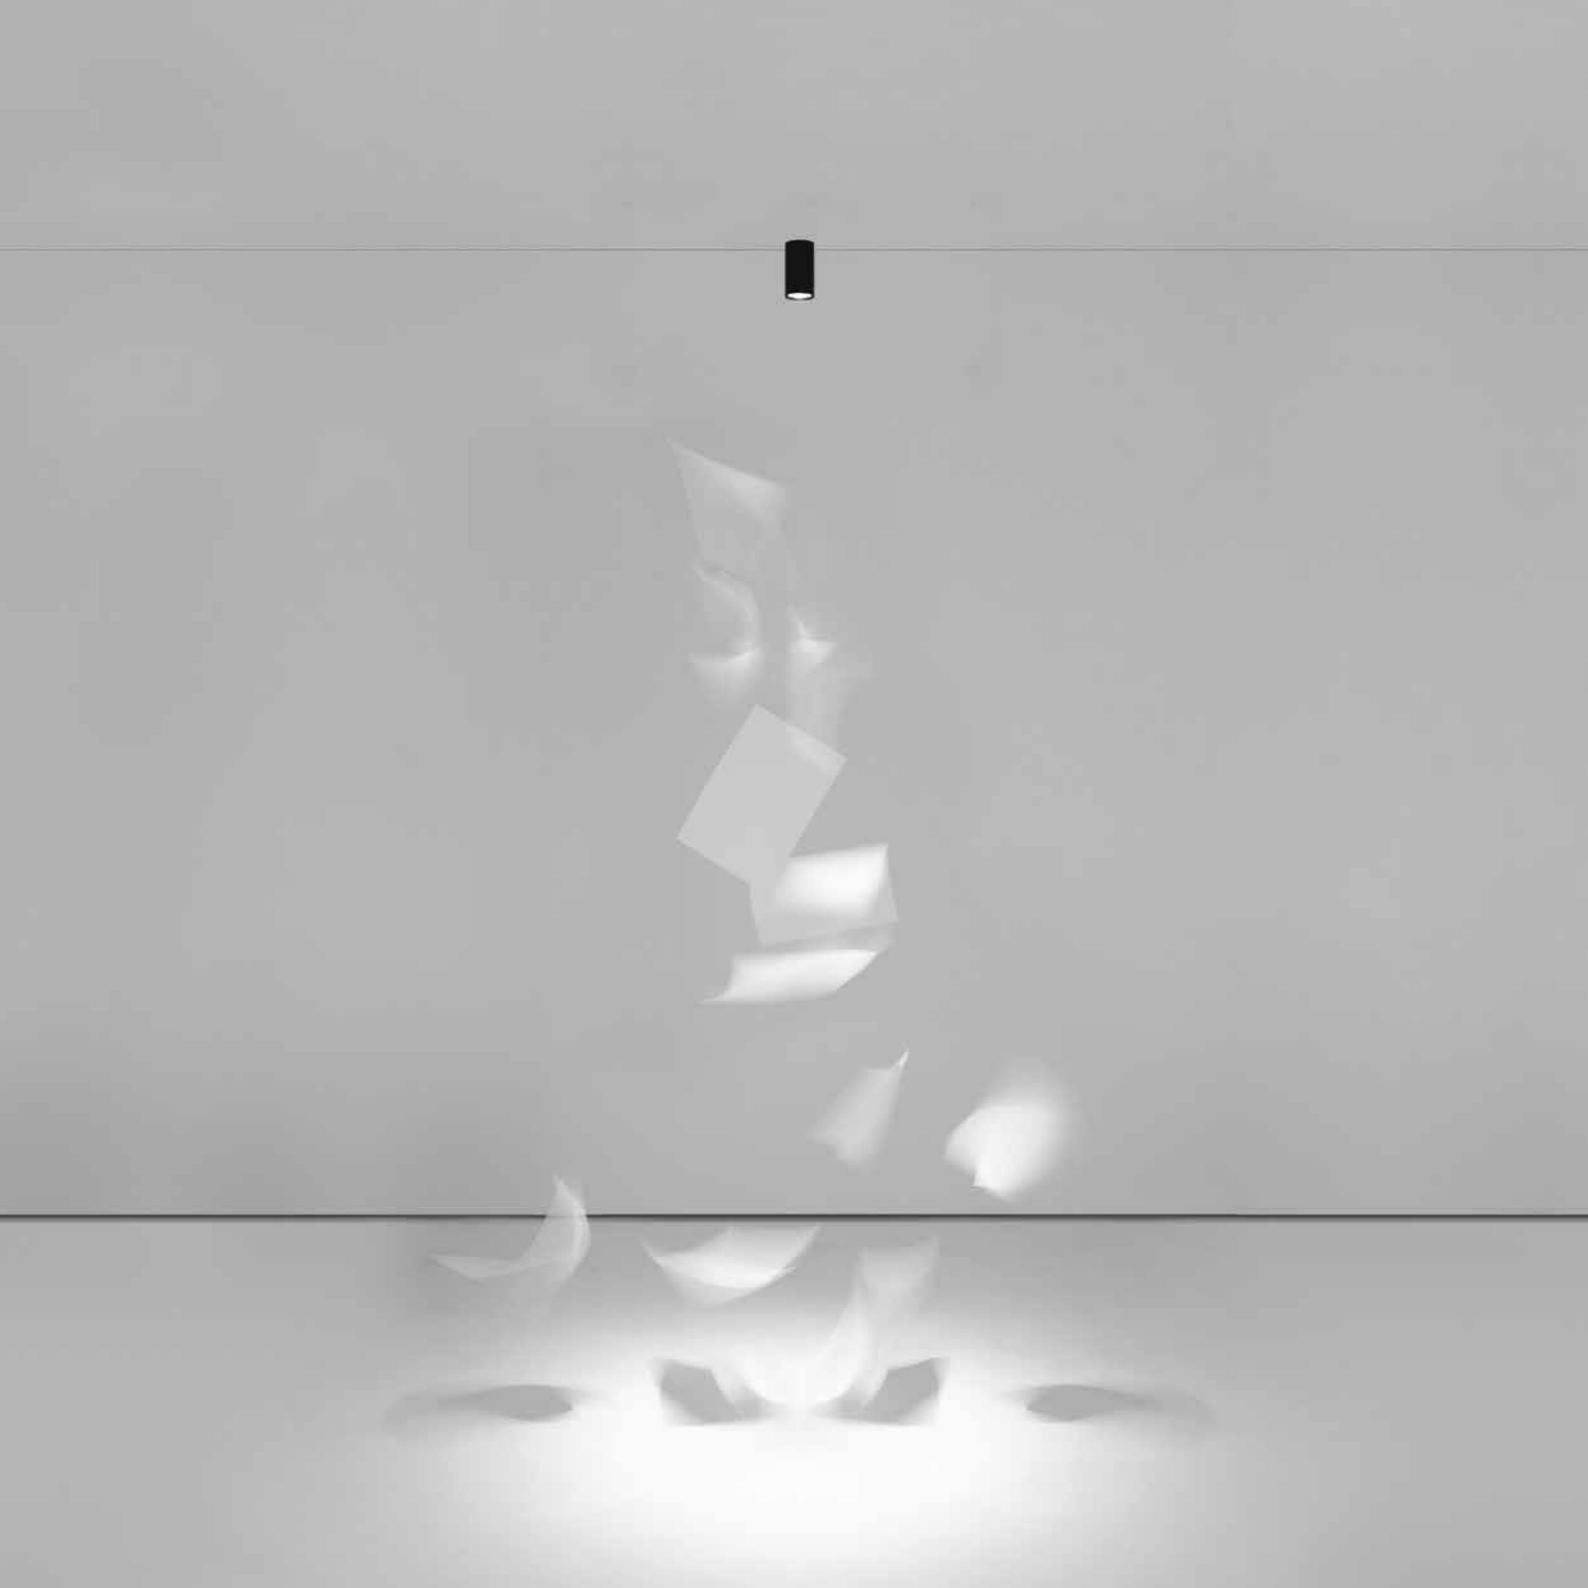


TIE ROD

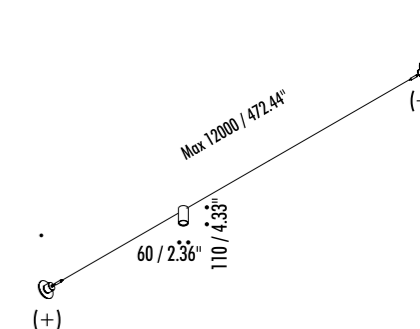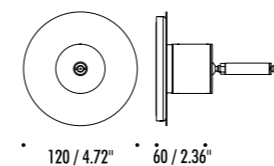



1A0760403	STANDARD NARROW BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95 UNIPOLAR WIRE 12 m - 2 WHITE TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 193 INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 201
1A0760403-27	STANDARD NARROW BEAM - 2700K	
1A0460403	STANDARD MEDIUM BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95 UNIPOLAR WIRE 12 m - 2 WHITE TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 193 INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 201
1A0460403-27	STANDARD MEDIUM BEAM - 2700K	


DRIVER DIMENSION

• 79 / 3.11" • • 124 / 4.88" •
22 / 0.87"

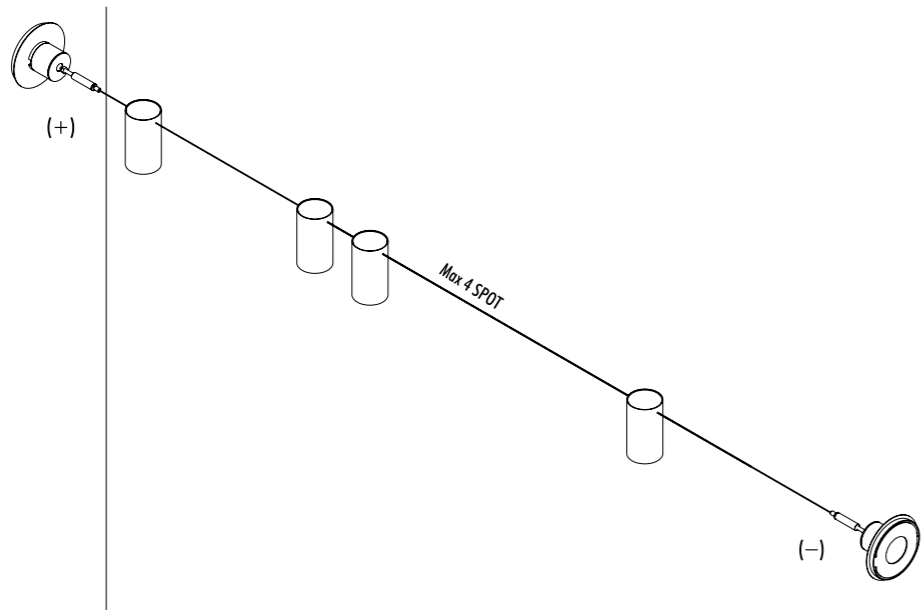



LAYOUT EXAMPLES

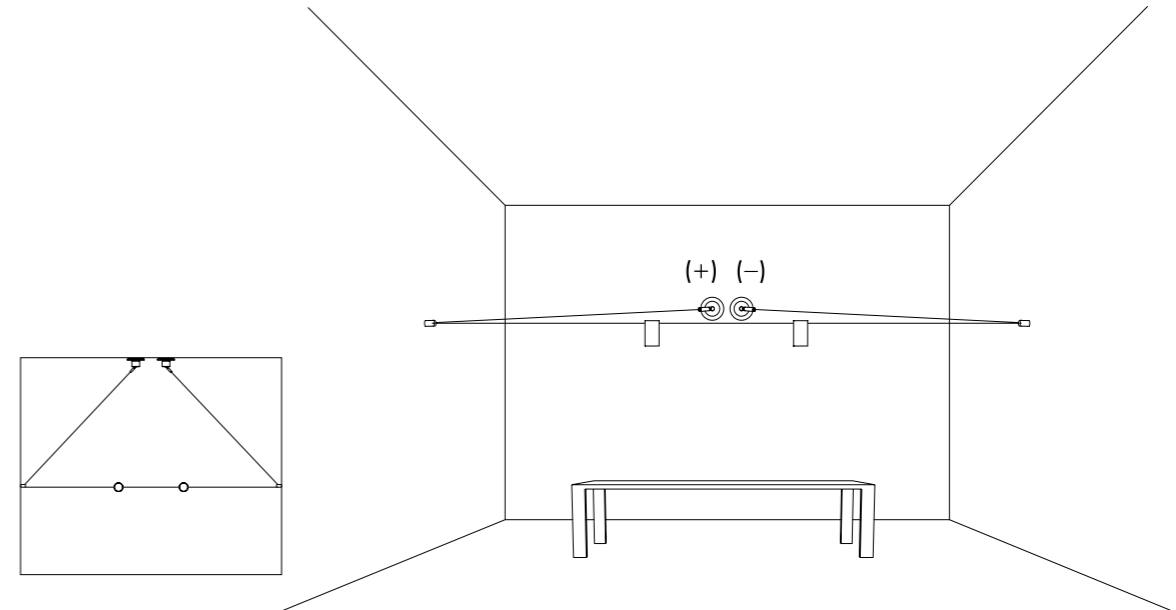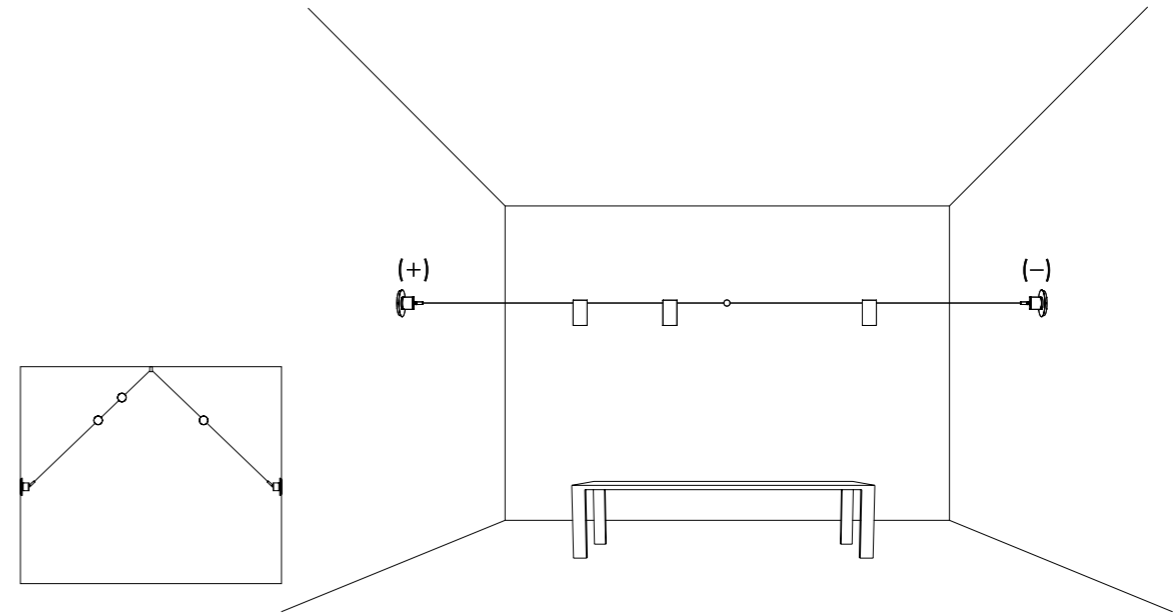

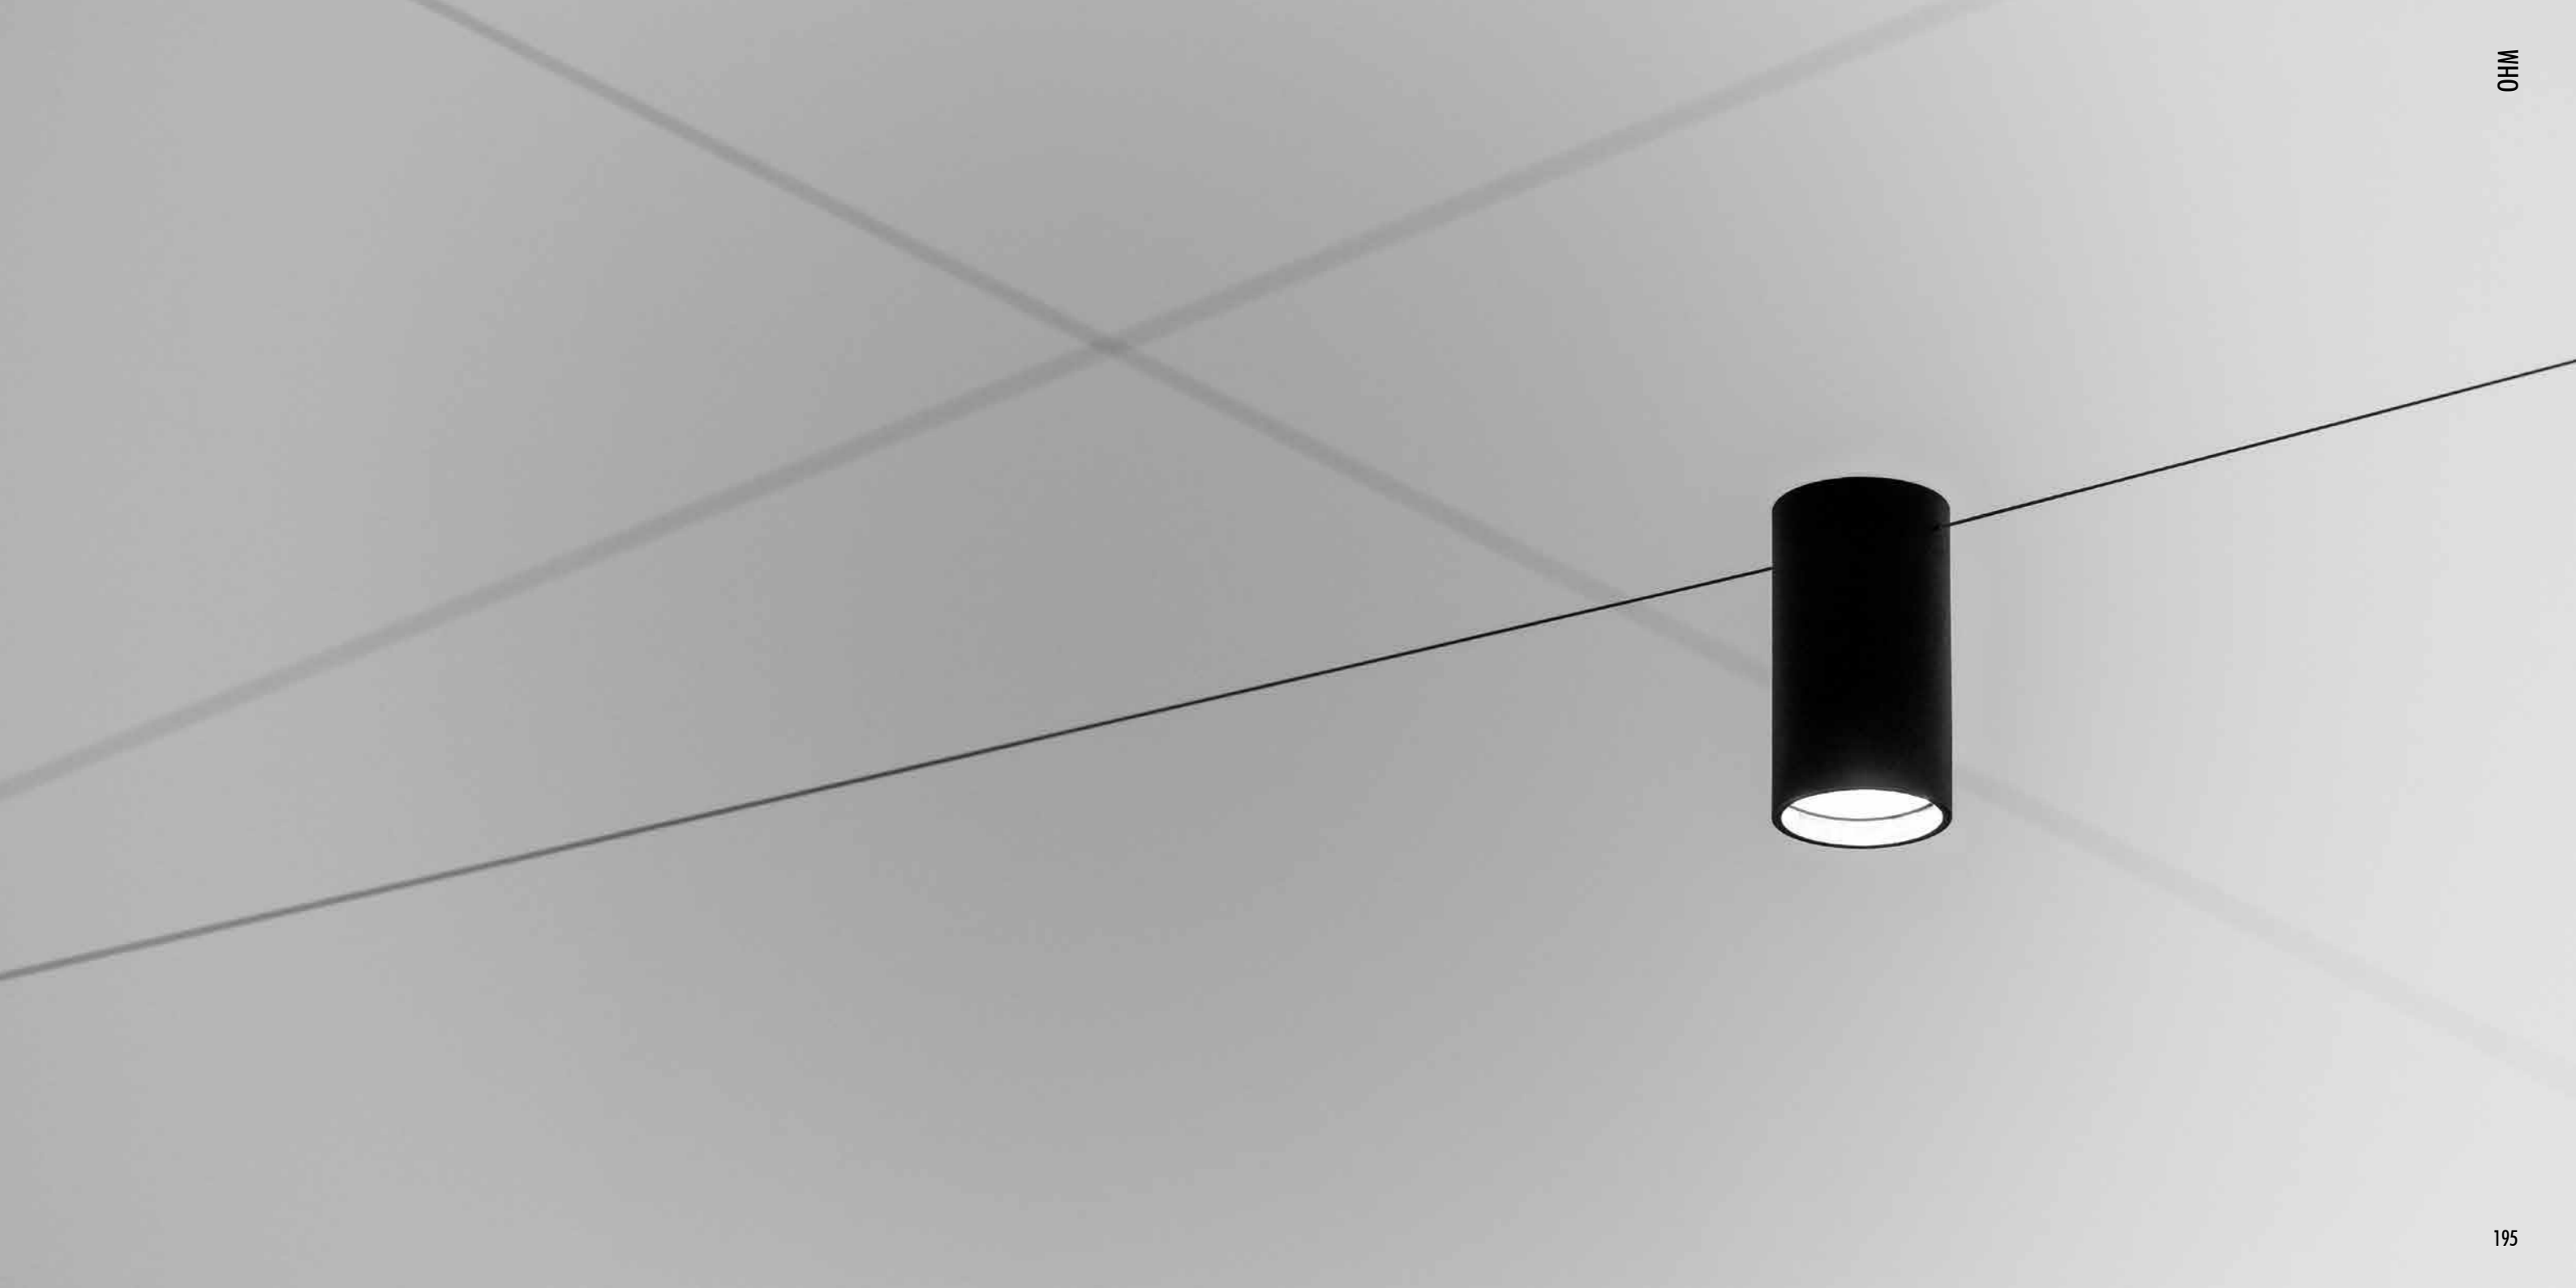






WALL ROSE

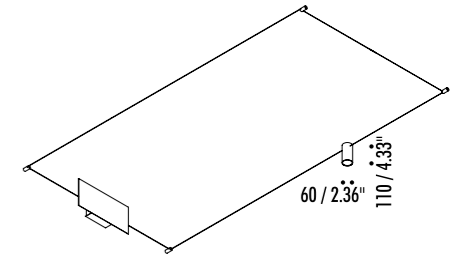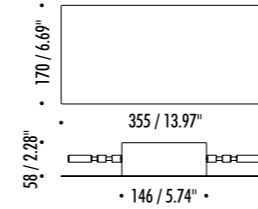


1A0750403	STANDARD NARROW BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95 UNIPOLAR WIRE 24 m - 4 BLACK WIRES GUIDE - MAX 4 SPOT ON UNIPOLAR WIRE WHITE WALL ROSE INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 201
1A0750403-27	STANDARD NARROW BEAM - 2700K	
19780403	STANDARD MEDIUM BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95 UNIPOLAR WIRE 24 m - 4 BLACK WIRES GUIDE - MAX 4 SPOT ON UNIPOLAR WIRE WHITE WALL ROSE INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED - SEE PAGE 201
19780403-27	STANDARD MEDIUM BEAM - 2700K	

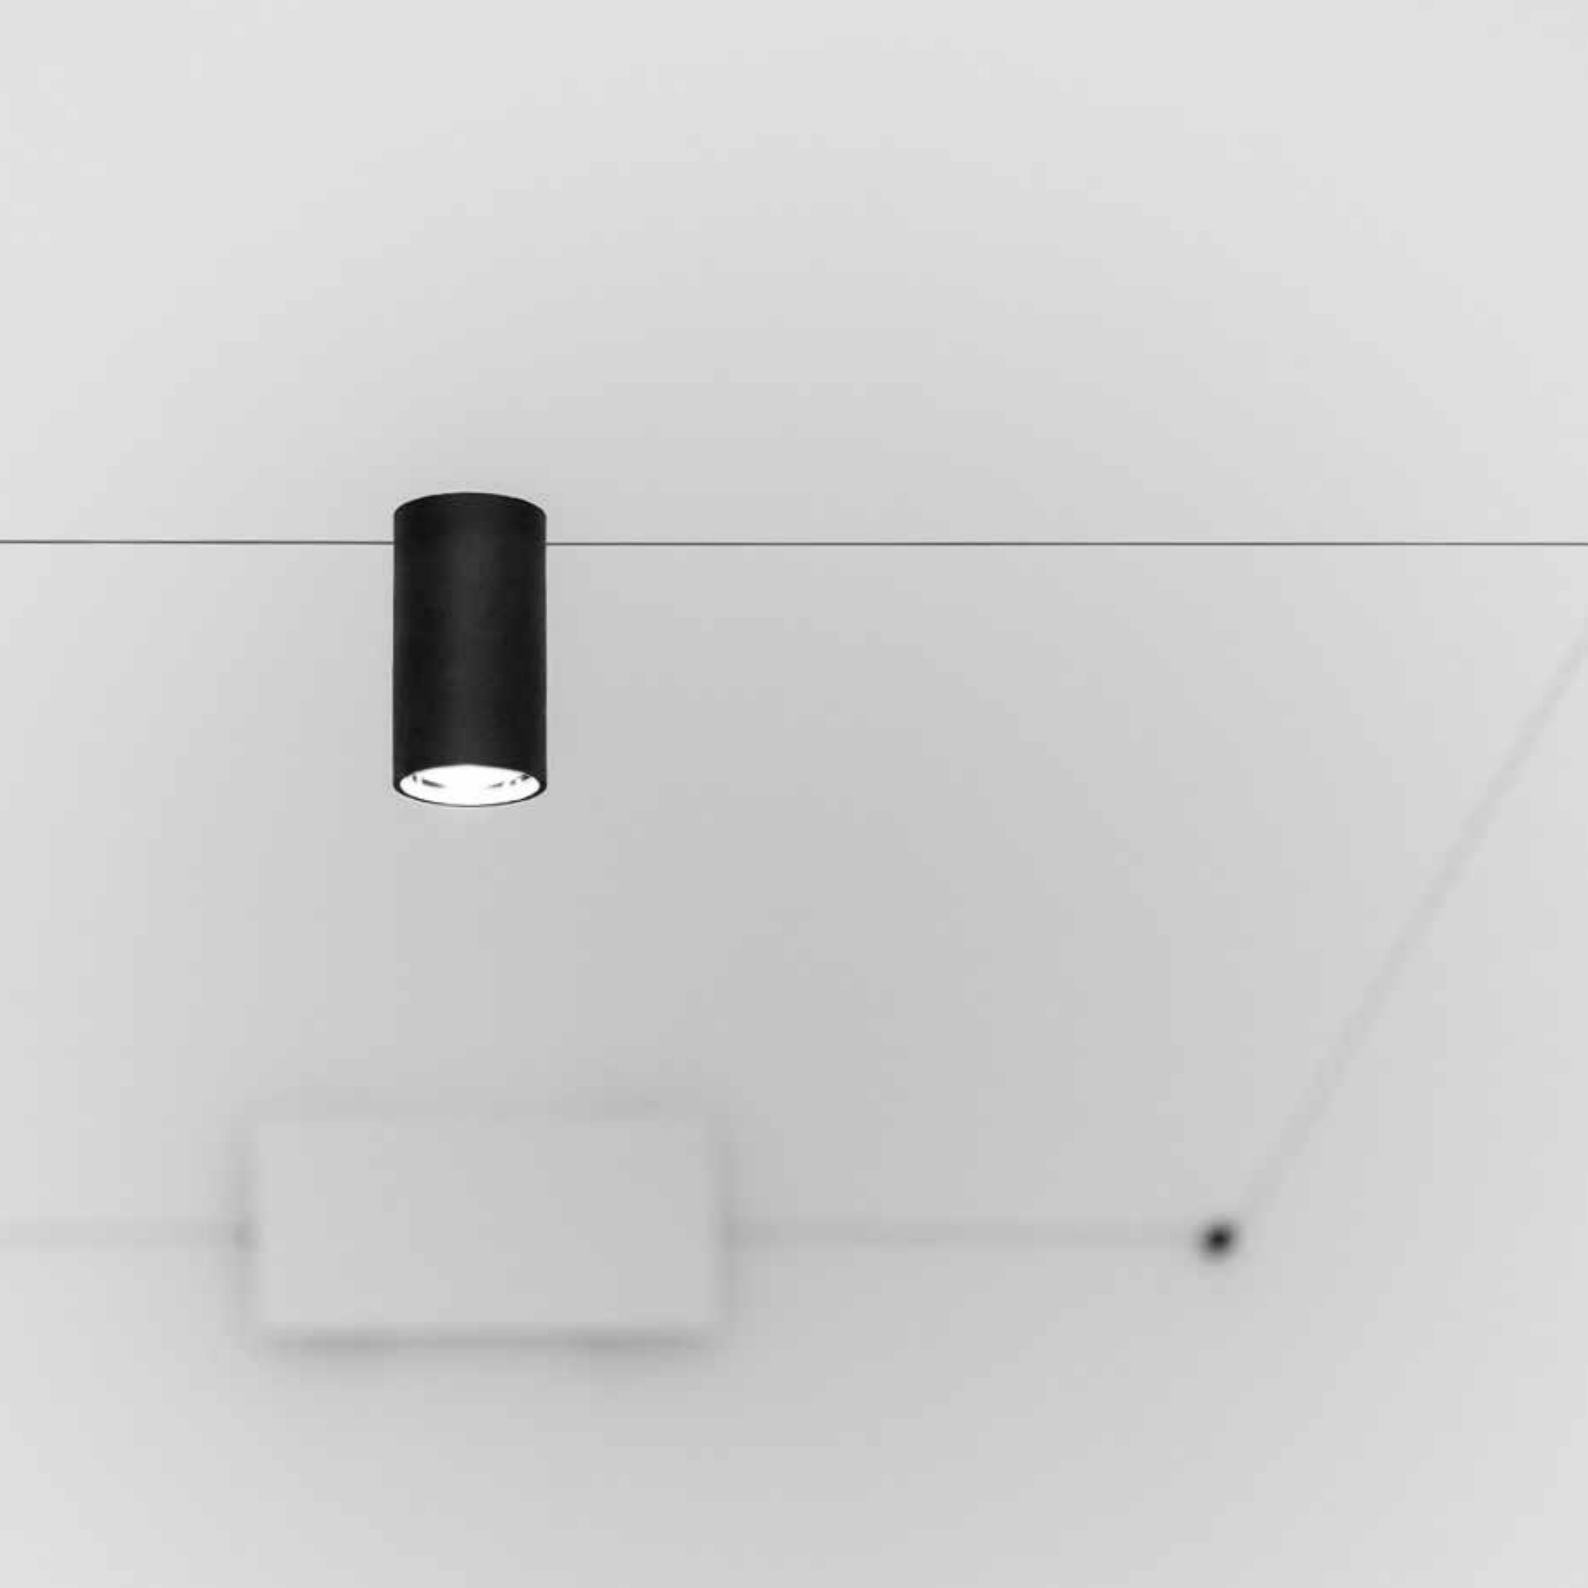




LAYOUT EXAMPLES

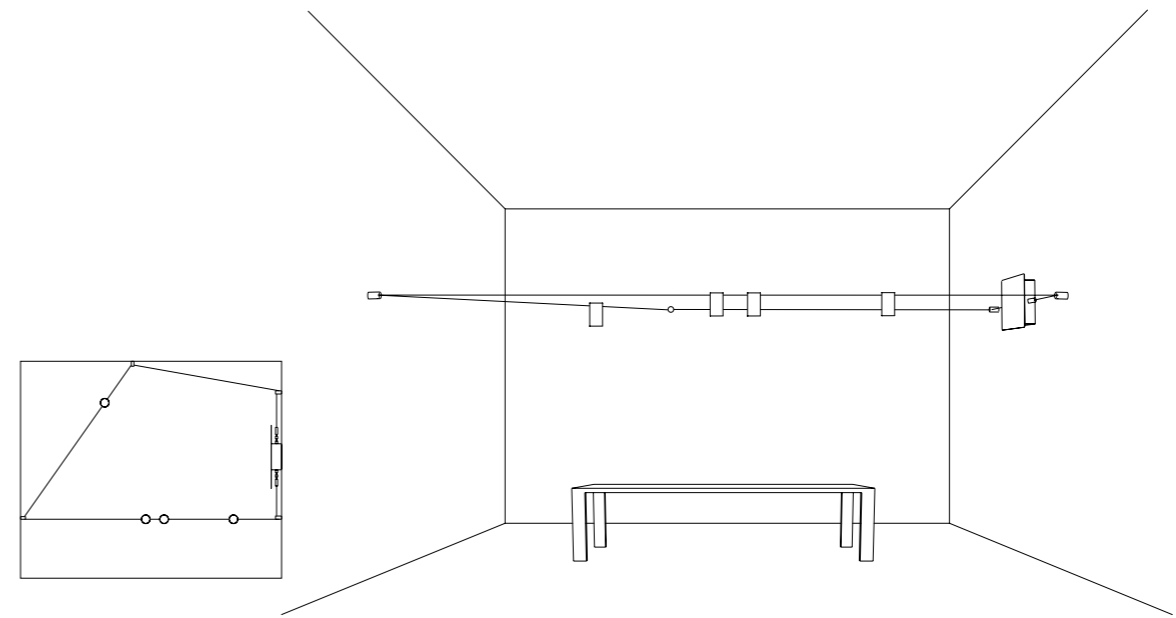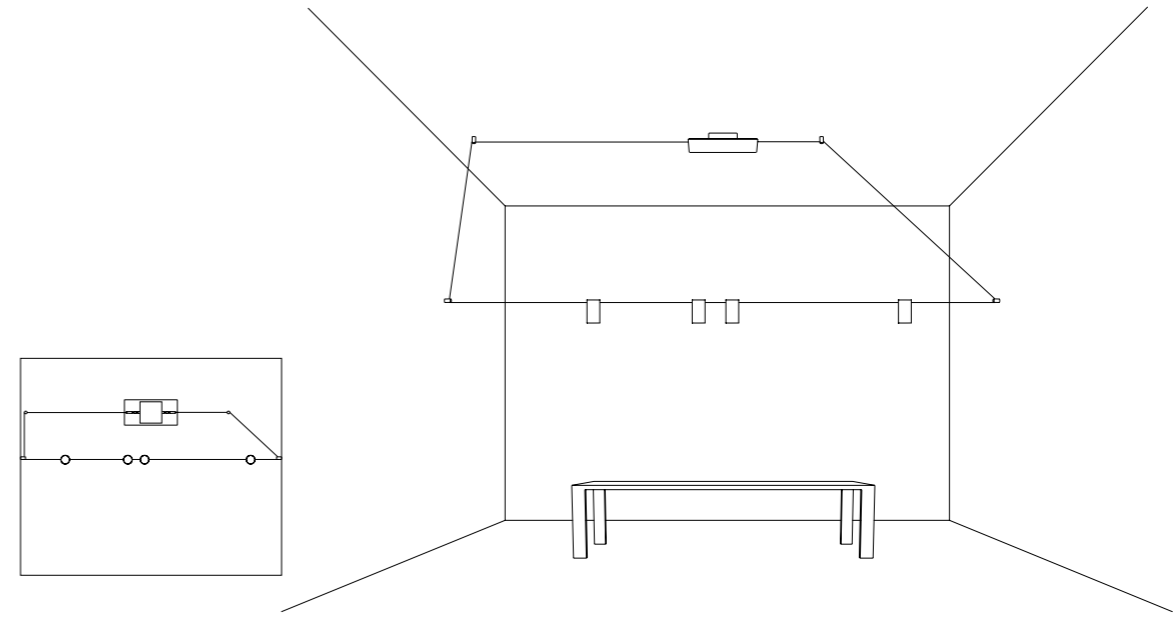

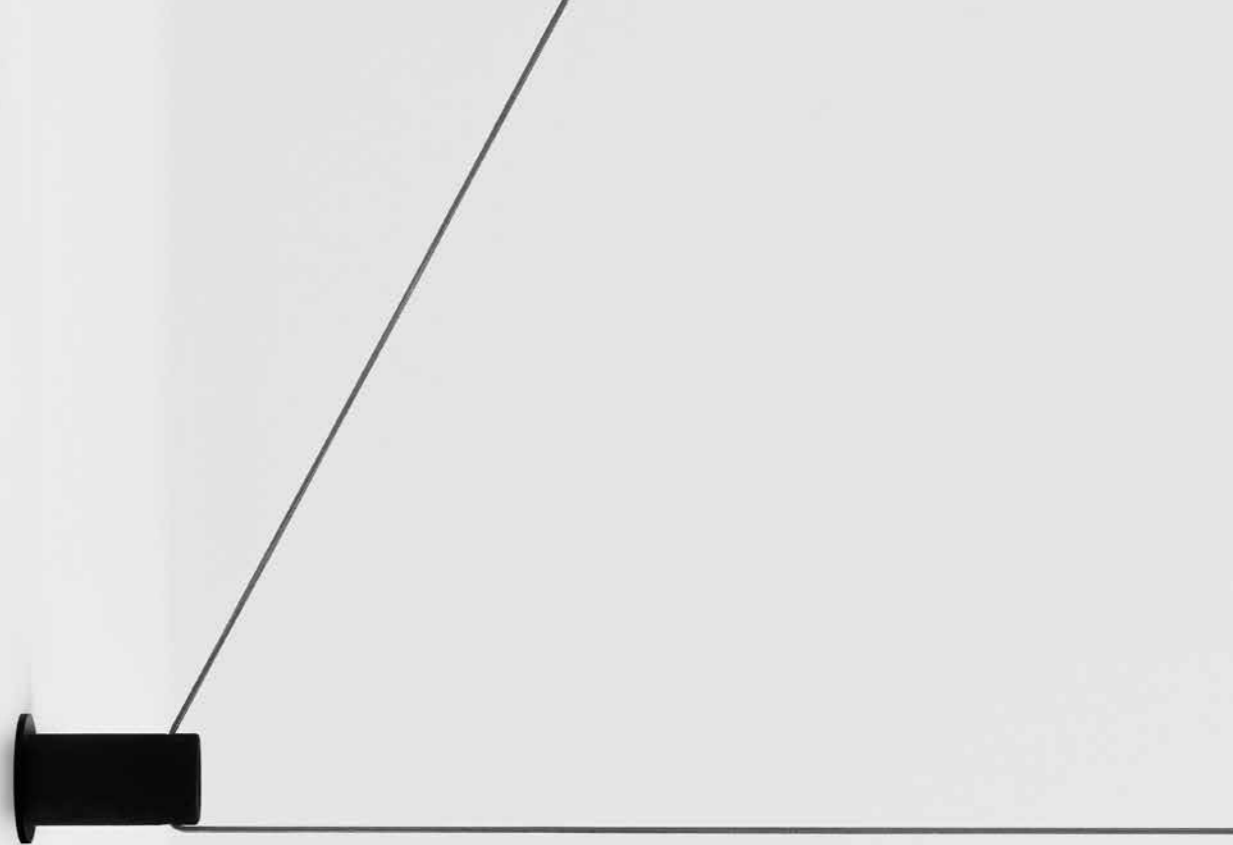


OPTIONAL ACCESSORIES


1A0040403	MATT BLACK - NARROW BEAM - 3000K	SPOT OHM - ADDITIONAL LED MODULE MAX 350 mA DC - 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95 DALI - PUSH - 1-10 V DIMMABLE - MAX 4 SPOT ON UNIPOLAR WIRE	
1A0040403-27	MATT BLACK - NARROW BEAM - 2700K		
1A0740403	MATT BLACK - MEDIUM BEAM - 3000K	SPOT OHM - ADDITIONAL LED MODULE MAX 350 mA DC - 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95 DALI - PUSH - 1-10 V DIMMABLE - MAX 4 SPOT ON UNIPOLAR WIRE	
1A0740403-27	MATT BLACK - MEDIUM BEAM - 2700K		
1A0420403	MATT BLACK	WIRE GUIDE	

PTX MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY - FOR NORTH AMERICA USE ONLY CLASS 2 POWER SUPPLY MAX DA DRT LOCATION ONLY

ENDLESS /

The beating heart of **Sistemi**.
Endless is an adhesive strip, a conductive strip that can be applied to any kind of surface.
Walls, ceilings, or even stairs, furniture, windows and glass, with Endless they become potential light spaces.
The Endless system was designed and patented to bring "potential differences" wherever you want them, creating graphic digital designs. This way current can run anywhere, allowing you to connect more than one luminaire at the same time.
Every space becomes an electronic circuit where light can be positioned with the greatest freedom.
With Endless, one of the greatest dreams of light designers becomes reality: light can be used to draw, create patterns, and engrave the darkness.
Finally freed, light becomes the artist's brush.

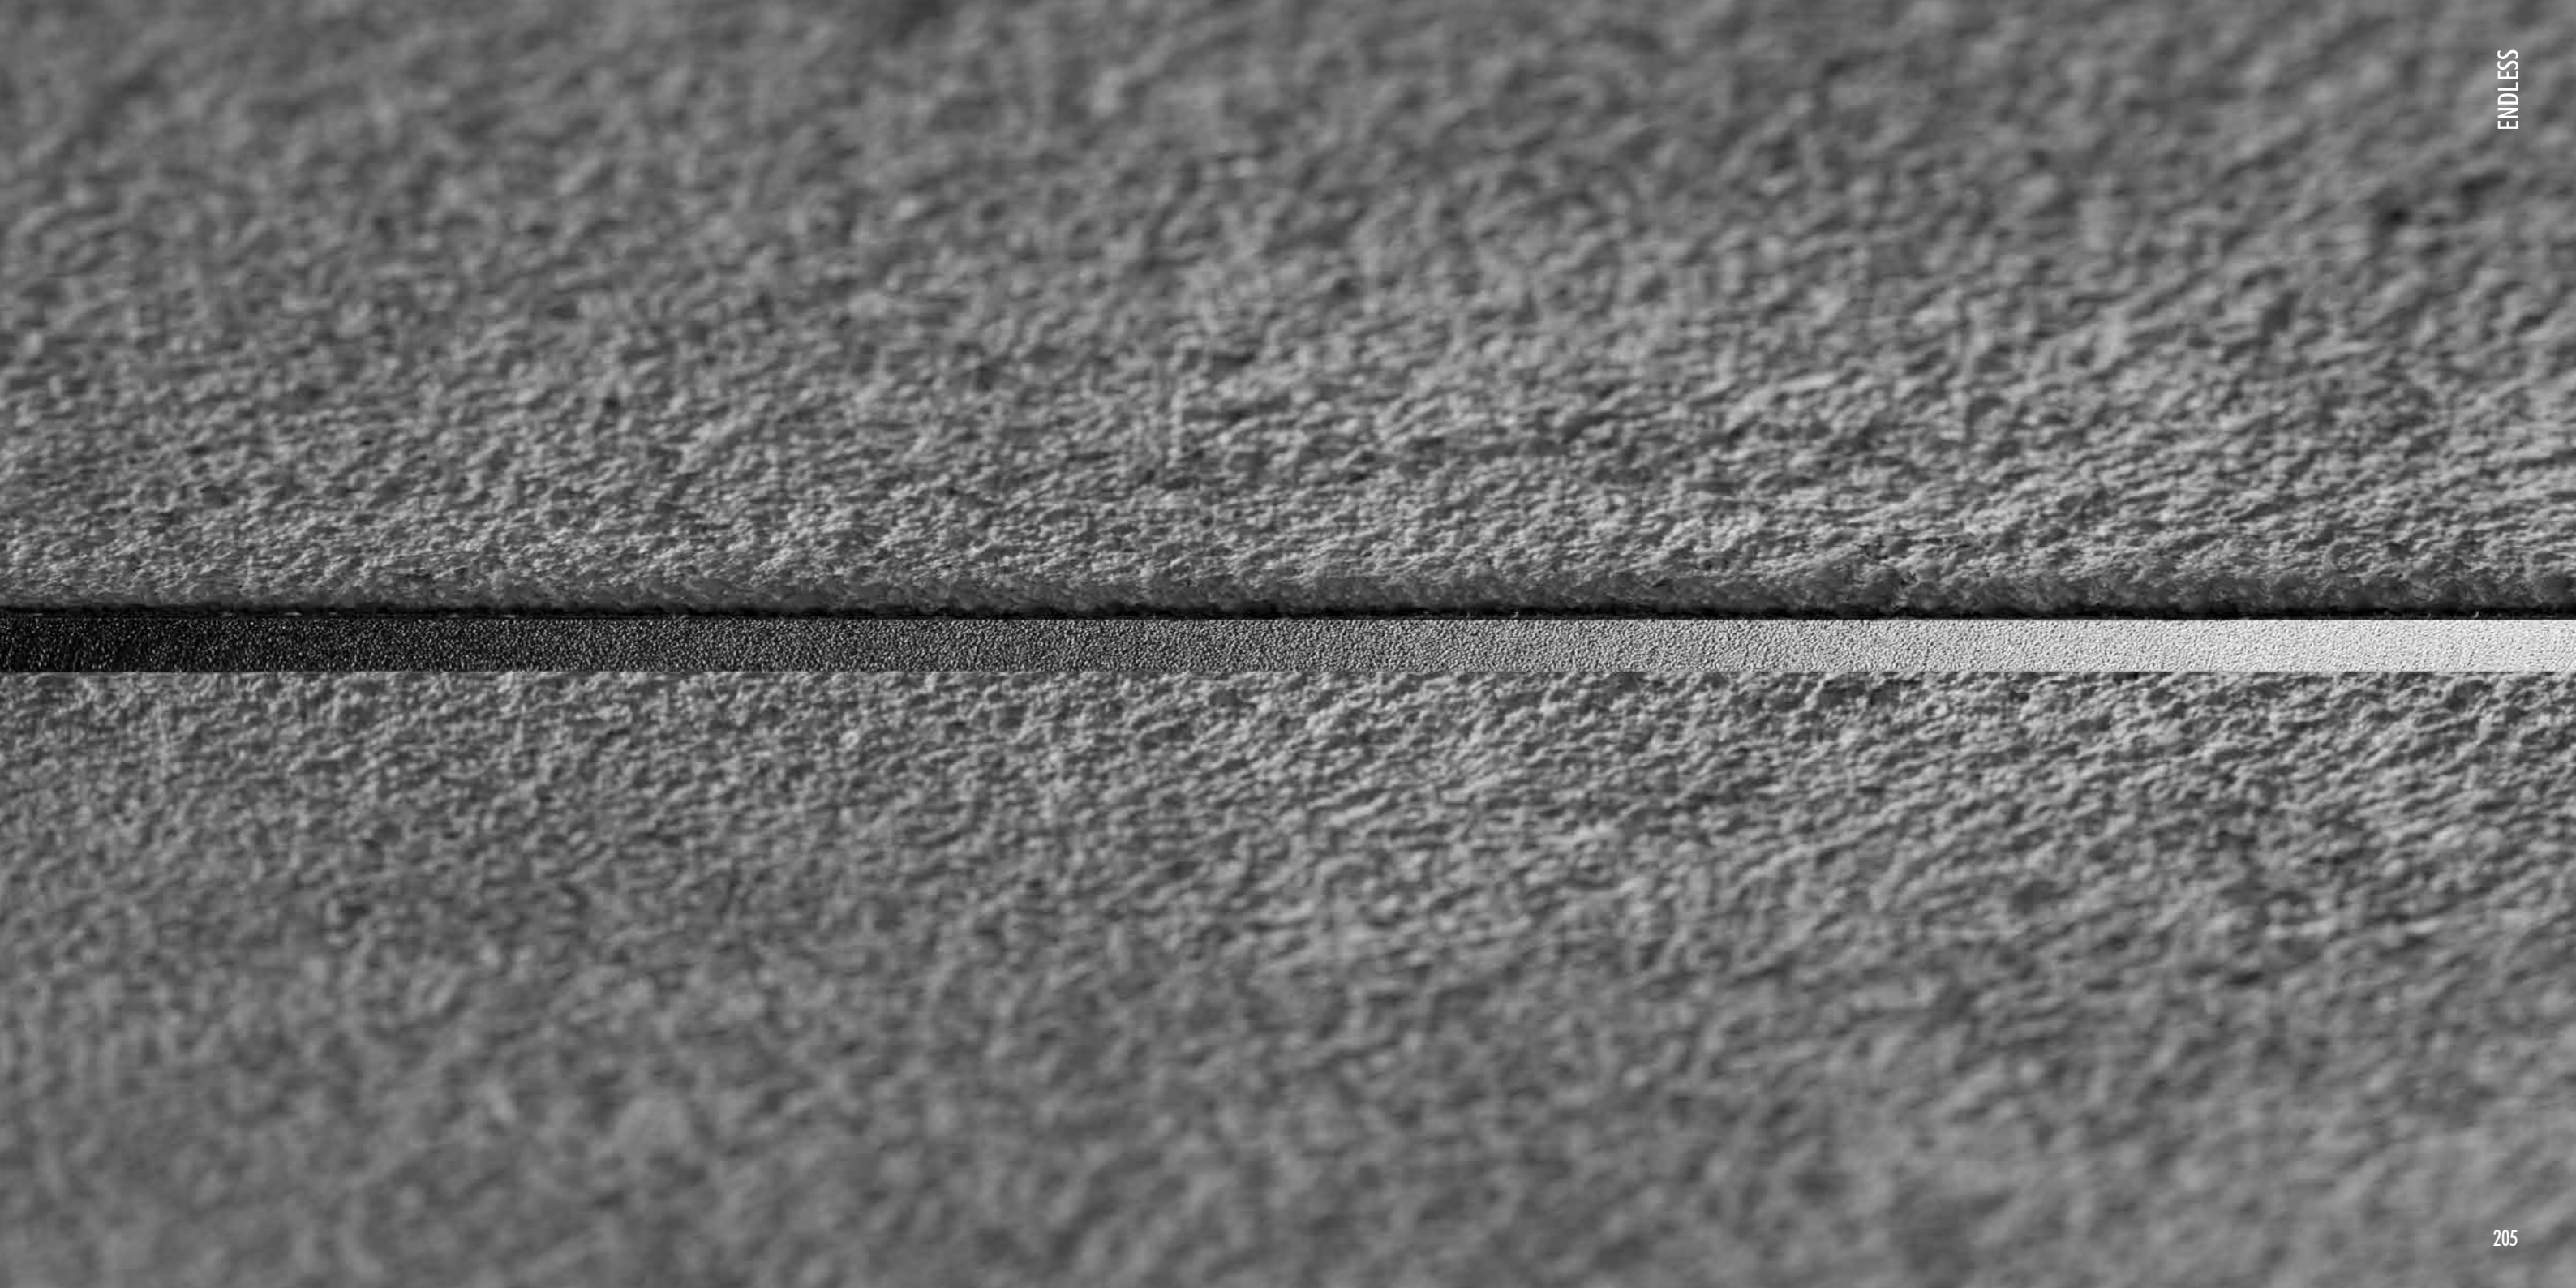

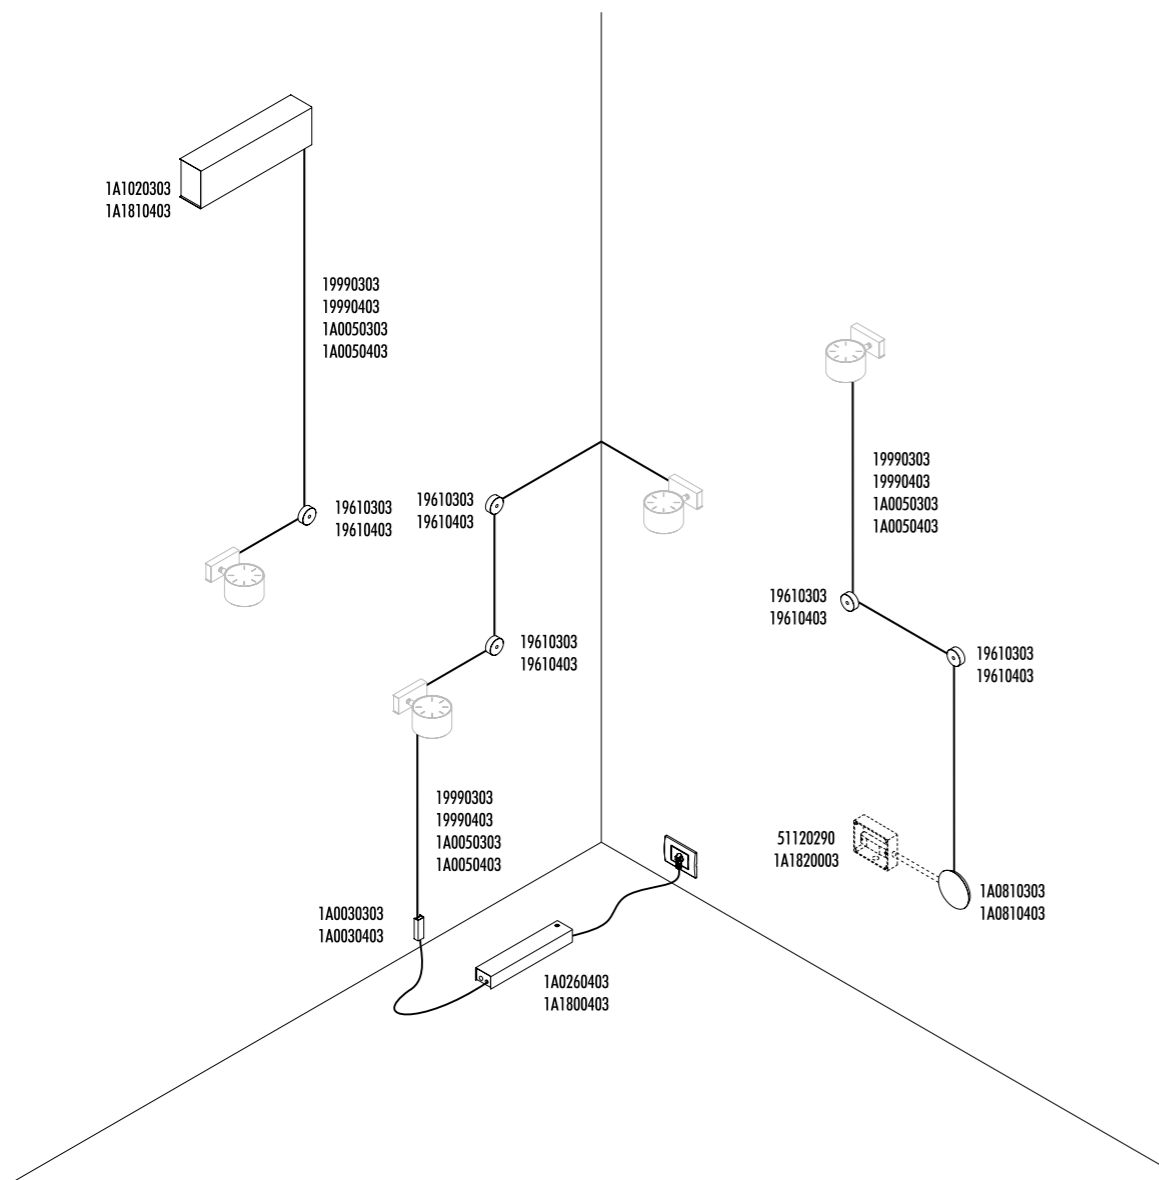

19990303	MATT WHITE - 5 m	ENDLESS - MAX 150 W - MAX 48 V DC - MAX 4 A	
19990403	MATT BLACK - 5 m		
1A0050303	MATT WHITE - 10 m		
1A0050403	MATT BLACK - 10 m		


1A0370003	STANDARD	FIXING ROUGH WALLS - 2,5 m	
-----------	----------	----------------------------	--

19610303	MATT WHITE	TERMINALS BOX WITH 2 TERMINALS INCLUDED	
19610403	MATT BLACK		


1A0030303	MATT WHITE	POWER BASE	
1A0030403	MATT BLACK		

19690003	STANDARD	TERMINALS - 2 PIECES	
----------	----------	----------------------	--


1A0810303	MATT WHITE	POWER BASE - REMOTE VERSION	
1A0810403	MATT BLACK		

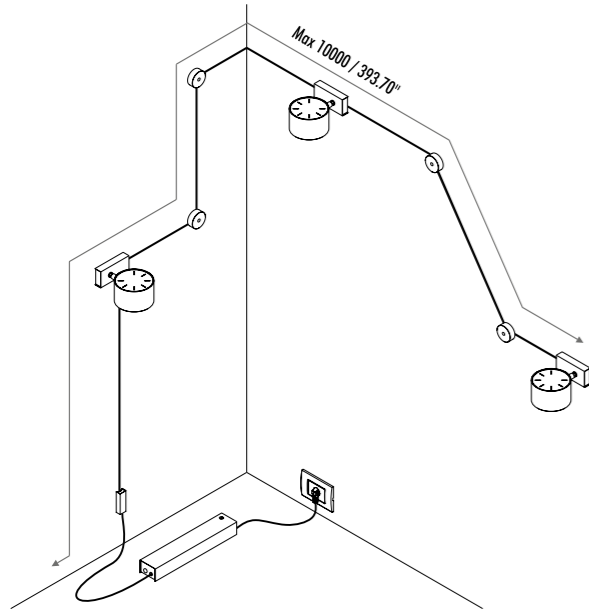

WALL AND CEILING ROSE KIT

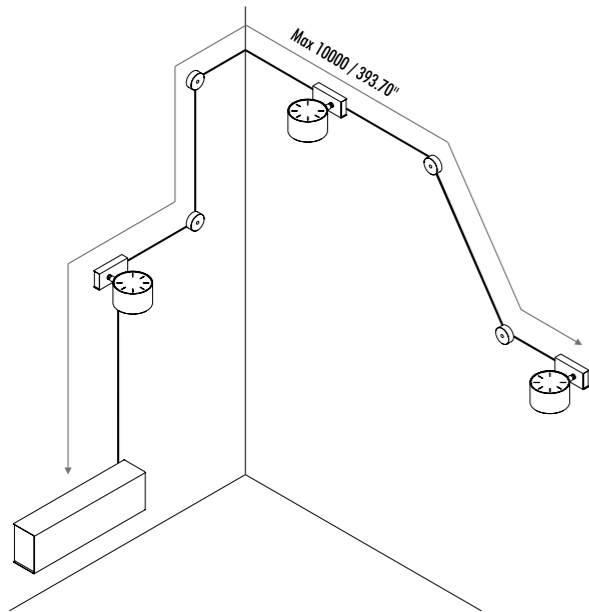

REMOTE POWER SUPPLY KIT

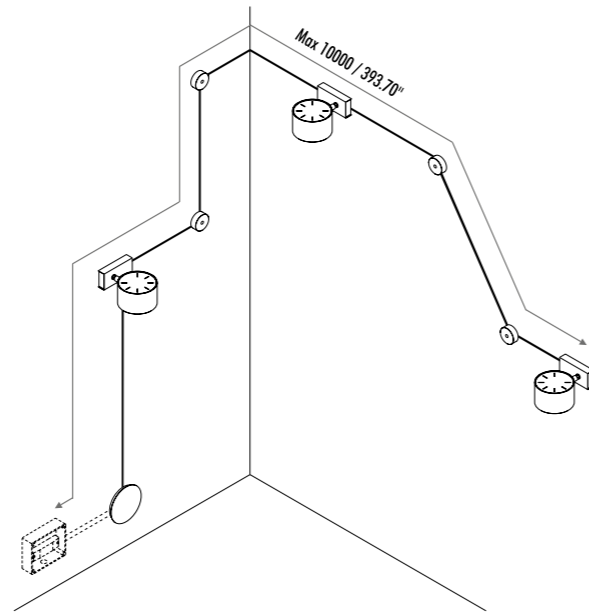




COMPULSORY POWER SUPPLY FOR ENDLESS ON/OFF SYSTEM - SPOT ENDLESS IOT - DOT ENDLESS IOT

1A0260403	MATT BLACK	POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W NOT DIMMABLE	
1A1020303	MATT WHITE	WALL AND CEILING ROSE KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 NOT DIMMABLE	
5T120290	STANDARD	REMOTE POWER SUPPLY KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 NOT DIMMABLE	

COMPULSORY POWER SUPPLY FOR DIMMING SPOT ENDLESS AND DOT ENDLESS

1A1800403	MATT BLACK	POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W DIMMABLE	
1A1810303	MATT WHITE	WALL AND CEILING ROSE KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 DALI - PUSH - 0/1-10 V DIMMABLE	
1A1820003	STANDARD + CONTROLLER LED	REMOTE POWER SUPPLY KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 CONTROLLER LED - DALI - PUSH - 0/1-10 V DIMMABLE	

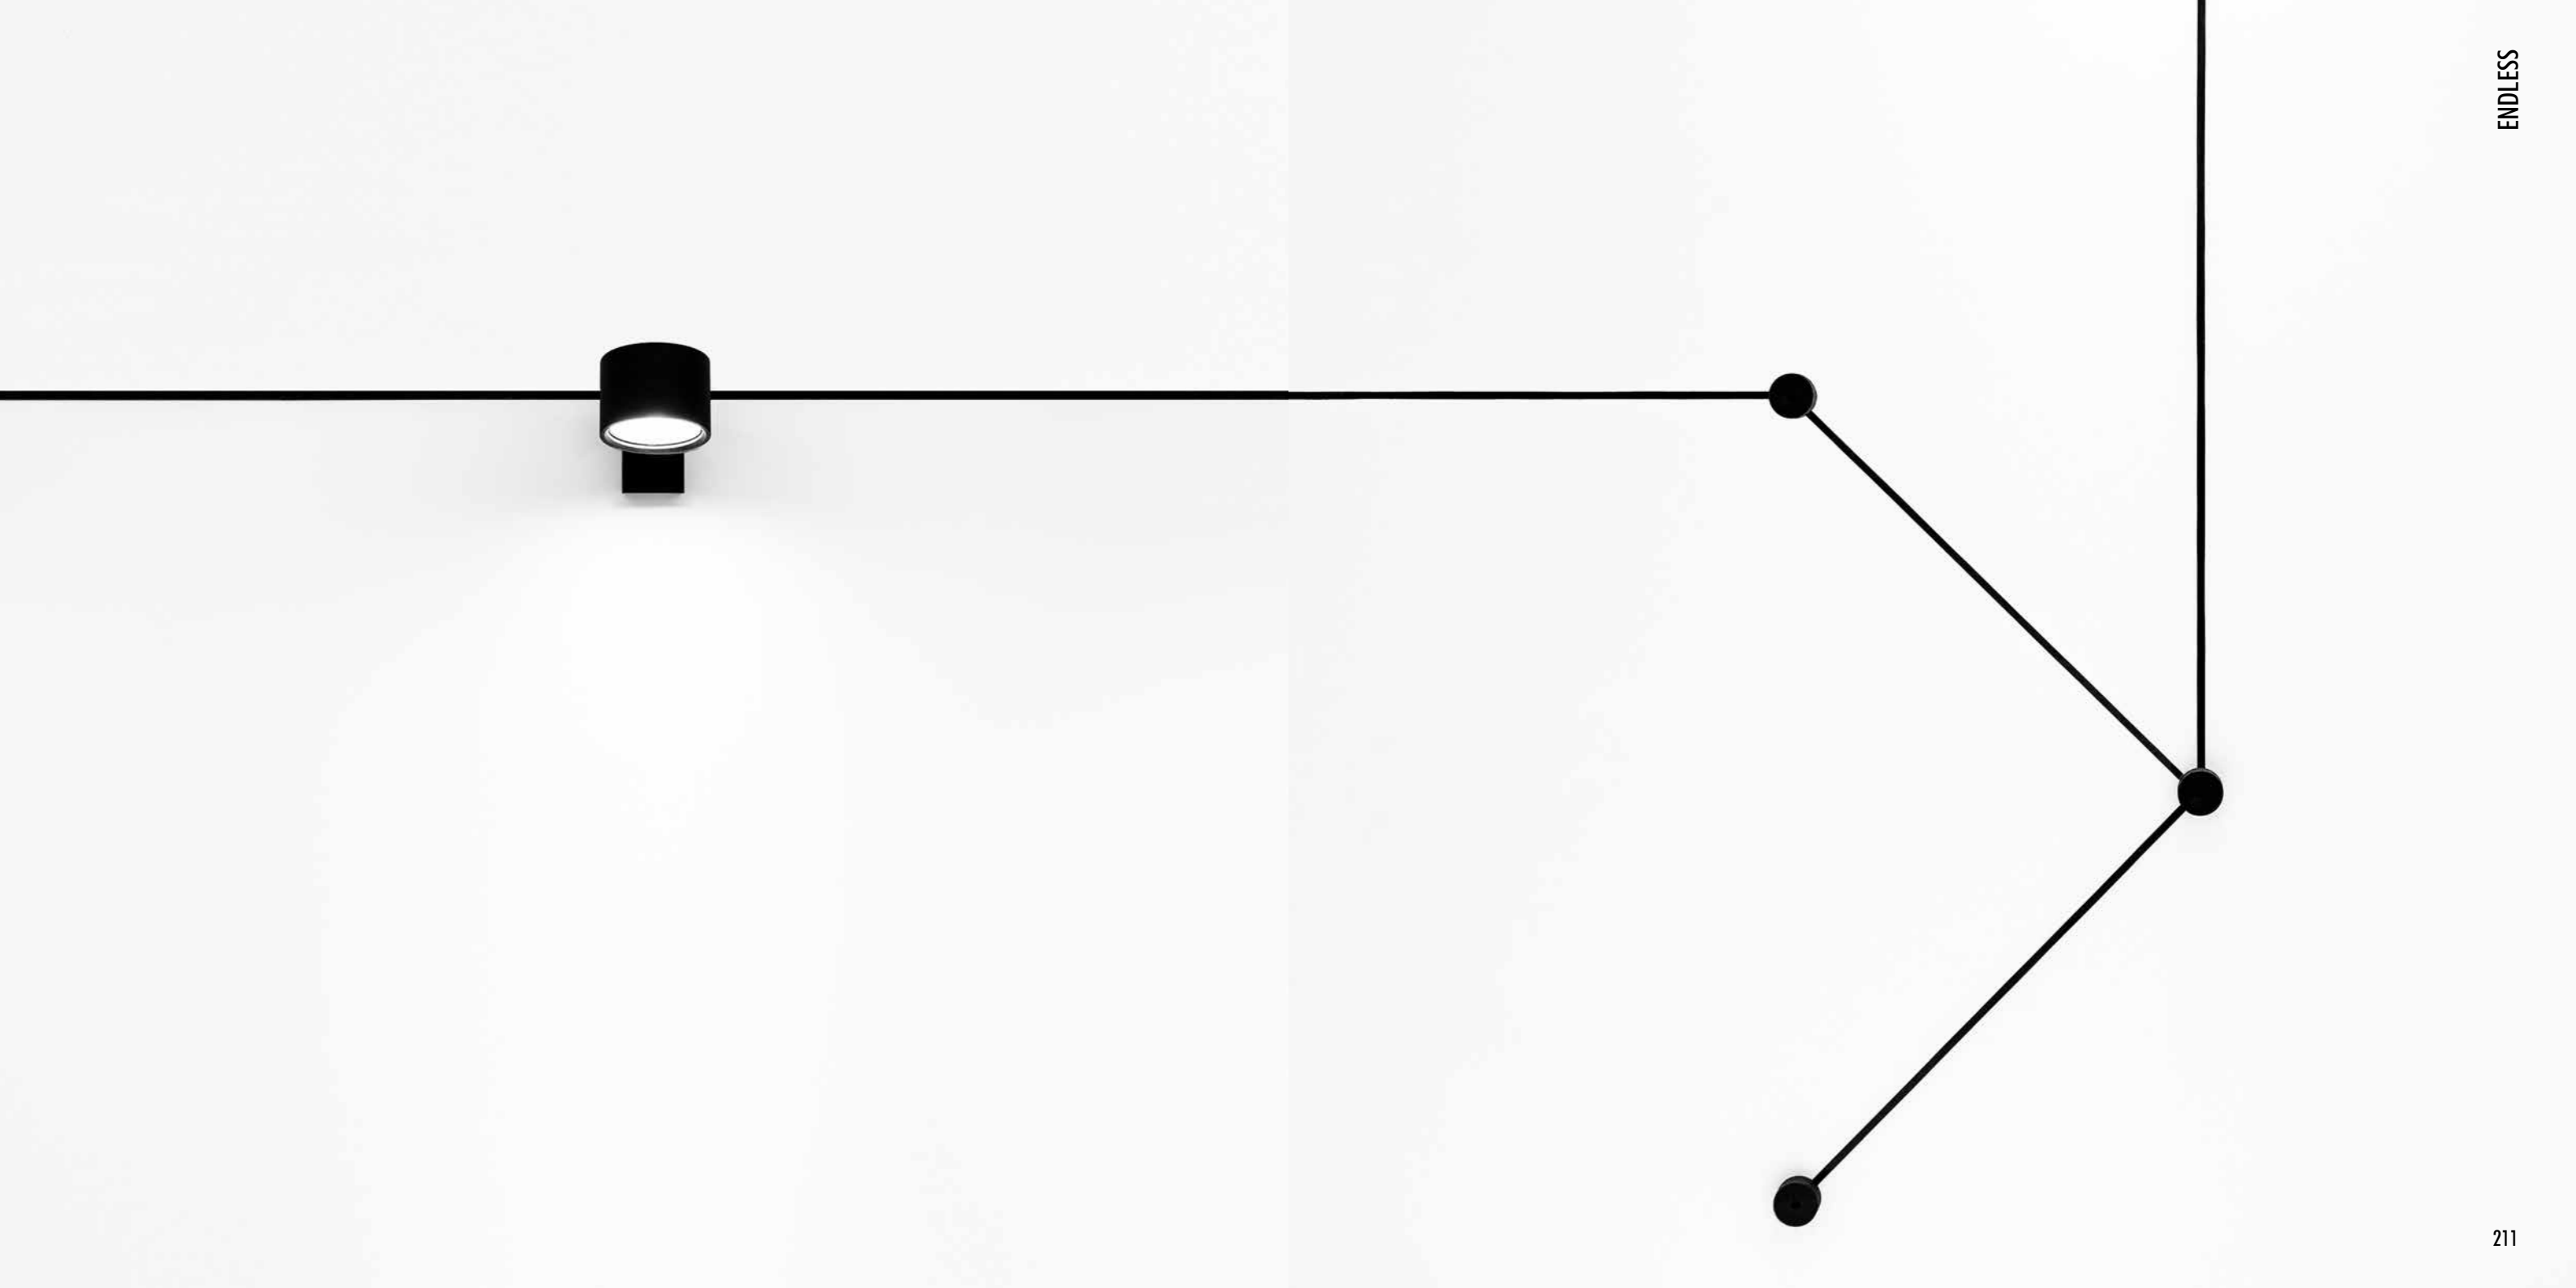

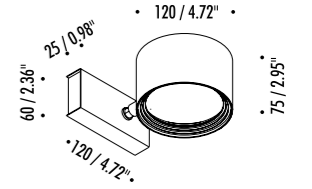

1A1070303	MATT WHITE	48 V DC - MAX 12,6 W LED MAX 5 SPOT ON ENDLESS COMPULSORY POWER SUPPLY KIT NOT INCLUDED - SEE PAGE 207-209 LED MODULE NOT INCLUDED OPTIONAL LED MODULE ACCESSORIES
1A1070403	MATT BLACK	

COMPULSORY ACCESSORIES

50041500	LED MODULE 15° SPOT	12,6 W LED (350 mA) - 15° - 3000K - 1350 lm - CRI 90 - DIMMABLE
50041510	LED MODULE 15° SPOT	12,6 W LED (350 mA) - 15° - 2700K - 1269 lm - CRI 90 - DIMMABLE
50041350	LED MODULE 24° SPOT	12,6 W LED (350 mA) - 24° - 3000K - 1361 lm - CRI 90 - DIMMABLE
50041450	LED MODULE 24° SPOT	12,6 W LED (350 mA) - 24° - 2700K - 1281 lm - CRI 90 - DIMMABLE



OPTIONAL ACCESSORIES

1A1210003	STANDARD	DARKLIGHT
-----------	----------	-----------



DESIGN DAVIDE GROPPI - 2018
WALL AND CEILING LAMP - METAL

SPOT ENDLESS IOT

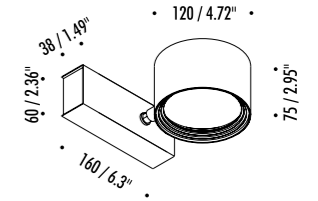




1A1080303	MATT WHITE	48 V DC - MAX 12,6 W LED MAX 5 SPOT ON ENDLESS DIMMABLE WIRELESS CONTROL ONLY WITH DEDICATED APP by DAVIDE GROPPI - SEE PAGE 221 COMPULSORY POWER SUPPLY KIT NOT INCLUDED - SEE PAGE 207-209 LED MODULE NOT INCLUDED OPTIONAL LED MODULE ACCESSORIES
1A1080403	MATT BLACK	

COMPULSORY ACCESSORIES

50041500	LED MODULE 15° SPOT	12,6 W LED (350 mA) - 15° - 3000K - 1350 lm - CRI 90 - DIMMABLE
50041510	LED MODULE 15° SPOT	12,6 W LED (350 mA) - 15° - 2700K - 1269 lm - CRI 90 - DIMMABLE
50041350	LED MODULE 24° SPOT	12,6 W LED (350 mA) - 24° - 3000K - 1361 lm - CRI 90 - DIMMABLE
50041450	LED MODULE 24° SPOT	12,6 W LED (350 mA) - 24° - 2700K - 1281 lm - CRI 90 - DIMMABLE

OPTIONAL ACCESSORIES

1A1210003	STANDARD	DARKLIGHT
-----------	----------	-----------

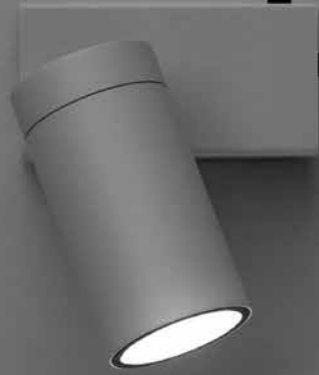

1A0330303	MATT WHITE - 3000K	48 V DC - MAX 12,6 W LED 3000K - 930 lm - CRI 97 / 2700K - 880 lm - CRI 97 MAX 5 DOT ON ENDLESS COMPULSORY POWER SUPPLY KIT NOT INCLUDED - SEE PAGE 207-209 COMPULSORY ACCESSORIES NOT INCLUDED
1A0330303-27	MATT WHITE - 2700K	
1A0330403	MATT BLACK - 3000K	
1A0330403-27	MATT BLACK - 2700K	



COMPULSORY ACCESSORIES

1A1640003	LENS NARROW BEAM	DOT ENDLESS LENS
1A1650003	LENS MEDIUM BEAM	



DESIGN DAVIDE GROPPI - 2020
WALL AND CEILING LAMP - METAL


DOT ENDLESS IOT




1A1460303	MATT WHITE - 3000K	48 V DC - MAX 12,6 W LED
1A1460303-27	MATT WHITE - 2700K	3000K - 930 lm - CRI 97 / 2700K - 880 lm - CRI 97
1A1460403	MATT BLACK - 3000K	MAX 5 DOT ON ENDLESS
1A1460403-27	MATT BLACK - 2700K	DIMMABLE WIRELESS CONTROL ONLY WITH DEDICATED APP by DAVIDE GROPPI - SEE PAGE 221
		COMPULSORY POWER SUPPLY KIT NOT INCLUDED - SEE PAGE 207-209
		COMPULSORY ACCESSORIES NOT INCLUDED

COMPULSORY ACCESSORIES


1A1640003	LENS NARROW BEAM	DOT ENDLESS LENS
1A1650003	LENS MEDIUM BEAM	




NETWORK



GROUPS



DYNAMIC SCENES

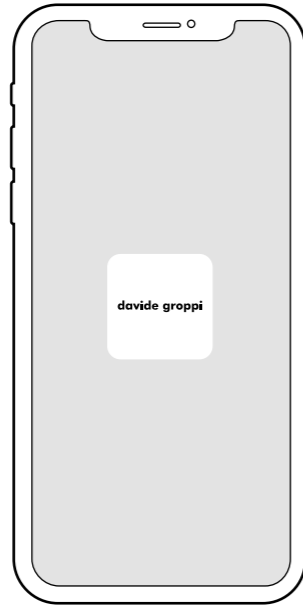

DISCOVER





davide groppi IOT

C O N T R O L A P P





CEILING ROSE

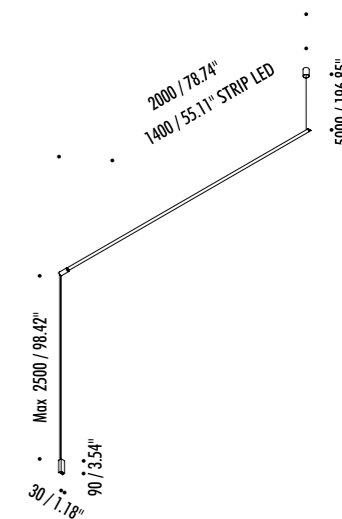

1A0680403	MATT BLACK - 3000K	MERIDIANA - REMOTE KIT 24 V DC - 40 W LED - 1623 lm - CRI > 90
1A0680403-27	MATT BLACK - 2700K	WHITE CEILING ROSE - COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 207
		INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DALI - PUSH - Q/1-10 V - TRIAC / IGBT DIMMABLE

1A0690403	MATT BLACK - 3000K	MERIDIANA - PLUG KIT 24 V DC - 40 W LED - 1623 lm - CRI > 90
1A0690403-27	MATT BLACK - 2700K	WHITE CEILING ROSE - COMPULSORY POWER SUPPLY KIT INCLUDED - SEE PAGE 207
		INCLUDES LED DRIVER INPUT 120 V - 60 Hz - DIMMABLE


OPTIONAL ACCESORIES

1A0370003	STANDARD	FIXING ROUGH WALLS - 2,5 m
-----------	----------	----------------------------




1A0530003	STANDARD	SLOPED CEILING FIXING HOOK SEE PAGE 101
-----------	----------	--



REMOTE POWER SUPPLY KIT

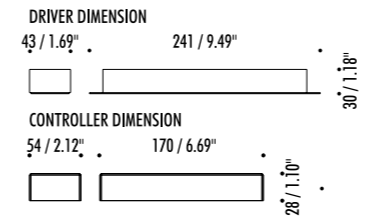


POWER SUPPLY KIT WITH PLUG

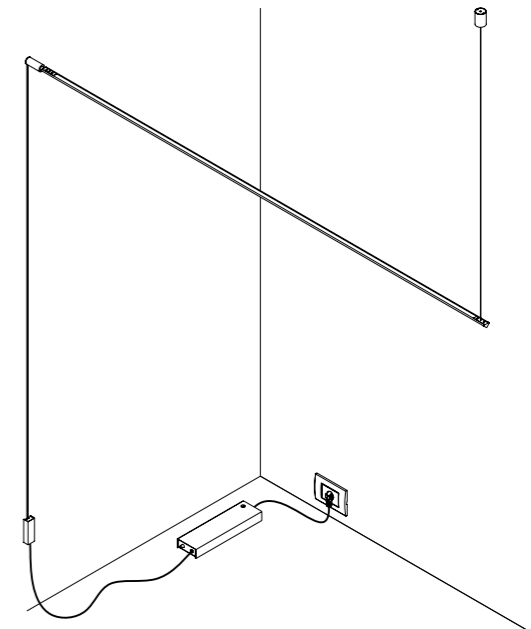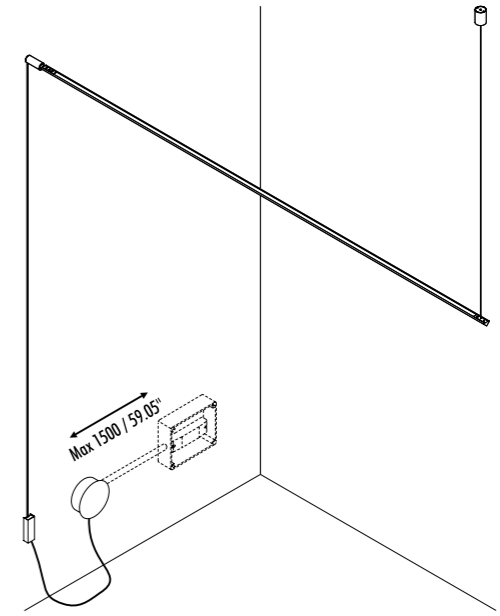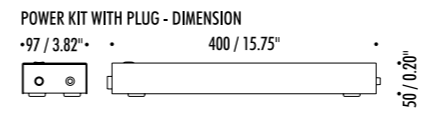

DESIGN 2014
 CEILING LAMP - METAL
 EUTRAC - cULus CERTIFICATION


IP 20

39310010	TRACK 4 ft WHITE	SURFACE TRACK SYSTEM - 120 V
39310040	TRACK 4 ft BLACK	
39310020	TRACK 8 ft WHITE	
39310050	TRACK 8 ft BLACK	



COMPULSORY INSTALLATION KITS

39310070	MATT WHITE	POWER RIGHT CONNECTOR - 120 V
39310080	MATT BLACK	
39310090	MATT WHITE	POWER LEFT CONNECTOR - 120 V
39310100	MATT BLACK	



36360190	MATT WHITE	END CAP
36360200	MATT BLACK	



OPTIONAL INSTALLATION KITS


36360220	MATT WHITE	LINEAR CONNECTOR - 120 V
36360230	MATT BLACK	




39310110	MATT WHITE	INTERNAL L CONNECTOR - 120 V
39310120	MATT BLACK	
39310130	MATT WHITE	EXTERNAL L CONNECTOR - 120 V
39310140	MATT BLACK	




39310170	MATT WHITE	RIGHT T CONNECTOR - 120 V
39310180	MATT BLACK	
39310190	MATT WHITE	LEFT T CONNECTOR - 120 V
39310200	MATT BLACK	



39310210	MATT WHITE	X CONNECTOR - 120 V
39310220	MATT BLACK	





36360440	STANDARD H. 1500 mm	ADJUSTABLE SUSPENSION CABLE KIT TO BUY TOGETHER WITH 36360470 OR 36360480
36360450	STANDARD H. 3000 mm	
36360460	STANDARD H. 6200 mm	



36360470	MATT WHITE	SUSPENSION COUPLER
36360480	MATT BLACK	





17830303	MATT WHITE	120 V - 60 Hz - MAX 10 W LED - GU10 COMPULSORY INSTALLATION KIT NOT INCLUDED - SEE PAGE 227 ADJUSTABLE - BULB NOT INCLUDED
17830403	MATT BLACK	

RECESSED





Compasso d'Oro ADI
Award 2014

DESIGN DAVIDE GROPPI - 2010
RECESSED CEILING LAMP - METAL



NULLA

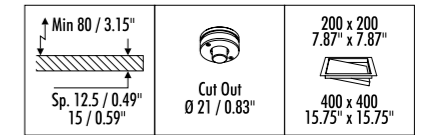

19160003	STANDARD - 3000K	MAX 1050 mA DC - 12 W LED - 530 lm - CRI > 90 VISIBLE HOLE Ø 18 mm - COMPULSORY INSTALLATION KIT NOT INCLUDED INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz DALI - PUSH - 1-10 V DIMMABLE
19160003-27	STANDARD - 2700K	

COMPULSORY INSTALLATION KITS







16530403	MATT BLACK	PLASTERBOARD FLANGE 12,5 mm PLASTERBOARD CUT-OUT Ø 21 mm - MINIMUM SPACE FOR MOUNTING 75 mm
17430403	MATT BLACK - IP65	PLASTERBOARD FLANGE 12,5/15 mm PLASTERBOARD CUT-OUT Ø 21 mm - MINIMUM SPACE FOR MOUNTING 75 mm

OPTIONAL INSTALLATION KITS

16420003	STANDARD 200 x 200 mm	PLASTERBOARD PANEL 12,5 mm - PLASTERBOARD CUT-OUT 200 x 200 mm / 400 x 400 mm
16690003	STANDARD 400 x 400 mm	



DRIVER DIMENSION

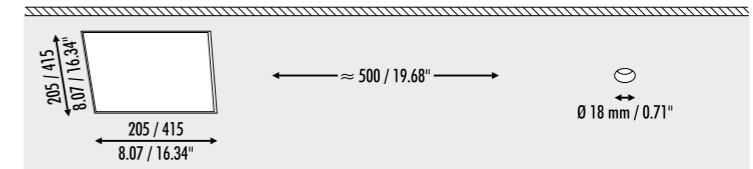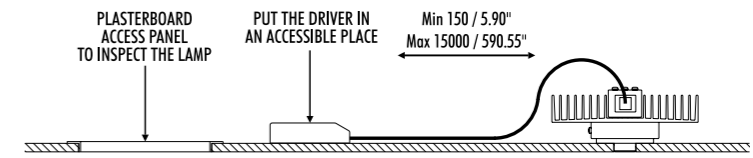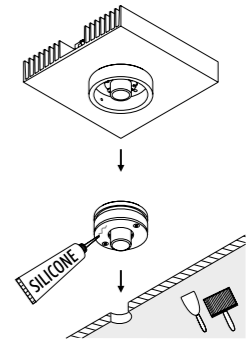







DESIGN DAVIDE GROPPI - 2015
RECESSED CEILING LAMP - METAL

NULLA 25



IP 20/IP 65

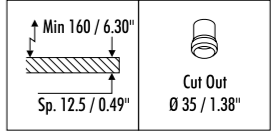

1A0540003	STANDARD DIM PUSH - 1-10 V - 3000K	24 V DC - 6 W LED - 392 lm - CRI > 90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED - SEE PAGE 243 INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE
1A0540003-27	STANDARD DIM PUSH - 1-10 V - 2700K	
1A0550003	STANDARD DIM DALI - 3000K	24 V DC - 6 W LED - 392 lm - CRI > 90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED - SEE PAGE 243 INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
1A0550003-27	STANDARD DIM DALI - 2700K	
1A0560003	STANDARD DIM TRIAC - 3000K	24 V DC - 6 W LED - 392 lm - CRI > 90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED - SEE PAGE 243 INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - TRIAC / IGBT DIMMABLE
1A0560003-27	STANDARD DIM TRIAC - 2700K	





DESIGN DAVIDE GROPPI - 2019
RECESSED CEILING LAMP - METAL



IP 20/IP 65


NULLA 25 T24

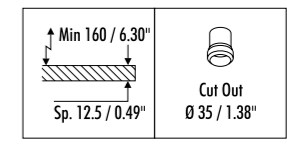

1A1010003	STANDARD TITLE 24	MAX 500 mA DC - 5,6 W LED - 357 lm - 3000K - CRI > 90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED - SEE PAGE 243 DRIVER LED NOT INCLUDED (PER MIN 2 UNIT - MAX 4 UNIT)
-----------	-------------------	---


COMPULSORY INSTALLATION KITS

52000010	STANDARD TITLE 24	DRIVER LED (PER MIN 2 UNIT - MAX 4 UNIT) INPUT 120-250 V - 50/60 Hz - OUTPUT 500 mA DC - 50 W - IP20 1-10 V DIMMABLE
----------	-------------------	--

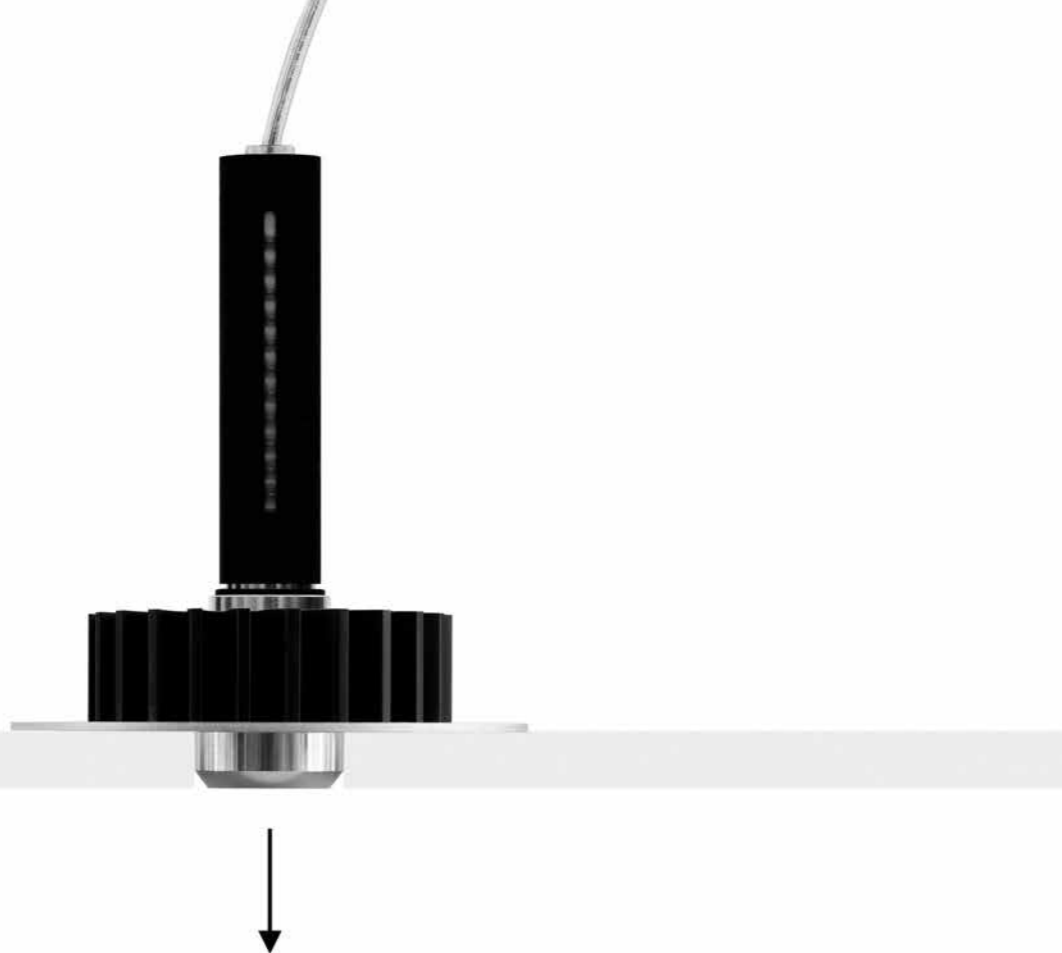


LUMINAIRE REMOVABLE FOR MAINTENANCE


DIM 1 - 10 V - PUSH
DRIVER DIMENSION




DIM DALI
DRIVER DIMENSION






DIM TRIAC
DRIVER DIMENSION






DIM 1 - 10 V - T24
DRIVER DIMENSION



CONTROLLER DIMENSION






PUT THE DRIVER IN
AN ACCESSIBLE PLACE



IP 20
IP 65

COMPULSORY INSTALLATION KITS

18250003	STANDARD	PLASTERBOARD FLANGE 12,5 mm PLASTERBOARD CUT-OUT Ø 35 mm MINIMUM SPACE FOR MOUNTING 160 mm

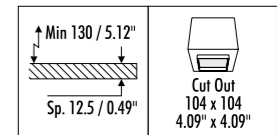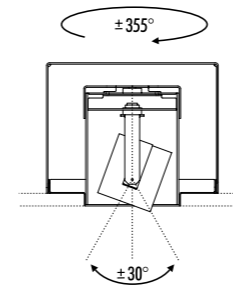




19620303	MATT WHITE - 3000K	MAX 400 mA DC - MAX 12 W LED - 589 lm - CRI > 95 COMPULSORY INSTALLATION KIT NOT INCLUDED ADJUSTABLE - OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - 1-10 V - PUSH DIMMABLE
19620303-27	MATT WHITE - 2700K	
19620403	MATT BLACK - 3000K	
19620403-27	MATT BLACK - 2700K	
19090303	MATT WHITE - 3000K	MAX 400 mA DC - MAX 12 W LED - 589 lm - CRI > 95 COMPULSORY INSTALLATION KIT NOT INCLUDED ADJUSTABLE - OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
19090303-27	MATT WHITE - 2700K	
19090403	MATT BLACK - 3000K	
19090403-27	MATT BLACK - 2700K	

COMPULSORY INSTALLATION KITS

18420303	MATT WHITE	PLASTERBOARD FRAME 12,5 mm
18420403	MATT BLACK	PLASTERBOARD CUT-OUT 104 x 104 mm MINIMUM SPACE FOR MOUNTING 130 mm

"POINT SOURCE OPTICS" OPTIONAL LED MODULE ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS



5158002	STANDARD	FILTER - MR16 - 25°
5158003	STANDARD	FILTER - MR16 - 36°
5158004	STANDARD	DARKLIGHT - MR16

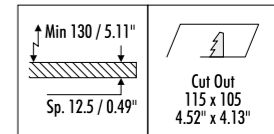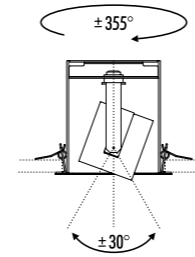

19630303	MATT WHITE - 3000K	MAX 400 mA DC - 12 W LED - 589 lm - CRI > 95 PLASTERBOARD CUT-OUT 115 x 105 mm MINIMUM SPACE FOR MOUNTING 130 mm ADJUSTABLE - OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE
19630303-27	MATT WHITE - 2700K	
19633403	MATT WHITE - BLACK BICOLOUR - 3000K	
19633403-27	MATT WHITE - BLACK BICOLOUR - 2700K	
19100303	MATT WHITE - 3000K	MAX 400 mA DC - 12 W LED - 589 lm - CRI > 95 PLASTERBOARD CUT-OUT 115 x 105 mm MINIMUM SPACE FOR MOUNTING 130 mm ADJUSTABLE - OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
19100303-27	MATT WHITE - 2700K	
19103403	MATT WHITE - BLACK BICOLOUR - 3000K	
19103403-27	MATT WHITE - BLACK BICOLOUR - 2700K	

"POINT SOURCE OPTICS" OPTIONAL LED MODULE ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS


5158002	STANDARD	FILTER - MR16 - 25°
5158003	STANDARD	FILTER - MR16 - 36°
5158004	STANDARD	DARKLIGHT - MR16

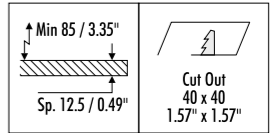

17290303	MATT WHITE - 3000K	MAX 500 mA DC - 5,6 W LED - 352 lm - CRI > 90 PLASTERBOARD CUT-OUT 40 x 40 mm MINIMUM SPACE FOR MOUNTING 85 mm ADJUSTABLE INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - NOT DIMMABLE
17290303-27	MATT WHITE - 2700K	
17290403	MATT BLACK - 3000K	
17290403-27	MATT BLACK - 2700K	



48 / 1.89"
58 / 2.28"

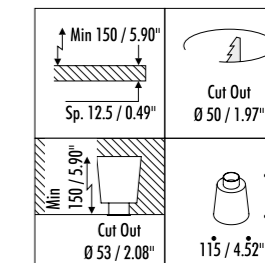

1A1490303	MATT WHITE - 3000K	24 V DC - 7 W LED - 36° 3000K - 546 lm - CRI > 90 / 2700K - 495 lm - CRI > 90
1A1490303-27	MATT WHITE - 2700K	COMPULSORY INSTALLATION KIT NOT INCLUDED
1A1490403	MATT BLACK - 3000K	PLASTERBOARD CUT-OUT Ø 50 mm
1A1490403-27	MATT BLACK - 2700K	MINIMUM SPACE FOR MOUNTING 150 mm


COMPULSORY INSTALLATION KITS

50240990	STANDARD	DRIVER LED INPUT 120 V - 60 Hz - OUTPUT 24 V DC - MAX 15 W - IP68 1-10 V DIMMABLE
----------	----------	---

OPTIONAL INSTALLATION KITS

1A1500003	STANDARD	INSTALLATION BOX CUT-OUT Ø 53 mm - MINIMUM SPACE FOR MOUNTING 150 mm
-----------	----------	---

1A1660003	STANDARD	DRIVER CONNECTORS IP68 - 2 PIECES
-----------	----------	-----------------------------------

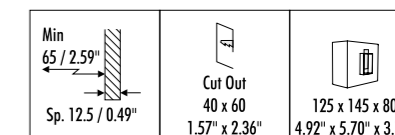

1A1510303	MATT WHITE - 3000K	MAX 500 mA DC - 2 W LED 3000K - 133 lm - CRI > 90 / 2700K - 128 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED PLASTERBOARD CUT-OUT 40 x 60 mm MINIMUM SPACE FOR MOUNTING 65 mm
1A1510303-27	MATT WHITE - 2700K	

COMPULSORY INSTALLATION KITS


50241070	STANDARD	DRIVER LED INPUT 120 V - 60 Hz - OUTPUT 500 mA DC - 25 W - IP68 NOT DIMMABLE

OPTIONAL INSTALLATION KITS

1A1520003	STANDARD	INSTALLATION BOX


OUTDOOR

IP 65



17230003	STANDARD	MAX 350 mA DC - 5,5 W LED - 3000K - 306 lm - CRI > 80 INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - IP67 - NOT DIMMABLE



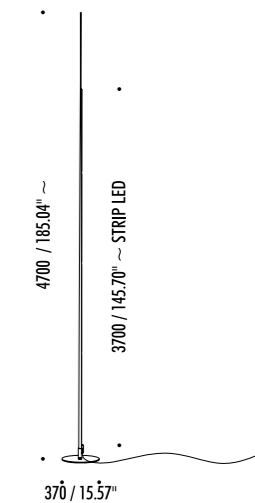


1A0890403	MATT BLACK	24 V DC - 40 W LED - 3000K - 2380 lm - CRI > 90 BLACK CABLE 5 m INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - IP67 - NOT DIMMABLE



Compasso d'Oro ADI
Award 2014

DESIGN ENZO CALABRESE - DAVIDE GROPPI - 2011
OUTDOOR LAMP - FIBERGLASS - METAL

IP 65

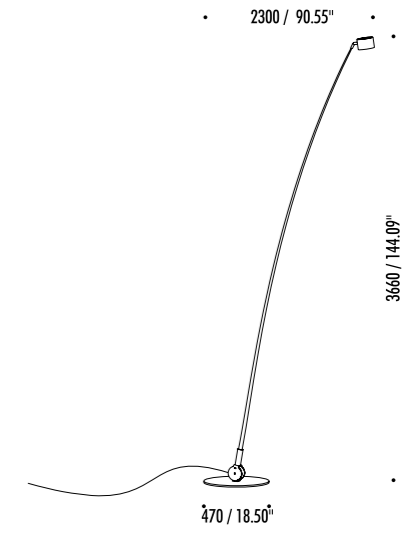

SAMPEI 440 OUTDOOR

17980303	MATT WHITE - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90 BLACK CABLE 5 m - ADJUSTABLE INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - IP67 - NOT DIMMABLE
17980303-27	MATT WHITE - 2700K	
17980403	MATT BLACK - 3000K	
17980403-27	MATT BLACK - 2700K	




DESIGN DANIELE SPREGA - 2012
OUTDOOR LAMP - METAL

GRILLO

CERTIFICATED 18560403 PRODUCT



IP 67

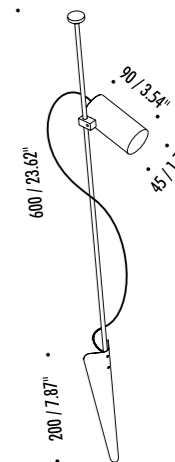

18560403	MATT BLACK	24 V DC - 4,2 W LED - 3000K - 282 lm - CRI > 90 ADJUSTABLE LED DRIVER NOT INCLUDED


COMPULSORY ACCESSORIES

51120110	STANDARD	DRIVER LED INPUT 100-240 V - 50/60 Hz - OUTPUT 24 V DC - 36 W - IP67 NOT DIMMABLE

OPTIONAL ACCESSORIES

18490403	MATT BLACK	ADDITIONAL LED HEAD 24 V DC - 4,2 W LED - 3000K - 282 lm - CRI > 90

17990003	STANDARD	ADDITIONAL STEM 1 m

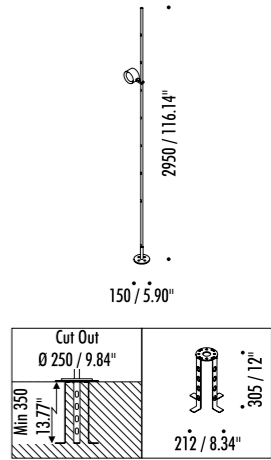



17390003	STANDARD - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90 BLACK CABLE 7 m - OPTIONAL INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 250 mm MINIMUM SPACE FOR MOUNTING 350 mm ADJUSTABLE INCLUDES LED DRIVER (700 mA DC) INPUT 100-240 V - 50/60 Hz - IP67 - NOT DIMMABLE
17390003-27	STANDARD - 2700K	

OPTIONAL INSTALLATION KITS

17730003	STANDARD	INSTALLATION ANCHORING BOLT

OPTIONAL ACCESSORIES

18510403	MATT BLACK - 3000K	ADDITIONAL LED HEAD
18510403-27	MATT BLACK - 2700K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90

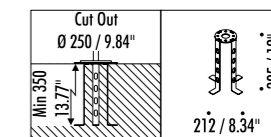

1A1440003	STANDARD - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90 BLACK CABLE 9 m - OPTIONAL INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 250 mm MINIMUM SPACE FOR MOUNTING 350 mm ADJUSTABLE INCLUDES LED DRIVER (350 mA DC) INPUT 100-240 V - 50/60 Hz - IP67 - NOT DIMMABLE
1A1440003-27	STANDARD - 2700K	


OPTIONAL INSTALLATION KITS

17730003	STANDARD	INSTALLATION ANCHORING BOLT

OPTIONAL ACCESSORIES



18510403	MATT BLACK - 3000K	ADDITIONAL LED HEAD
18510403-27	MATT BLACK - 2700K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI > 90

IP 65

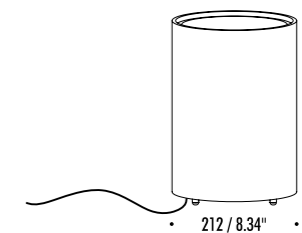

15600303	MATT WHITE	120 V - 60 Hz - MAX 18 W LED - E26 BLACK CABLE 5 m - LED BULB NOT INCLUDED

IP 65

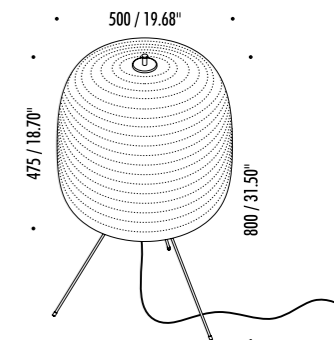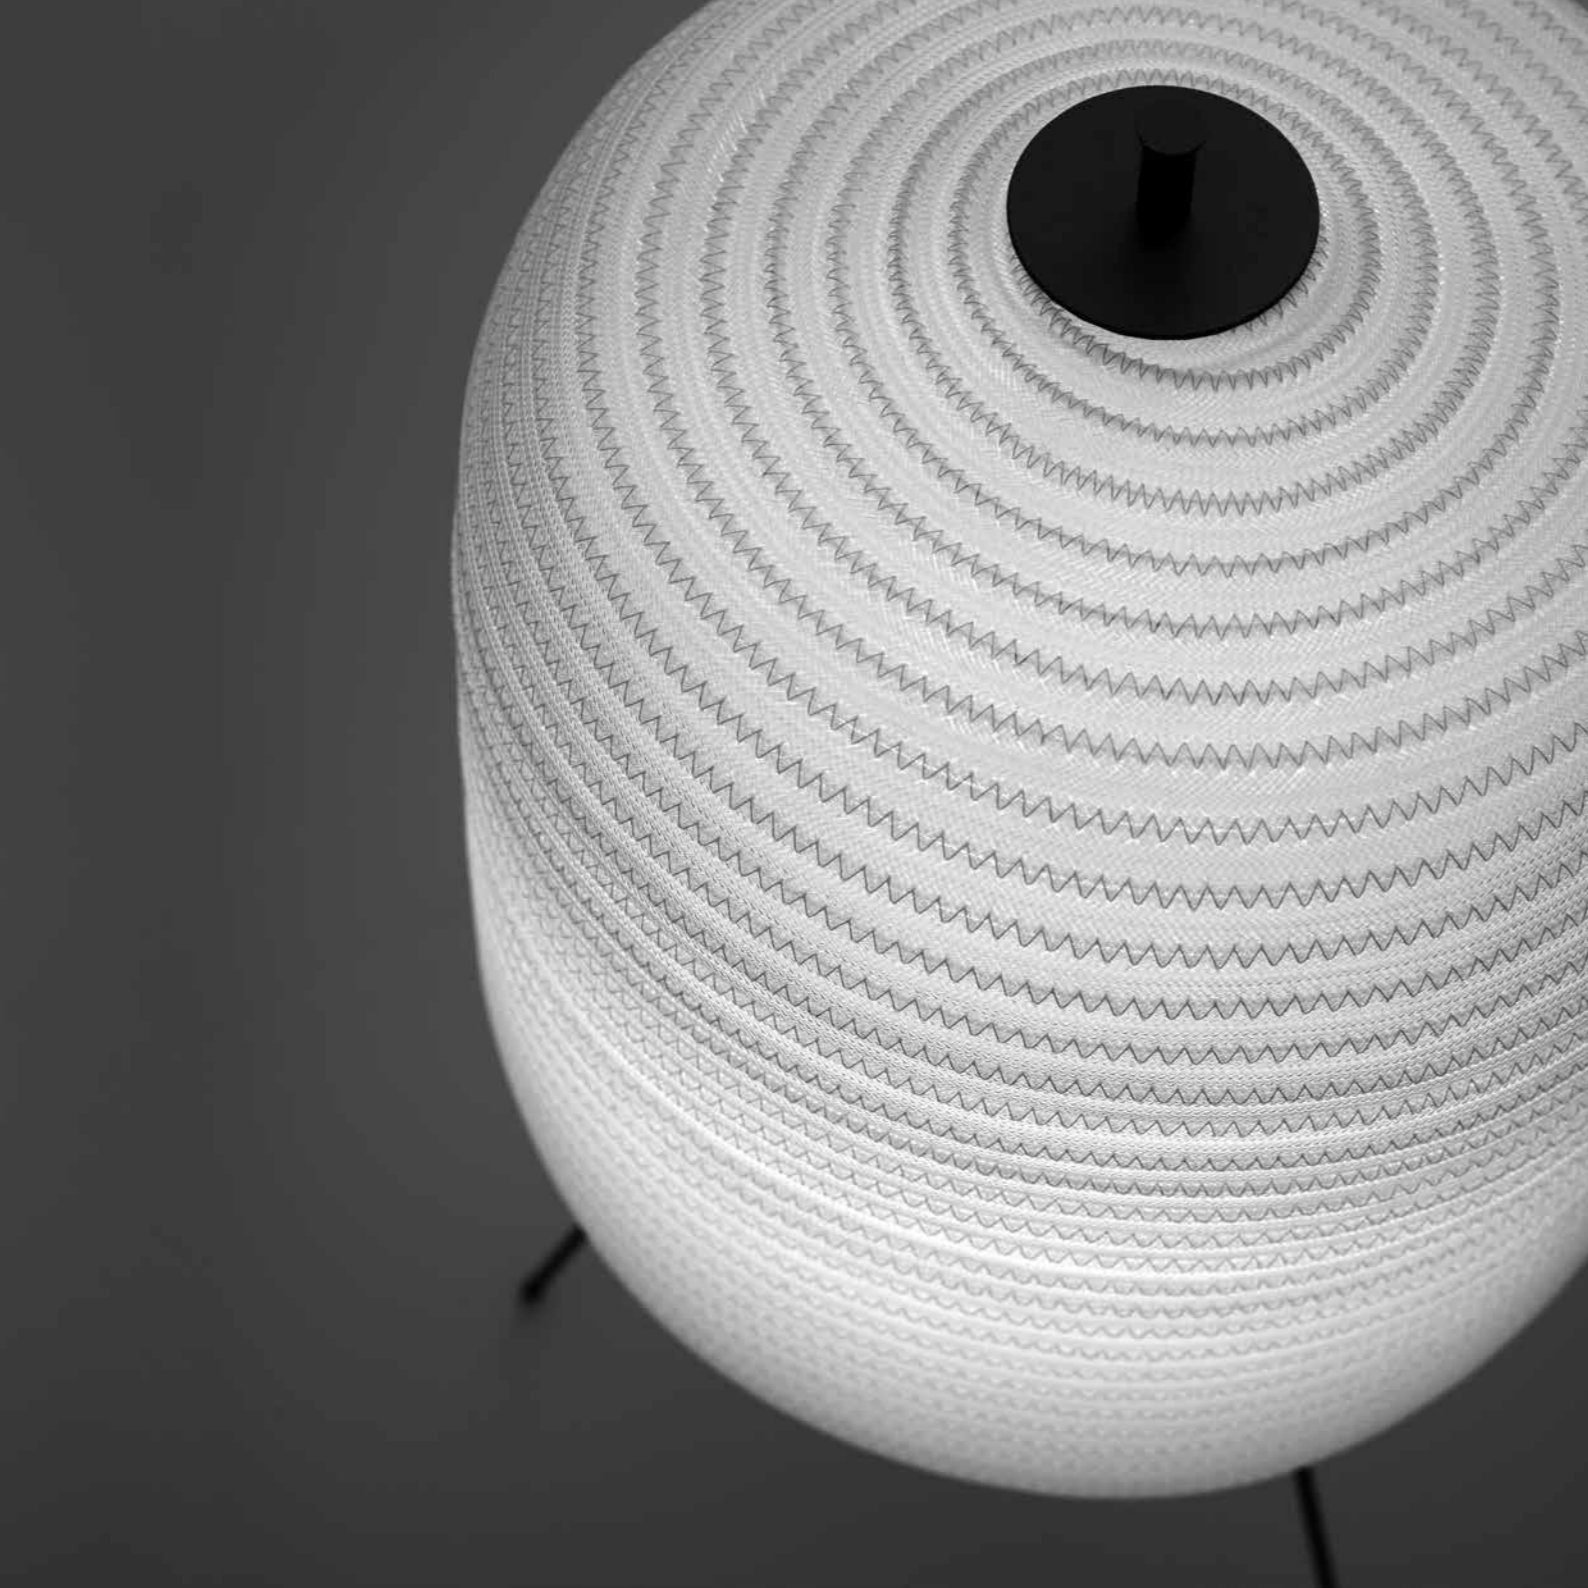


18860003	STANDARD	120 V - 60 Hz - MAX 18 W LED - E26 BLACK CABLE 5 m - LED BULB NOT INCLUDED



16 / 0.63"



35 / 1.38"

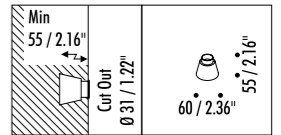

1A1530303	MATT WHITE - 3000K	MAX 350 mA DC - 1 W LED - 3000K - 33 lm - CRI > 90 / 2700K - 31 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 31 mm MINIMUM SPACE FOR MOUNTING 55 mm
1A1530303-27	MATT WHITE - 2700K	
1A1531103	POLISHED STAINLESS STEEL - 3000K	
1A1531103-27	POLISHED STAINLESS STEEL - 2700K	


COMPULSORY INSTALLATION KITS

1A1540003	STANDARD	INSTALLATION BOX
-----------	----------	------------------

50240880	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 350 mA DC - 17 W - IP68 NON DIMMERABILE - NOT DIMMABLE
----------	----------	---

1A1660003	STANDARD	DRIVER CONNECTORS IP68 - 2 PIECES
-----------	----------	-----------------------------------




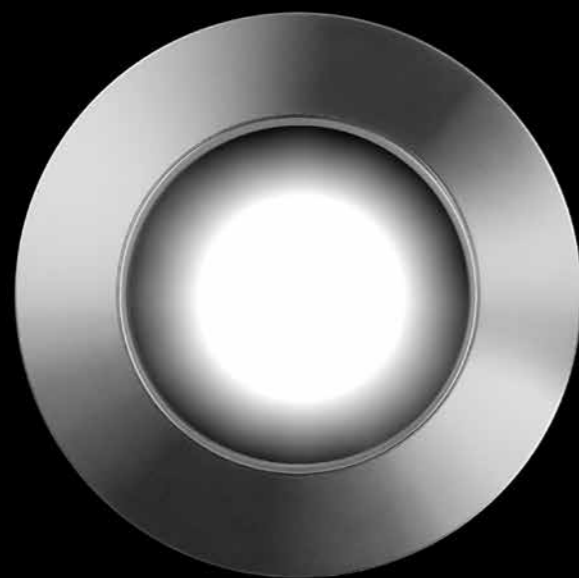

37 / 1.46"



58 / 2.28"

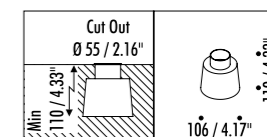




1A1551103	POLISHED STAINLESS STEEL	24 V DC - 7 W LED - 36° - 3000K - 546 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 55 mm - MINIMUM SPACE FOR MOUNTING 110 mm

COMPULSORY INSTALLATION KITS

1A1560003	STANDARD	INSTALLATION BOX

51490120	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 24 V DC - 36 W - IP67 NOT DIMMABLE


1A1660003	STANDARD	DRIVER CONNECTORS IP68 - 2 PIECES

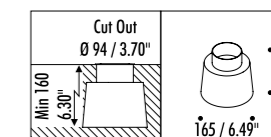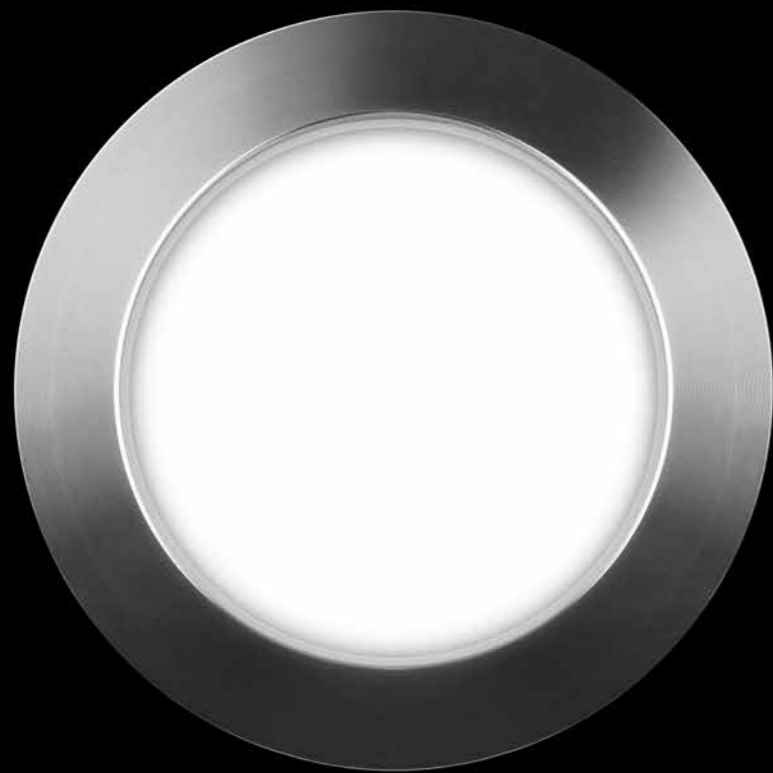

1A1571103	POLISHED STAINLESS STEEL - 10°	MAX 500 mA DC - 20 W LED - 10° - 3000K - 2058 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 94 mm - MINIMUM SPACE FOR MOUNTING 160 mm
1A1581103	POLISHED STAINLESS STEEL - 23°	MAX 500 mA DC - 20 W LED - 23° - 3000K - 2058 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 94 mm - MINIMUM SPACE FOR MOUNTING 160 mm

COMPULSORY INSTALLATION KITS

1A1590003	STANDARD	INSTALLATION BOX
50241070	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 500 mA DC - 25 W - IP68 NOT DIMMABLE
1A1660003	STANDARD	DRIVER CONNECTORS IP68 - 2 PIECES



1A1600403	MATT BLACK - 10°	MAX 500 mA DC - 2 W LED - 3000K - 133 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED ADJUSTABLE OPTIONAL ACCESSORIES SEE PAGE 283
1A1610403	MATT BLACK - 25°	



COMPULSORY INSTALLATION KITS

50241070	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 500 mA DC - 25 W - IP68 NON DIMMERABILE - NOT DIMMABLE
----------	----------	---

1A1660003	STANDARD	DRIVER CONNECTORS IP68 - 2 PIECES
-----------	----------	-----------------------------------



OPTIONAL ACCESSORIES

1A1620003	STANDARD	EARTH SPIKE	
1A1630003	STANDARD	WALL BACK PLATE	

Davide Groppi srl is constantly revising its products in order to offer the best and latest technology available.
This is why its catalogues and technical notes are in constant evolution.
You can find the latest information and technical updates on our website www.davidegroppi.com

CRI (Color Rendering Index)

The degree of colour distortion under a given light source in comparison with a reference light source.
The optimum colour rendition index is Ra = 100.

LUMINOUS FLUX

The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source.
In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement.
In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.

General terms.

This price list replaces any other previous one.

Davide Groppi srl reserves the right to change its products without notice. In this case, the descriptions printed here are not binding.

The sizes are expressed in millimeters and inches.

Prices are in Euro, excluding VAT.

Shipment.

Returned merchandise must be authorized in writing by Davide Groppi srl.

Any claim must be made in writing to Davide Groppi srl within 7 days of the delivery date. If not, will not be accepted.

Warranty.

All products are guaranteed for 24 months from the date of delivery.

The warranty is not valid for damage caused by third parties.

Any damage resulting from improper installation or changes to products cannot be considered the responsibility of Davide Groppi srl.

Rights.

No part of this price list may be reproduced or transmitted in any form or by any means: electronic, mechanical or otherwise, without the written permission of Davide Groppi srl.

Jurisdiction.

For any dispute, Piacenza, Italy, will be the court of jurisdiction.

Privacy.

Davide Groppi srl protects the confidentiality of personal data as provided to articles 12, 13 and 14 of the European Regulation n. 679/2016 (GDPR).

35MM	17	MORSETTO P	123
BUBKA - cETLus certification	265	MOVIE	55
BUBKA BOLLARD - cETLus certification	267	NEURO - cETLus certification	67
BUCO 58 - cETLus certification	251	NULLA - cETLus certification	233
CALVINO	29	NULLA 25 - cETLus certification	239
CARTESIO	91	NULLA 25 T24 - Title 24 Compliant and cETLus certification	241
CARTESIO 90	91	NULLA PL	159
CATHODE	85	OHM ABSOLUTE	191
ChainDelier 1	93	OHM ROUNDTrip	197
ChainDelier 2	95	ORIGINE 290	35
DOT ENDLESS	217	ORIGINE 390	35
DOT ENDLESS IOT	219	ORIGINE 490	35
DOT P - cETLus certification	119	ORIGINE OUTDOOR	259
DOT PL	161	OUT 35 - cETLus certification	279
DOT SISTEMA - cETLus certification	229	OUT 44 - cETLus certification	287
EDISON'S NIGHTMARE	145	OUT 58 - cETLus certification	283
ENDLESS	207	OUT 100 - cETLus certification	285
FILM	153	OVO	89
FLASH 6 - cETLus certification	179	OVONELPIATTO	87
FLASH 12 - cETLus certification	181	OZEN - cETLus certification	141
FOIL	135	OZEN VETRO - cETLus certification	143
FOIL LED - cETLus certification	135	PABLO	53
FOLDER	137	PAGINA	147
FOSBURY	71	PIGRECO	25
GRILLO - cETLus certification	263	PIÙ - cETLus certification	139
HAKO PL LED	169	PoPuP	13
HASHI	51	PUNTO PL	167
IMU	257	Q	57
INFINITO 6 - cETLus certification	175	QUAD - cETLus certification	253
INFINITO 12 - cETLus certification	177	RAIL	149
LED IS MORE	65	SAMPEI 230	41
LENTA	269	SAMPEI 260	41
LIGHT MY FIRE	21	SAMPEI 290	43
MASAI - cETLus certification	47	SAMPEI 440	43
MERIDIANA - cETLus certification	223	SAMPEI 440 OUTDOOR	261
MINI - cETLus certification	245	SANMARTINO	157
MINI BIT - cETLus certification	247	SHANGHAI	99
MINI PL - cETLus certification	165	SHOJI	61
MIRA - cETLus certification	107	SHOJI OUTDOOR	271
MIRA MAGNETIC	111	SIMBIOSI	79
MIRA MAGNETIC P	115	SISTEMA - EUTRAC dLus certification	227
MIRA R - cETLus certification	249	SOL 1	131
MIRA SWITCH - cETLus certification	109	SOL 1 LED - cETLus certification	131
MISS 1 - cETLus certification	81	SOL 2	133
MISS 2 - cETLus certification	83	SOL 2 LED - cETLus certification	133
MOON 60 - cETLus certification	73	SPOT	121
MOON 60 DE - cETLus certification	75	SPOT ENDLESS	213
MOON 80 - cETLus certification	73	SPOT ENDLESS IOT	215
MOON 120 - cETLus certification	77	TeTaTeT	7
MOON 200 - cETLus certification	77	TeTaTeT Flûte	11
MOON F - cETLus certification	59	TOAST - cETLus certification	127
MOON T - cETLus certification	27	TOAST LED - cETLus certification	125
MORSETTO	31	TRICK TRACK	163

davidegroppi.com

Davide Groppi srl
Via Belizzi 20 / 22
29122 Piacenza - Italia
Ph. +39.0523.571590
info@davigroppi.com

Davide Groppi srl © 2021
Società soggetta a direzione e coordinamento di Italian Design Brands spa